

ARGENT DATA OPENTRACKER+

KONFIGURASI DASAR

OpenTracker Configuration

Profile 1 | Profile 2

Firmware Build 54568

Callsign

YD1ION-9

1200 Baud

300 Baud

Path

WIDE2-1

Alternate Paths

Symbol

Car

Table

/

Code

>

Temp. Adjust

0

°C

Quiet Time

10

Text

ARGENT OpenTracker+

In

Comment

Status

Every

0

Transmissions

Transmission Control

TX Every

30

Sec

Use SmartBeaconing

Settings

Use PTT Input

Enable timeslotting

Timeslot

0

Tuning/Diagnostics

Profile Switching

Reporting Options

Altitude

DA0

Course/Speed

Time

DHM

HMS

GPS Quality

Temperature

Voltage

Compressed

Telemetry every

0

Position

GPS

Fixed

N

°

W

°

Don't require GPS fix

Waypoint Output

Enable

6

Characters

Use Custom Symbols

Limit To

Miles

Counter

Enable

Reset on Transmit

250

debounce (mSec)

Power Control

Enable

Active Low

5

delay (seconds)

Radio Interface

Load Firmware From

File

Web

min

max

TX Audio Level

248

TX Delay (mSec)

Don't transmit if supply <

0.00

Volts

Invert Carrier Detect

Software DCD

No PTT out on PTT in

External Squelch

Metric

English


Copy from Profile 2

Save to File

Load from File


Write

Quit

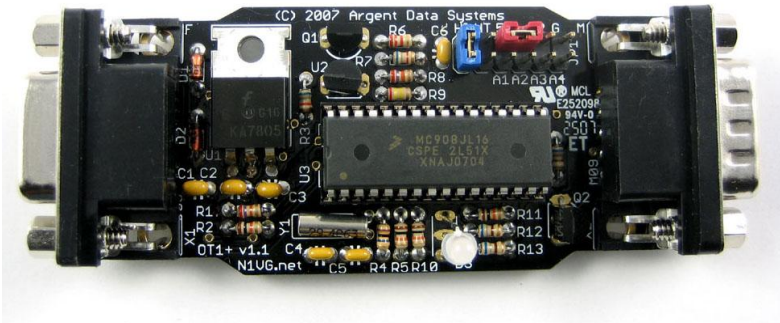


DATA

DB9 Male

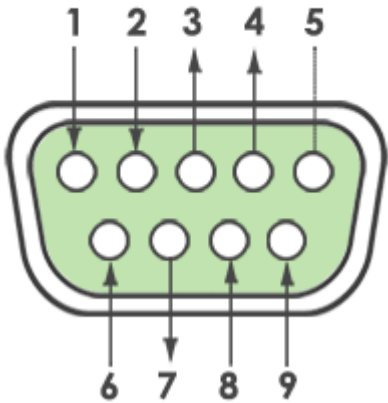


PIN	FUNGSI	WARNA KABEL
2	RX	PUTIH
3	TX	HIJAU
5	Ground	HITAM

KONFIGURASI KABEL DATA

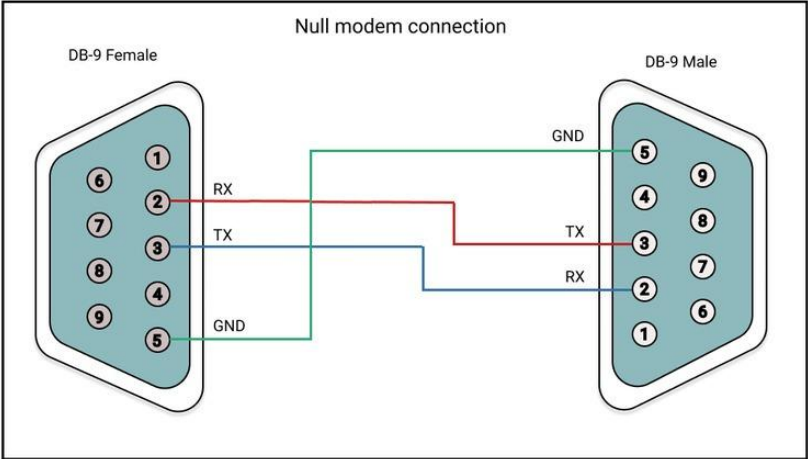

RADIO

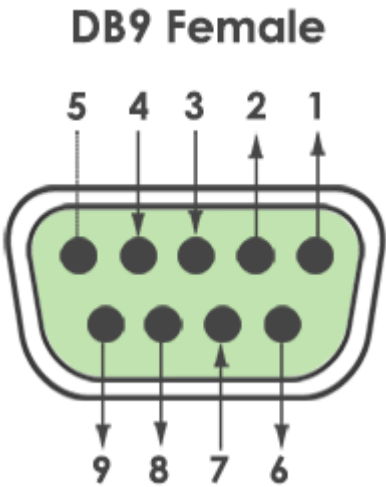

PIN	FUNGSI	WARNA KABEL	KET
1	Audio Out To SPK		SPK HT/RIG
3	PTT		
5	Audio Input To MIC		MIC HT/RIG
6	GND	HITAM	
7	VCC 12V	MERAH	