

ARGENT DATA TRACKER2 OT2M

KONFIGURASI DASAR

OpenTracker Configuration

Profile 1 | Profile 2

Firmware Build 54680

CallsignYD1ION-4

1200 Baud300 Baud

PathWIDE2-1

Alternate Paths

SymbolCar

Table / Code >

Temp. Adjust0 °C

Quiet Time16

TextArgent Data System

In

CommentStatus

Every0

Transmissions

Transmission Control

TX Every90

Sec

Skip1

if heard

Use SmartBeaconing

Settings

Use PTT Input

Enable timeslotting

Timeslot0

Tuning/Diagnostics

Profile Switching

Access List

Digi Config

Script Editor

Serial Ports

Baud Rate

Mode

A

4800

Auto

B

9600

Garmin

Autobaud

Load Firmware From

File

Web

Radio Interface

min

max

TX Audio Level

248

TX Delay (mSec)

Don't transmit if supply <

0.00

Volts

Invert Carrier Detect

Software DCD

No PTT out on PTT in

External Squelch

Position

GPSFixedSave

N

*

W

*

Don't require GPS fix

Waypoint Output

Enable

9

Characters

Use Custom Symbols

Limit To0

Miles

Counter

Enable

Reset on Transmit

250

debounce (mSec)

Power Control

Enable

Active Low

5

delay (seconds)

MetricEnglish

Copy from Profile 2

Save to File

Load from File


Write

Quit




DATA

DB9 Male

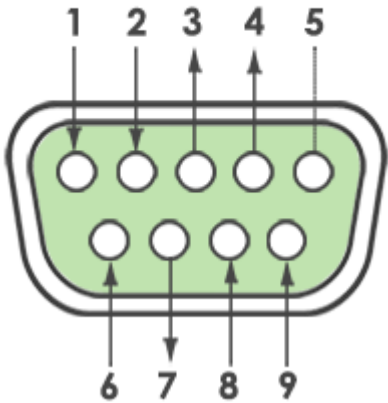


PIN	FUNGSI	WARNA KABEL
2	RX	PUTIH
3	TX	HIJAU
5	Ground	HITAM

KONFIGURASI KABEL DATA

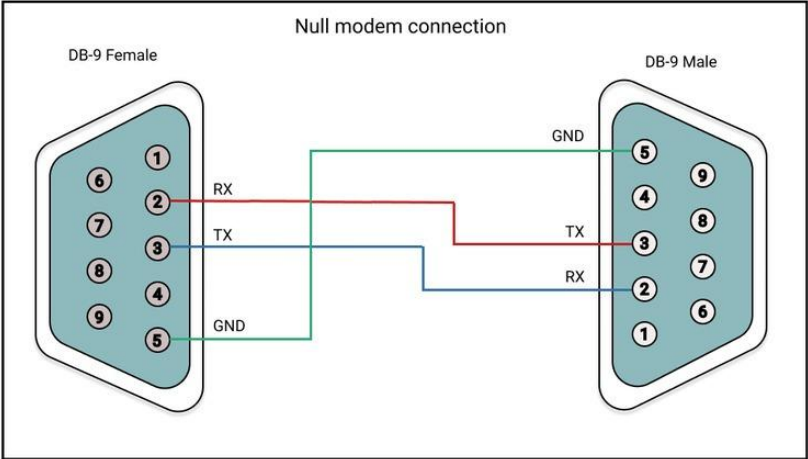

RADIO

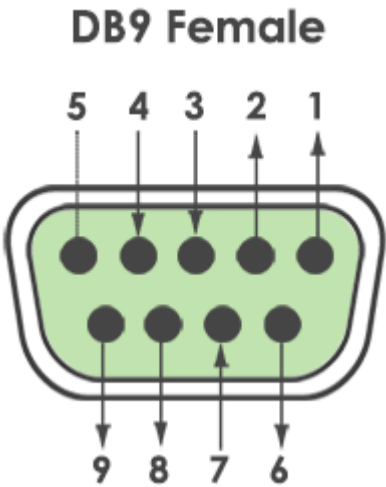

PIN	FUNGSI	WARNA KABEL	KET
1	Audio Out To SPK		SPK HT/RIG
3	PTT		
5	Audio Input To MIC		MIC HT/RIG
6	GND	HITAM	
7	VCC 12V	MERAH	