28/4/2026

Practical-10

Aim: Simulate RIP using CISCO Packet Tracer

Assign IP address to PCs

Double click PCs & click desktop menu item & click IP configuration.

Assign IP address to interfaces of routers.

Double click Router 0 & click CLI & press Enter key to access the command prompt of Router 0.

Router > enable
Router # configure
terminal
Enter configuration commands, one per line.
End with CNTL/Z

Router (config) # interface fast Ethernet 0/0
Router (config-if) # ip address 10.0.0.1
255.0.0.0 Router (config-if) # no shutdown
Router (config-if) # exit
Router (config) #

Interface fast Ethernet 0/0 command is used to enter in interface mode.

ip address 10.0.0.1 255.0.0.0

command will assign IP address to interface.

no shutdown - will bring interface up

Router#show controllers serial 0/0/0

Interface Serial0/0/0

Hardware is PowerQUICC MPC860

DCE V.35, clock rate 2000000

Router#configure terminal

Enter configuration commands, one per line. End with CNTL/Z

Router(config)# interface serial 0/0/0

Router(config-if)# ip address 192.168.1.249.

255.255.255.252

Router(config-if)# clock rate 64000

Router(config-if)# bandwidth 64

Router(config-if)# no shutdown

Router(config-if)# exit

Configure RIP routing Protocol

Router 0(config)# router rip

Router 0(config-router)# network

10.0.0.0

Router 0(config-router)# network 192.168.1.252

Router 1


Router1(config)# router rip


Router1(config-router)# network 192.168.1.244


Router1(config-router)# network 192.168.1.248

Router 2 (Similarly)

~~Router2(con~~

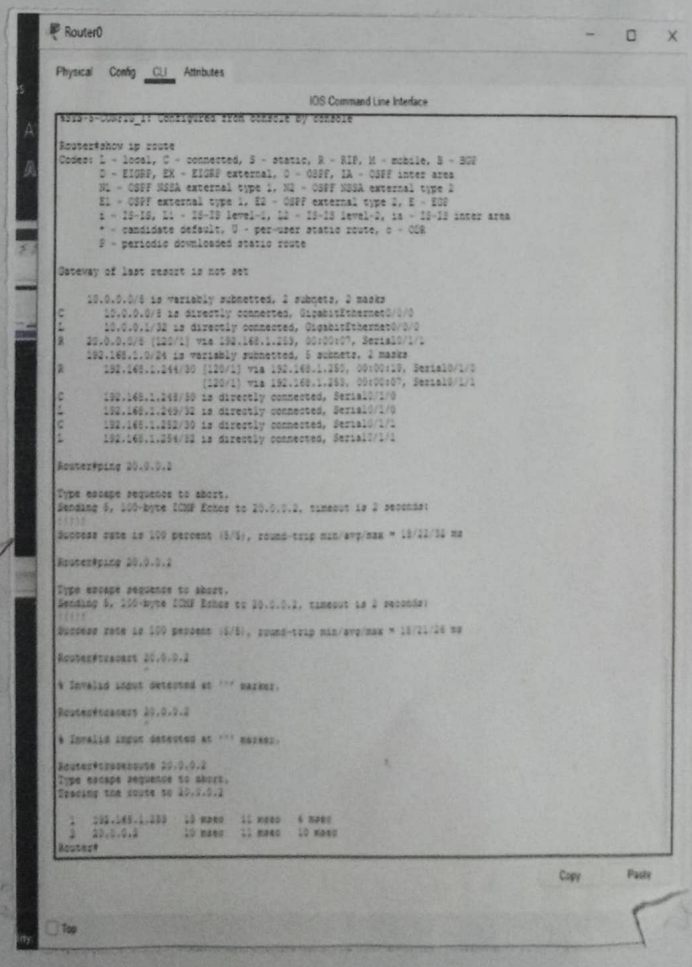

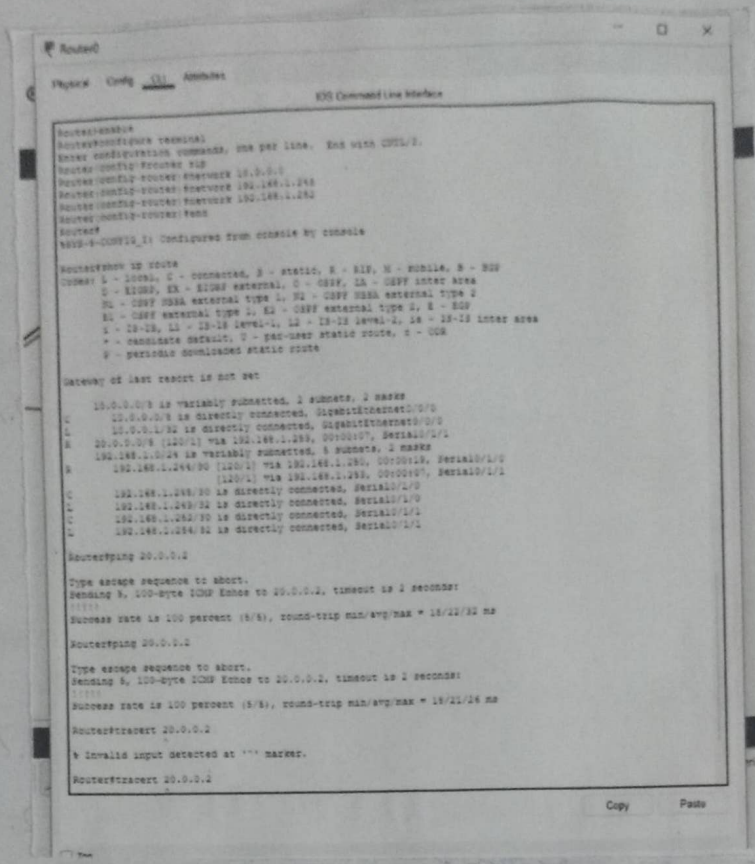

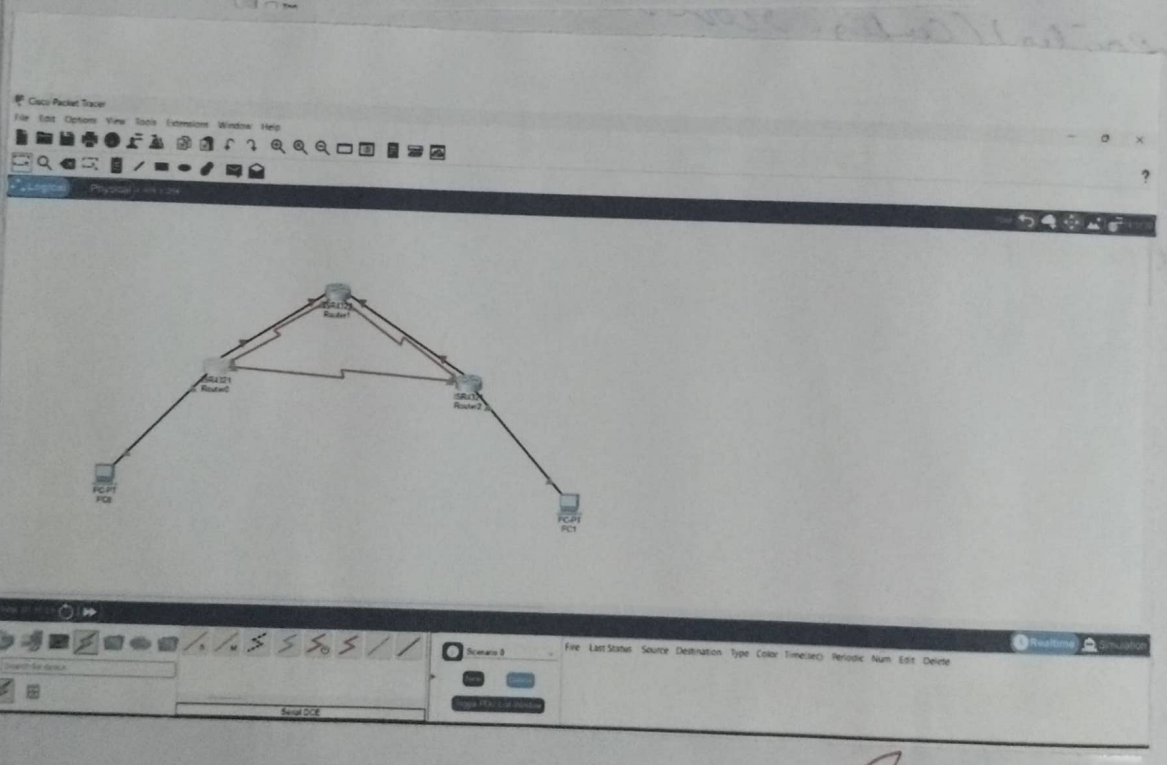

Result: Hence, simulation using CISCO Packet Tracer was successfully executed.