29/9/26

EXPERIMENT- II(a)

SIMULATE STATIC ROUTING CONFIGURATION USING CISCO PACKET TRACER

The following table list the connected network of each router.

Router	Available network on local interface	Network available on other routers
Router 0	10.0.0.0/8, 20/0.0.0, 18, 40.0.0.0/8	30.0.0.0/8, 50.0.0.0/8
Router 1	20.0.0.0/8, 30.0.0.0/8 50.0.0.0/8	10.0.0.0/8, 40.0.0.0/8
Router 2	40.0.0.0/8, 50.0.0.0/8	10.0.0.0/8, 20.0.0.0/8, 30.0.0.0/8

Router 0 requirements:

- Create 2 router for network 30.0.0.0/8 & configure the 1st router as the main & the 2nd router as backup
- Create two routers for the host 20.0.0.0@100/8 & configure the 1st router as main & second as backup.

• Verify the router adds only main routes to the configure table.

ROUTER 0 CONFIGURATION:

Router > enable
Router # configure
terminal
Enter configuration commands, one per
line
End with CNTL/Z
Router (config)# ip route 30.0.0.0 255.0.0.0. 20.0.2.1
Router (config)# ip route 30.0.0.0 255.0.0.0 40.0.0.2.20
Router (config)# ip route 30.0.0.0 255. 255.255.255 40.0.0.2
Router (config)# ip route 50.0.0.0. 255.0.0.0 40.0.0.2
Router (config)# ip route 50.0.0.0 255.0.0.0 20.0.0.2
Router (Config)# exit
Route # Show IP route static
30.0.0.0/8 is variably subnetted, 2
subnets 2 masks S 30.0.0.0/8 [10/0]
via 20.0.0.2 S 30.0.0.100/32 [10/10] via

similarly we can configure the router 1, 2
requirements & we can configure the
router 1, 2.

Verifying static routing

On Router 0, we configured 2 routes
& network 30.0.0.0/8 these route via

power, & via route 2. 1st route as main route, 2nd as backup.


→ By sending ping recover to p of network 30.0.0.0/8 & training to path we can use trace command.

→ By using the routing task entries on router 0.

to static delete.

→ note down router to be deleted

→ use the no ip route command to delete route

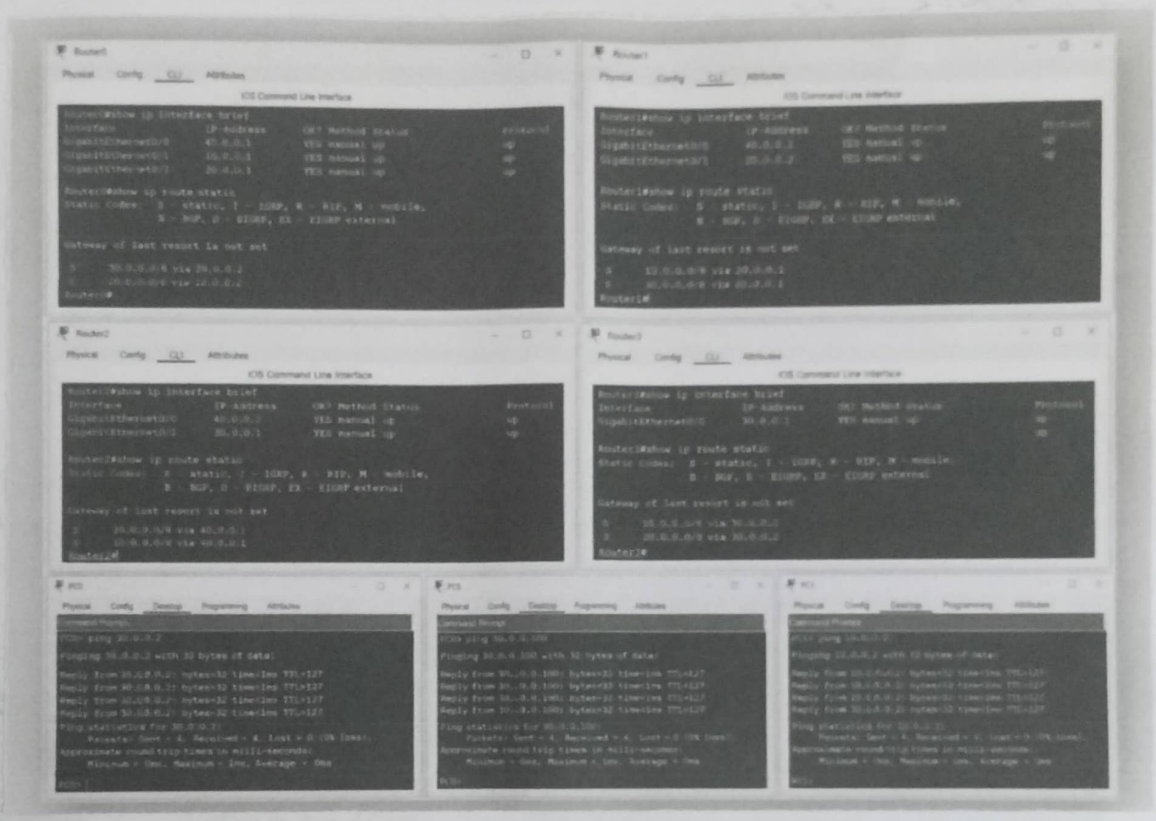

Result :

Thus the static routing configuration was implemented using Cisco Packet Tracer.