EXPERIMENT NO: 03

30/7/2026

CISCO PACKET TRACER

Aim: To study the Packet tracer tool installation & user interface overview.

Introduction: Packet Tracer is an exciting network design, simulation & modelling tool.

→ it allows you to model complex systems without the need for dedicated equipment.

→ it helps you to practice your network configuration & troubleshooting skills via computer or an android or iOS based mobile device

Installing Packet Tracer:

Go to: https://www.netacad.com & log in with your Cisco networking academy credentials. click Packet Tracer graphic & download the package appropriate for your OS.

User Interface Overview:

Layout of Packet tracer is divided into several components. The components of the Packet Tracer Interface are as follows -

1. Menu bar - used to open, save, print, change preferences & so on.

2. Main toolbar - This bar provides shortcuts icons to menu options that are

commonly accessed, such as open, save, zoom, undo & redo, on the right-hand side is an icon for entering network information for the current network.

3. Logical/Physical workspace tab- these tabs allow you to toggle between the logical & physical work areas.

4. Workspace - the area where topologies are created & simulations are displayed.

5. Common tools bar- toolbar provides controls for manipulating topologies, such as select, move layout, place note, delete, inspect, resize shape, & add simple/complex PDU.

6. Realtime/Simulation bar- used to toggle between the real & simulation modes.

7. Network component bar- contains all of the network & end devices available with Packet Tracer, & is further divided into 2 areas: Area 7a: - Device - type selection box, area: 7b - device specific selection box.

8. User-Created packet box - users can create highly-customized packets to test their topology from this area, & the results are displayed as a list.

Analyse the behaviour of network devices using CISCO PACKET TRACER simulator

1. From the network component box, click & drag-& drop below components:
   a. 4 Generic PCs & One HUB
   b. 4 Generic PCs & One Switch

2. Click on Connections:
   a. click on Copper Straight-Through Cable.
   b. Select one of the PC & connect it to HUB using the cable. The link LED should glow in green, indicating that the link is up. similarly connect remaining 3 PCs to the HUB.
   C. Similarly connect 4PCs to the switch using copper straight-through cable.

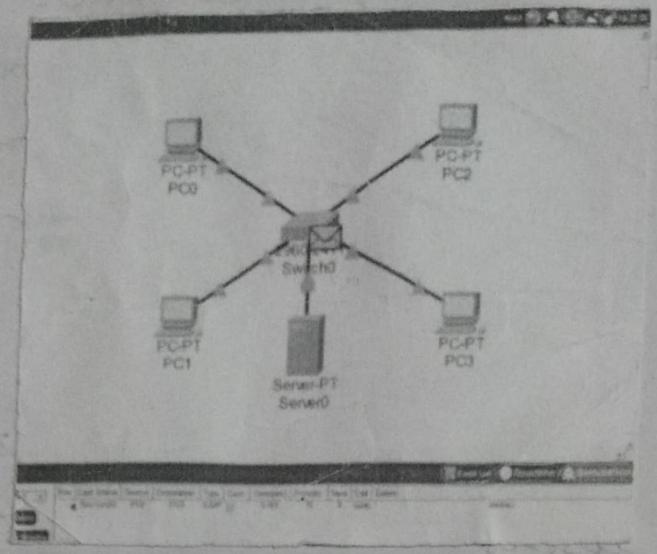


Fig: Switch

3. Click on the PCs connected to hub, go to the Desktop tab, click on IP configuration, & enter & IP address & subnet mask.

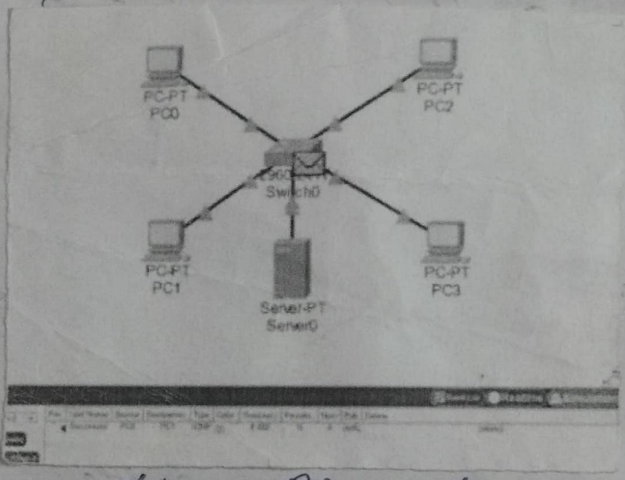


Fig: Hub

click on the PDU from the common tool bar.

a. Drag & drop it on one of PC & then drop it on Another PC connected to the HUB.

4. Observe the flow of PDU from source to PC to destination PC by selecting the Real-time mode of simulation.

5. Repeat step 3 to step 5 for the PCs connected to switch.

6. Observe how HUB & switch are forwarding the PDU & write your observation & conclusion about the behaviours of switch & HUB.

Result: Thus, packet tracer tool Installation & its working was studied.