

# Lunar Lander

Project #1 for Artificial Intelligence Fundamentals

Francisco Silva, Miguel Pereira and Guilherme Rodrigues  
Nº 2022213583, 2022232552 and 2022232102

Department of Informatics Engineering  
University of Coimbra, Coimbra, Portugal  
**{francisco.lapamsilva,miguelmpereira0409,grf04}@gmail.com**

March 9th, 2025

Contents

1 Introduction 3

2 Perceptions 3

2.1 Zoning System . . . . . 3

2.2 Perceptions . . . . . 3

3 Actions 4

3.1 Action Definition . . . . . 4

4 Production System 4

4.1 Basic Production System . . . . . 4

4.2 Constants . . . . . 4

4.3 Final Production System . . . . . 5

5 Conclusion 6

# 1 Introduction

## 2 Perceptions

We use built-in perceptions of the lander and a zoning system that determines safe and unsafe zones, so that the lander reacts according to its placement, as described in Figure 1.

### 2.1 Zoning System

The Zoning System helps us determine where to do what. We consider zones **G** and **H** to be difficult to move the Lunar Lander to the landing zone, so we move them up to zones **E** and **F**. Zones **E** and **F** are almost acceptable, we have to move the to, which we call the chimney. The chimney is in zones **B**, **C**, and **D**. They're the zones where we move the lander down while trying to center it in the middle of the landing. **C** and **D** make the small adjustments to get the lander to the **B** zone, where it slowly descends to zone **A**. Zone **A** is where we determine that the Lunar Lander is in a safe enough place that we can turn off the jets and safely land it without the need for minor adjustments.

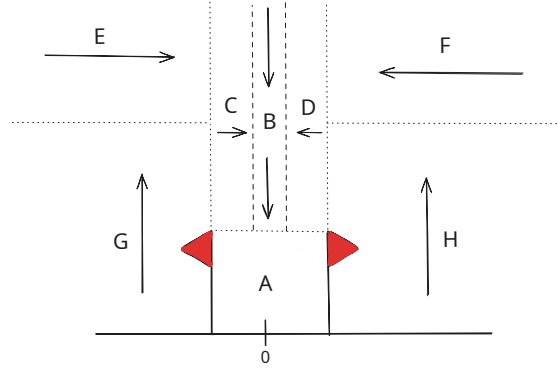


Figure 1: Zoning System of the lunar landing

The positioning of each zone was determined by enabling the *Keyboard Agent* mode and disabling the *fail condition* in the code, where the position of the agent is printed into console each frame.

### 2.2 Perceptions

We utilize the following perceptions to determine horizontal, vertical and angular speeds, as well as angular directions, if the left and right legs are touching the ground, and, again, the zoning systems.

- **Za**: Landing Zone
- **Zb**: Safest Descent Zone
- **Zc**: Left Safe Descent Zone
- **Zd**: Right Safe Descent Zone
- **Ze**: Left Upper Safe Zone
- **Zf**: Right Upper Safe Zone
- **Zg**: Left Unsafe Zone
- **Zh**: Right Unsafe Zone
- **Vx**: Horizontal velocity (positive rightward)
- **Vy**: Vertical velocity (positive upward)
- **A**: Angular direction (positive counter-clockwise)

- **Va**: Angular velocity (positive counter-clockwise)
- **L**: Left leg in ground contact
- **R**: Right leg in ground contact

### 3 Actions

To control the Moon Lander we utilized the actions that were given to us on different levels. They are ON, partially ON and OFF. The partially ON levels help us stabilize the Lunar Lander by making minor adjustments so we don't overshoot it and end up being in a unwanted state again.

#### 3.1 Action Definition

- **DN** : [0,0] Turns main and secondary motors off
- **Main**: [1.0,0] Turns main motor fully on and secondary off
- **Rl**: [0.1, -0.55] Rotates left
- **Rr**: [0.1, 0.55] Rotates right

### 4 Production System

#### 4.1 Basic Production System

To maximize successful landings our priority is maintaining the stability of the lander for better maneuvering. Only when the stability is guaranteed the lander tries to land. The basic set of instructions the lander must follow, regardless of position and/or zone are:

1.  $V_a^1 \geq \text{MAS} \rightarrow \text{Rr}$  prevents spinning
2.  $V_a \leq -\text{MAS} \rightarrow \text{Rl}$  prevents spinning
3.  $V_x^2 \geq \text{MXS} \rightarrow \text{Rl}$  prevents rightward drift
4.  $V_x \leq -\text{MXS} \rightarrow \text{Rr}$  prevents leftward drift
5.  $V_y^3 \geq \text{MYS} \rightarrow \text{Mp0}$  prevents ascending
6.  $V_y^4 \leq -\text{MYS} \rightarrow \text{Mp2}$  prevents excessive descent speed

#### 4.2 Constants

With the basic Production System we can create the final Production System, changing the constants values according to what the lander should do in its current zone. We also need to define constants, determining the values that we want to set for the perceptions.

Constants:

- **MAS**: Maximum Angular Speed 0.1
- **MXS**: Maximum Horizontal Speed 0.01
- **MYS**: Maximum Vertical Speed 0.1

---

<sup>1</sup> $V_a$ : angular velocity

<sup>2</sup> $V_x$ : horizontal velocity

<sup>3</sup> $V_y$ : vertical velocity (upwards)

<sup>4</sup> $V_y$ : vertical velocity (downwards)

### 4.3 Final Production System

The final production system adjusts control rules based on the current zone and observed velocities.

Zone A Rules:

1.  $Z_a, V_a \geq 0 \rightarrow R_r$  prevents lander spinning out
2.  $Z_a, V_a \leq 0 \rightarrow R_l$  prevents lander spinning out
3.  $Z_a, V_x \geq 0 \rightarrow R_l$  prevents lander moving right
4.  $Z_a, V_x \leq 0 \rightarrow R_r$  prevents lander moving left
5.  $Z_a, V_y \geq 0 \rightarrow D_n$  prevents lander flying away
6.  $Z_a, V_y \leq 0 \rightarrow \text{Main}$  prevents lander descending too fast
7.  $Z_a \rightarrow D_n$  move towards objective

Zone B Rules:

1.  $Z_b, V_a \geq 0 \rightarrow R_r$  prevents lander spinning out
2.  $Z_b, V_a \leq 0 \rightarrow R_l$  prevents lander spinning out
3.  $Z_b, V_x \geq 0 \rightarrow R_l$  prevents lander moving right
4.  $Z_b, V_x \leq 0 \rightarrow R_r$  prevents lander moving left
5.  $Z_b \rightarrow V_y \geq 0 \rightarrow D_n$  prevents lander flying away
6.  $Z_b, V_y \leq -MYS \rightarrow \text{Main}$  prevents lander descending too fast
7.  $Z_b, D_n$  move towards Zone A

Zone C Rules:

1.  $Z_c, V_a \geq 0 \rightarrow R_r$  prevents lander spinning out
2.  $Z_c, V_a \leq -MAS \rightarrow R_l$  prevents spinning, allows rotation right
3.  $Z_c, V_x \geq MXS \rightarrow R_l$  prevents moving too fast right
4.  $Z_c, V_x \leq 0 \rightarrow R_r$  prevents moving left
5.  $Z_c, V_y \geq 0 \rightarrow D_n$  prevents flying away
6.  $Z_c, V_y \leq -MYX \rightarrow \text{Main}$  prevents descending too fast, allows descent
7.  $Z_c \rightarrow R_r$  move towards Zone B

Zone D Rules:

1.  $Z_d, V_a \geq MAS \rightarrow R_r$  prevents spinning, allows rotation left
2.  $Z_d, V_a \leq 0 \rightarrow R_l$  prevents spinning
3.  $Z_d, V_x \geq 0 \rightarrow R_l$  prevents moving right
4.  $Z_d, V_x \leq -MXS \rightarrow R_r$  prevents moving too fast left
5.  $Z_d, V_y \geq 0 \rightarrow D_n$  prevents flying away
6.  $Z_d, V_y \leq MYX \rightarrow \text{Main}$  prevents descending too fast, allows descent
7.  $Z_d \rightarrow R_l$  move towards Zone B

Zone E Rules:

1.  $Z_e, V_a \geq 0 \rightarrow R_r$  prevents spinning
2.  $Z_e, V_a \leq 0 \rightarrow R_l$  prevents spinning

3.  $Z_e, V_x \geq \text{MXS} \rightarrow \text{Rl}$  prevents moving too fast right
4.  $Z_e, V_x \leq 0 \rightarrow \text{Rr}$  prevents moving left
5.  $Z_e, V_y \geq \text{MYS} \rightarrow \text{Dn}$  prevents flying up too fast
6.  $Z_e, V_y \leq 0 \rightarrow \text{Main}$  prevents descending too fast, allows descent
7.  $Z_e \rightarrow \text{Rr}$  moves towards Zone C

Zone F Rules:

1.  $Z_f, V_a \geq 0 \rightarrow \text{Rr}$  prevents spinning
2.  $Z_f, V_a \leq 0 \rightarrow \text{Rl}$  prevents spinning
3.  $Z_f, V_x \geq 0 \rightarrow \text{Rl}$  prevents moving right
4.  $Z_f, V_x \leq \text{MXS} \rightarrow \text{Rr}$  prevents moving too fast left
5.  $Z_f, V_y \geq \text{MYS} \rightarrow \text{Dn}$  prevents flying up too fast
6.  $Z_f, V_y \leq 0 \rightarrow \text{Main}$  prevents descending too fast, allows descent
7.  $Z_f \rightarrow \text{Rl}$  moves towards Zone D

Zone G Rules:

1.  $Z_g, V_a \geq 0 \rightarrow \text{Rr}$  prevents spinning
2.  $Z_g, V_a \leq -\text{MAS} \rightarrow \text{Rl}$  prevents spinning, allows rotation right
3.  $Z_g, V_x \geq \text{MXS} \rightarrow \text{Rl}$  prevents moving too fast right
4.  $Z_g, V_x \leq 0 \rightarrow \text{Rr}$  prevents moving left
5.  $Z_g, V_y \geq 0 \rightarrow \text{Dn}$  prevents flying away
6.  $Z_g, V_y \leq 0 \rightarrow \text{Main}$  prevents descending too fast, allows descent
7.  $Z_g \rightarrow \text{Main}$  moves towards Zone E

Zone H Rules:

1.  $Z_h, V_a \geq \text{MAS} \rightarrow \text{Rr}$  prevents spinning, allows rotation left
2.  $Z_h, V_a \leq 0 \rightarrow \text{Rl}$  prevents spinning
3.  $Z_h, V_x \geq 0 \rightarrow \text{Rl}$  prevents moving right
4.  $Z_h, V_x \leq -\text{MXS} \rightarrow \text{Rr}$  prevents moving too fast left
5.  $Z_h, V_y \geq 0 \rightarrow \text{Dn}$  prevents flying away
6.  $Z_h, V_y \leq 0 \rightarrow \text{Main}$  moves towards zone F
7.  $Z_h \rightarrow \text{Main}$  moves towards zone F

## 5 Conclusion

In order to achieve this system, we experimented different strategies. In the first phase, we only had 6 basic rules to not lose control and only after that we guaranteed that we had a rule per zone to move the lander in accordance with the position. This strategies did not pass of the 30% so we changed to this approach that made us go to 50%. The presented control system emphasizes stability prior to descent, relying on zone-specific velocity constraints and corrective actions. Further improvement is possible by optimizing threshold values, adjusting motor actions, modifying zone boundaries, and incorporating combined perceptions to handle complex scenarios beyond the current system's capabilities.