webfleet

Webfleet Video 2.0

Installation guide

v.Q4-2024

BRIDGESTONE
Solutions for your journey

Installation - The journey to customer satisfaction

1 What's in the box

2 Camera positioning

3 Camera orientation

4 Connections

5 Activation

webfleet

Cam Lite

What is in the box?

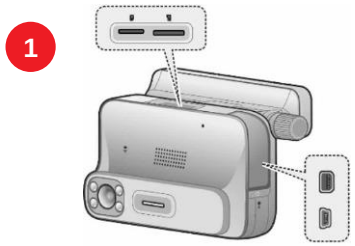

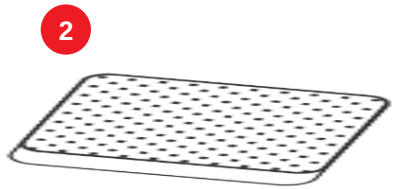



1. Dashcam
2. Mounting bracket
3. 128gb commercial grade MicroSD (inserted)
4. Hardwire kit for professional installation
   - 1x hardwire cable
   - 1x fuse cap
5. Security Hex tool for:
   - Removing SIM/SD card cover
6. User guide
7. Tamper-proof case

Cam Pro

What is in the box?

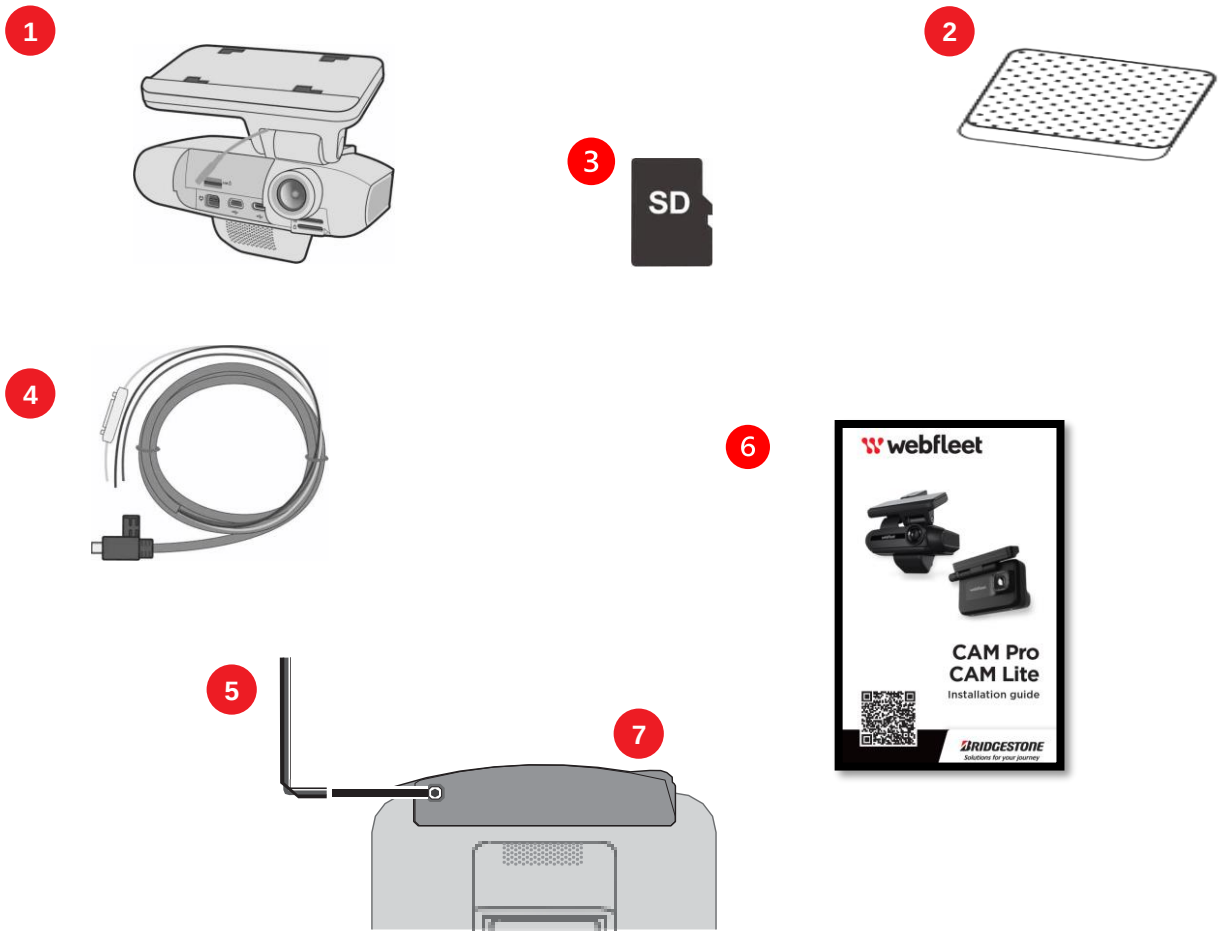

1. Dashcam
2. Mounting bracket
3. 128gb commercial grade MicroSD (inserted)
4. Hardwire kit for professional installation
   - 1x hardwire cable
   - 1x fuse cap
5. Security Hex tool for:
   - Removing SIM/SD card cover
6. User guide
7. Tamper-proof case

Mounting the camera on a left side driver

- The dash camera Cam Lite or Cam Pro must be mounted as high on the windscreen as possible.

- The dash camera Cam Lite or Cam Pro must be mounted on the centre-left side of the vehicle´s cabin when the driver is on the left side, as shown in the picture. At least 30 cms to the left from the rear mirror would be ideal, or from a vertical imaginary line on the middle of the windshield.

- Often, depending on the vehicle, the internal camera might be covered by the sun protector when in use. To avoid losing internal video events and/or DMS functionalities, consider installing the external DMS auxiliary camera.

- The dash camera must not obstruct the driver´s field vision for its own safety and in compliance with safety regulations.

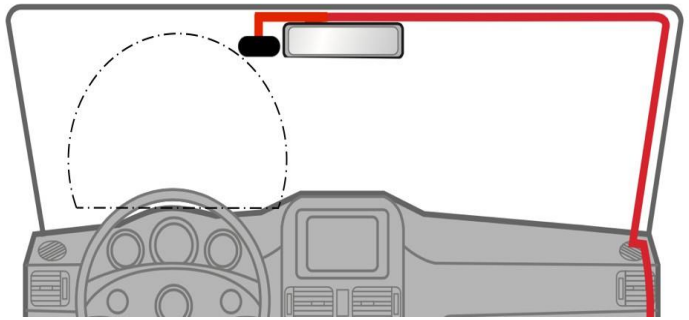

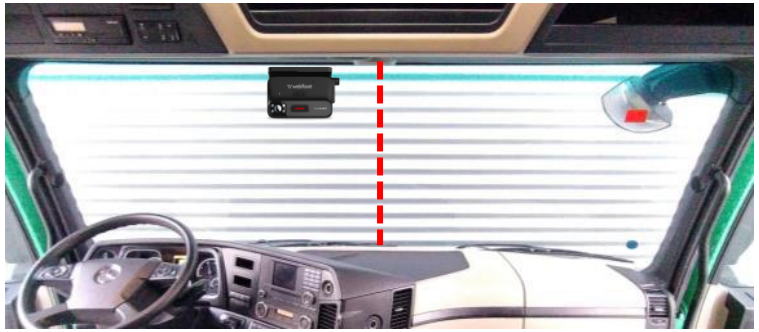

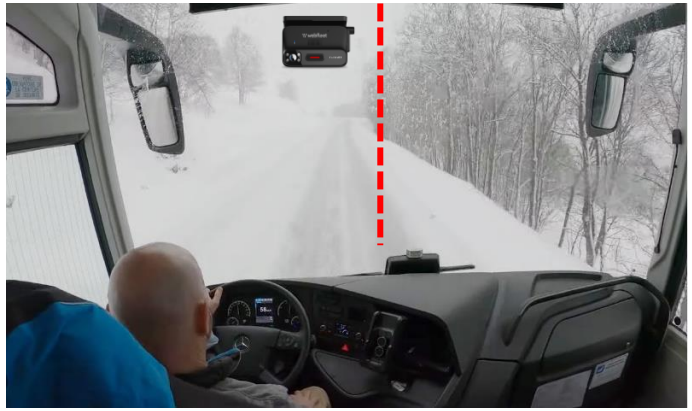

webfleet

Mounting the camera on a right-side driver (UK/AU)

- The dash camera Cam Lite or Cam Pro must be mounted as high on the windscreen as possible.

- The dash camera Cam Lite or Cam Pro must be mounted on the centre-right side of the vehicle´s cabin when the driver is on the right side, as shown in the picture. At least 30 cms to the right from the rear mirror would be ideal, or from a vertical imaginary line on the middle of the windshield.

- Often, depending on the vehicle, the internal camera might be covered by the sun protector when in use. To avoid losing internal video events and/or DMS functionalities, consider installing the external DMS auxiliary camera.

- The dash camera must not obstruct the driver´s field vision for its own safety and in compliance with safety regulations.

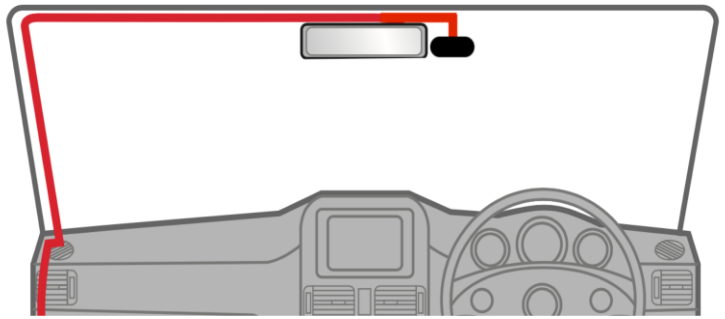

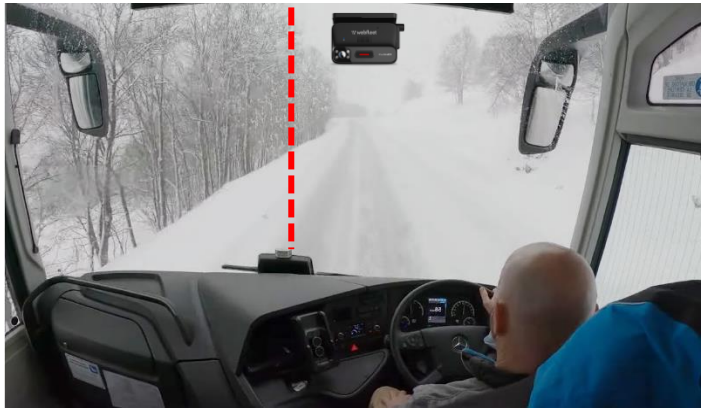

webfleet

Road lens orientation

- The dash camera Cam Lite or Cam Pro outward lens, must be oriented in a way that the middle of the video/image frame coincides with an imaginary horizontal line with the end of the road/horizon level.
- The horizon level can be easily adjusted with the Webfleet Installers App.
- Any object in front of the camera view and stains, reflections and similar on the windshield, can have a negative impact in the AI detections.
- Windshield wiper don’t have any negative impact in the AI detection.

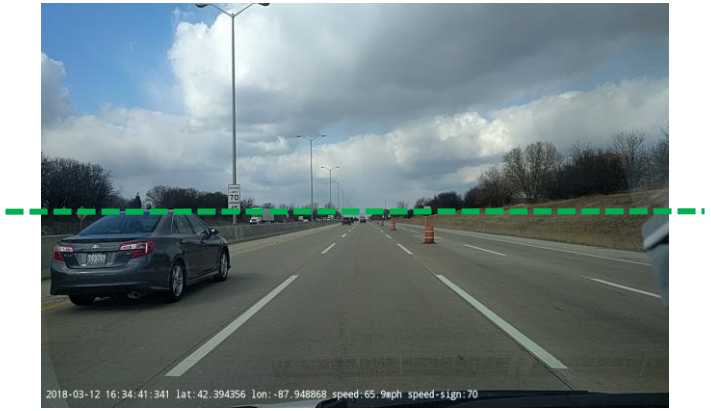

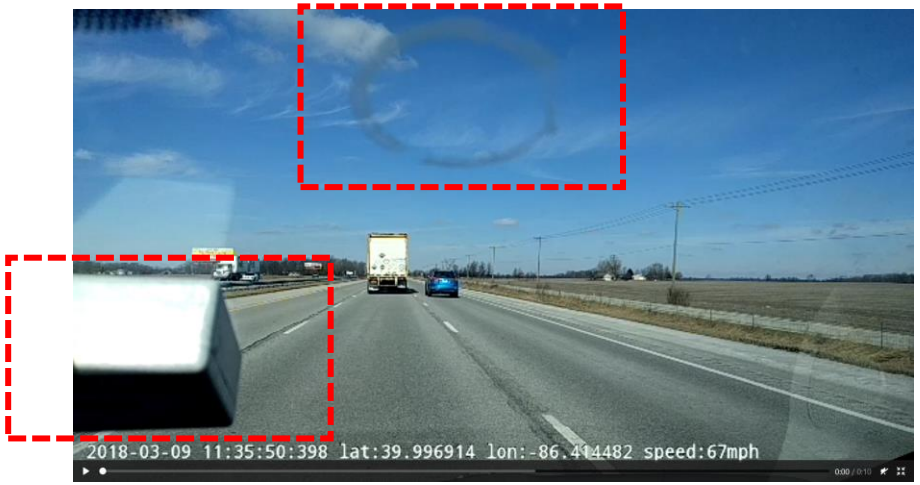

webfleet

Driver lens orientation

- The dash camera Cam Lite or Cam Pro inward lens, must be properly oriented with a complete view of the driver from the driver´s belly to his head.

- In case due to vehicle size and/or shape limitations, it's not possible to mount the dash camera in a proper way to cover the driver´s complete picture, consider installing and external DMS auxiliary camera.

- The driver´s face must be located within the third part of the frame in video/image and in the upper part, as it is represented in the picture. Consider moving the camera to the right/left if necessary or tilting it up/down as described in the following pages.

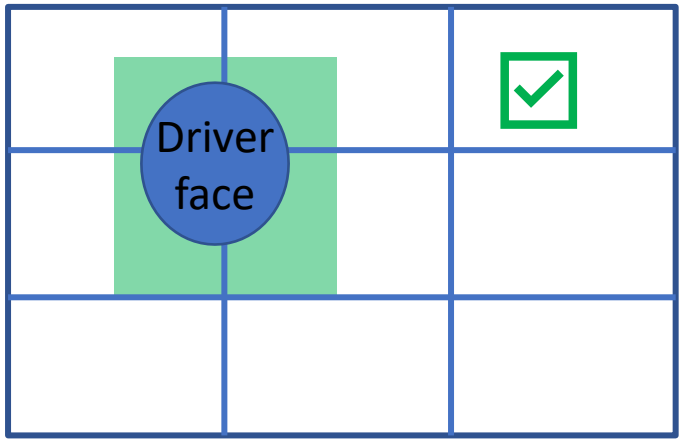

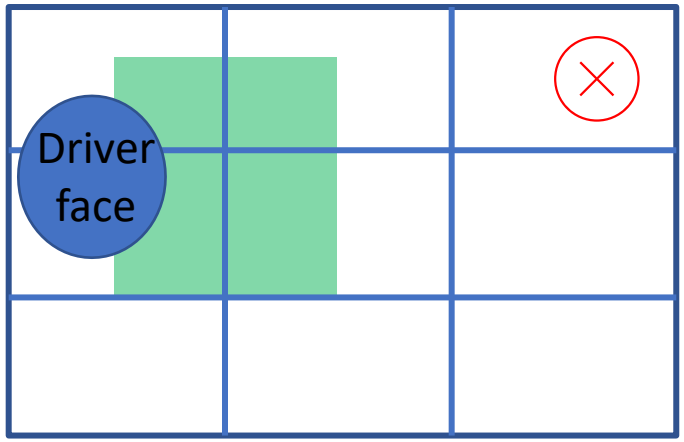

Camera orientation



- The Cam Lite features a lateral screw mechanism that, when loosened, allows for precise tilting of the device both upward and downward. Adjust the dash camera to the optimal position to ensure clear visibility of the road and the person driving.

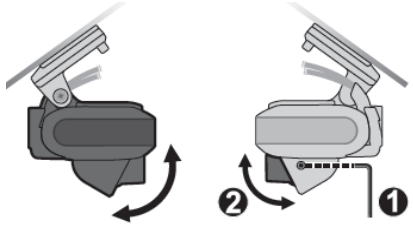

- The CAM Pro is equipped with two independent adjustment mechanisms for each lens—one for the road view and another for the driver view—providing enhanced flexibility and a broader range of applications across various vehicle types. The driver lens can be adjusted vertically using a dedicated screw, while a general screw allows simultaneous tilting of the entire camera, including the road lens.

- The AUX DMS Lite and Pro models are ideal solutions for situations where the lens movement range of the Cam Lite and/or Cam Pro is insufficient to adequately capture the driver’s view. The AUX DMS camera can be installed directly in front of the driver, either on the vehicle’s dashboard or windshield, and supports versatile mounting positions, including both upward and downward orientations. Once installed, the configuration must be completed using the 'Webfleet Installer App' to ensure proper functionality.

Camera anti-tampering cover

CAM Lite

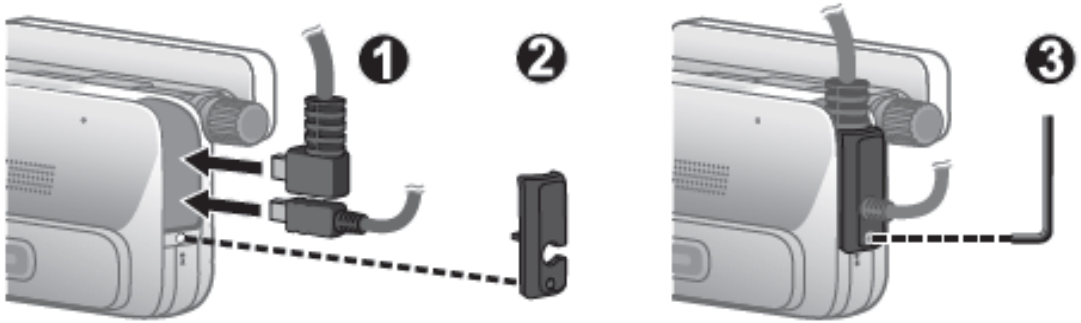

CAM Pro

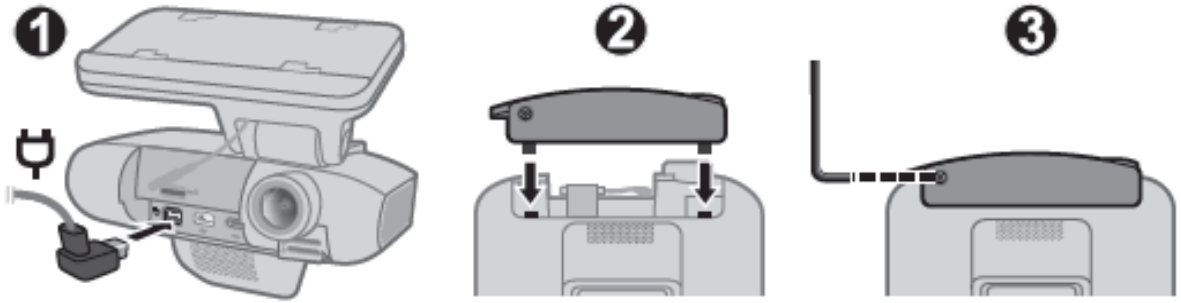

webfleet

CAM Lite /CAM Pro connections

- Black: connect to GND (vehcile´s chasis or negative signal wire)
- Yellow (cable with fuse box): connect to permanent power (12v to 24v)
- Red: ACC, ignition signal (12v to 24v)

**cables colours might change due to factory versión. However, the cables will always be labeled with the right description for proper connections*

webfleet

Accessories connections

- Auxiliary cameras and accessories are designed for seamless **plug-and-play** integration with the main dash camera. No direct power supply connections through exposed wires are required in any case.
- CAM Lite accessories are connected to the dash camera via USB.
- CAM Pro accessories are connected to the dash camera via TVI connector CAM Pro Cable 1to4 *4KVP.001.00.1*, not included in the CAM Pro box. Cables extensions are available for longer distances.

webfleet

AUX Lite DMS / AUX Pro DMS | Positioning

CAM Lite / CAM Pro activation – As a standalone solution

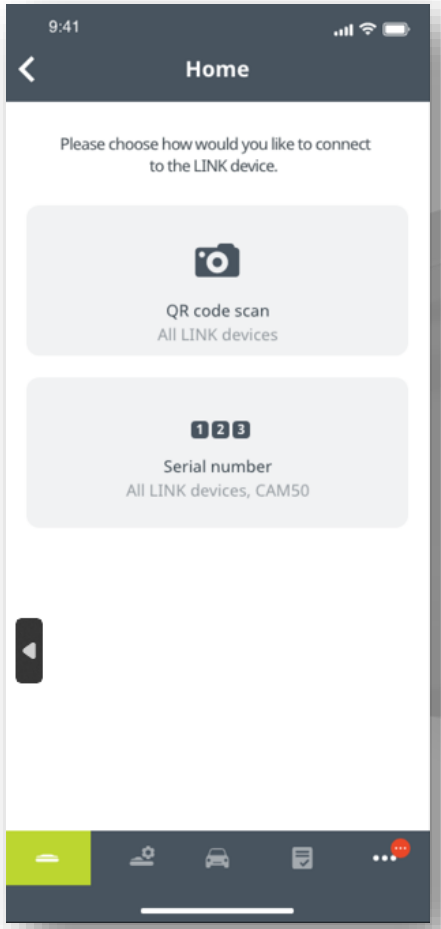

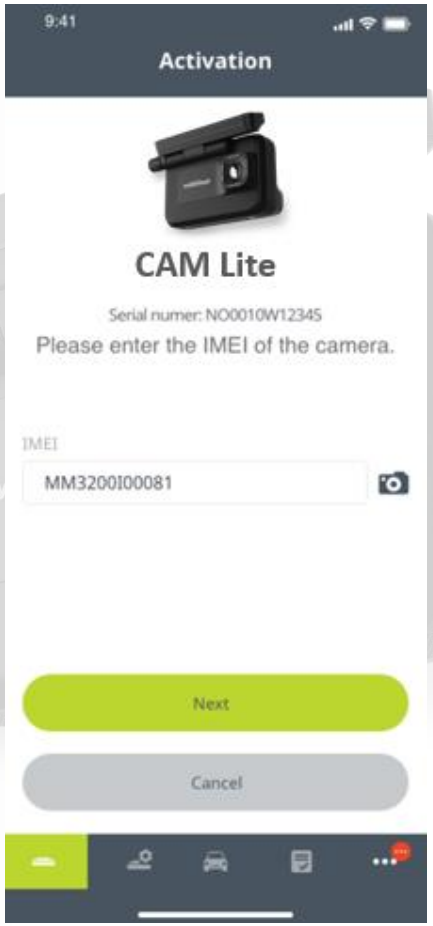

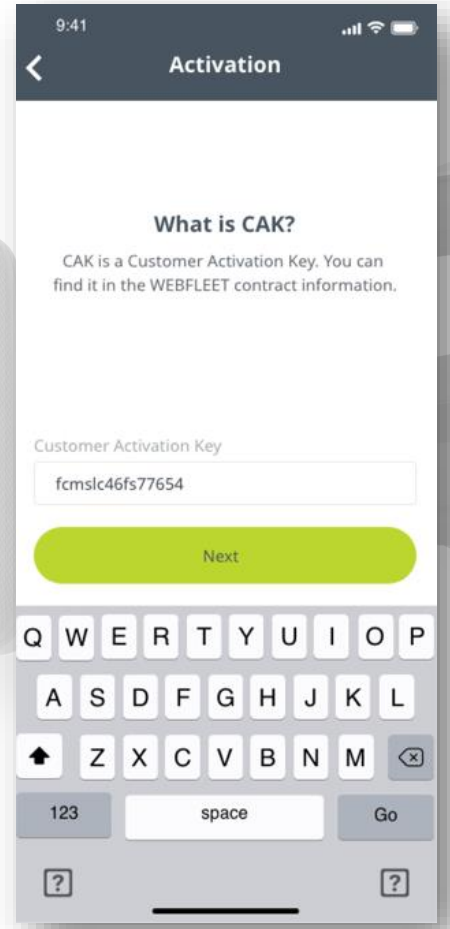

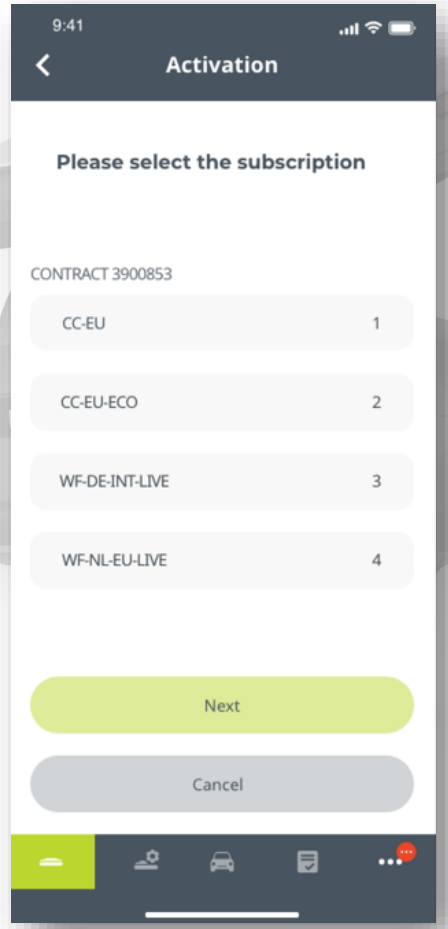

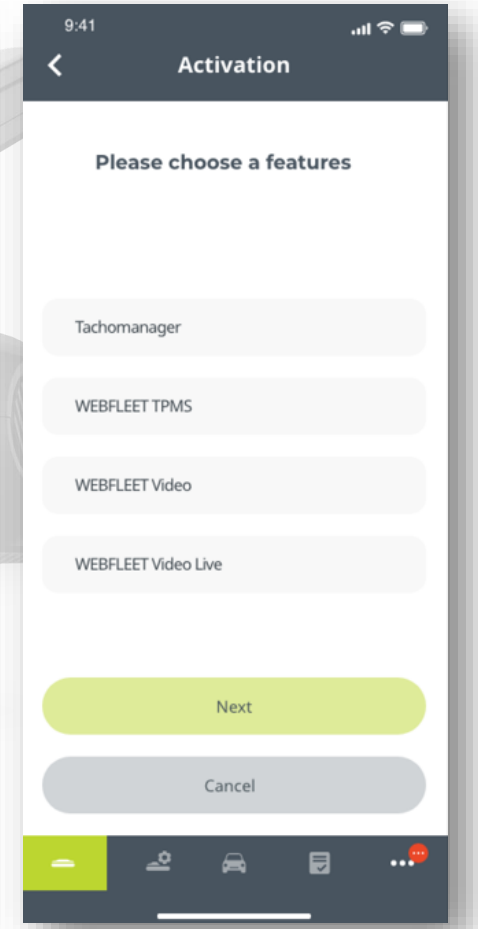

webfleet

CAM Lite / CAM Pro activation – As a standalone solution

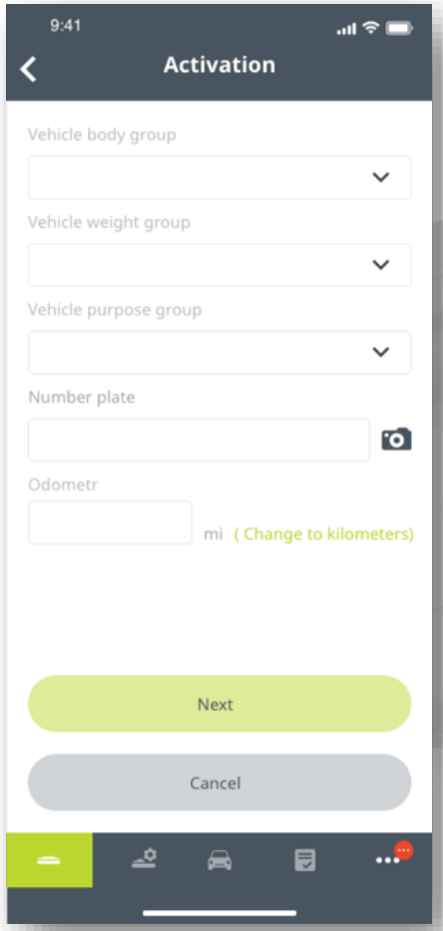

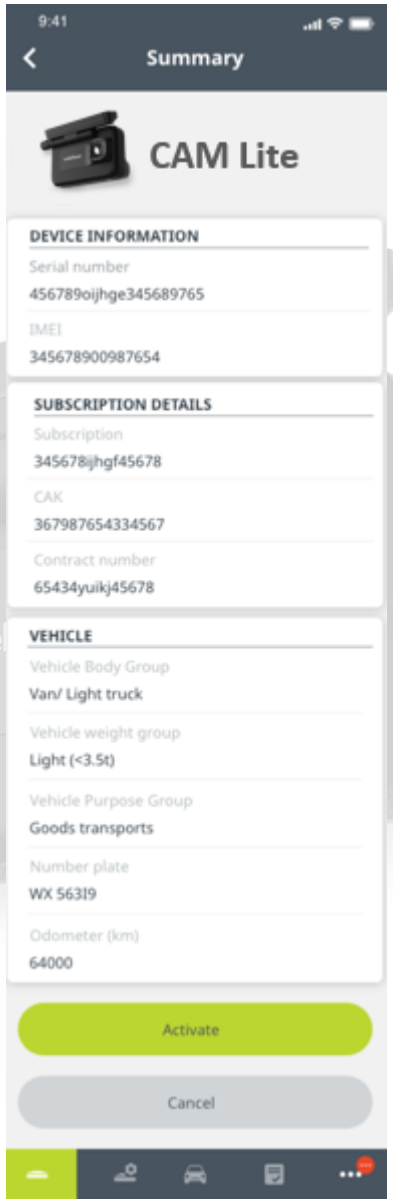

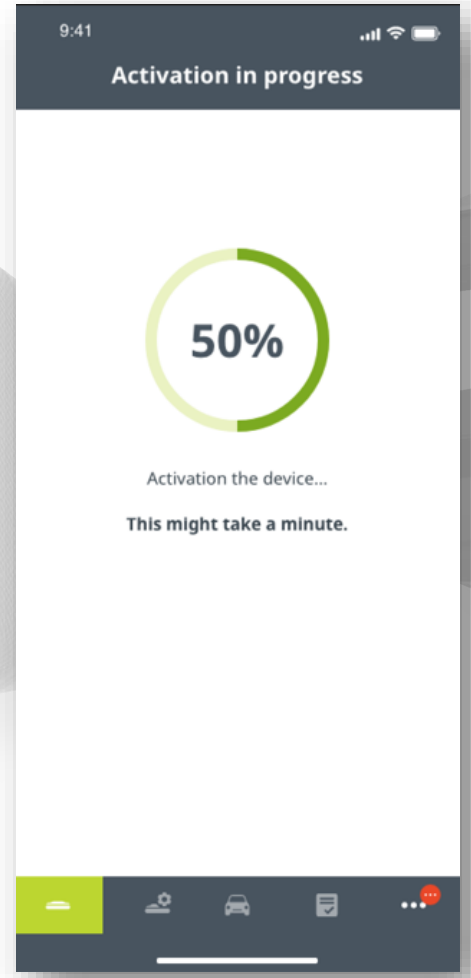

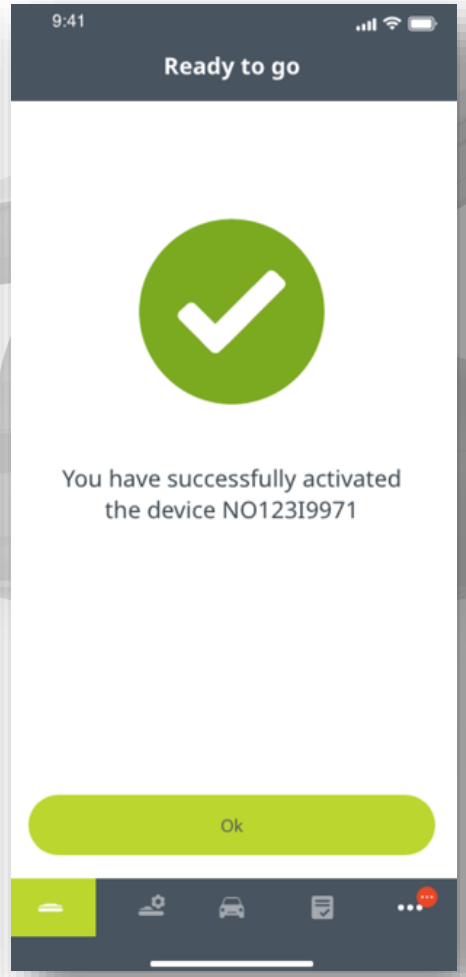

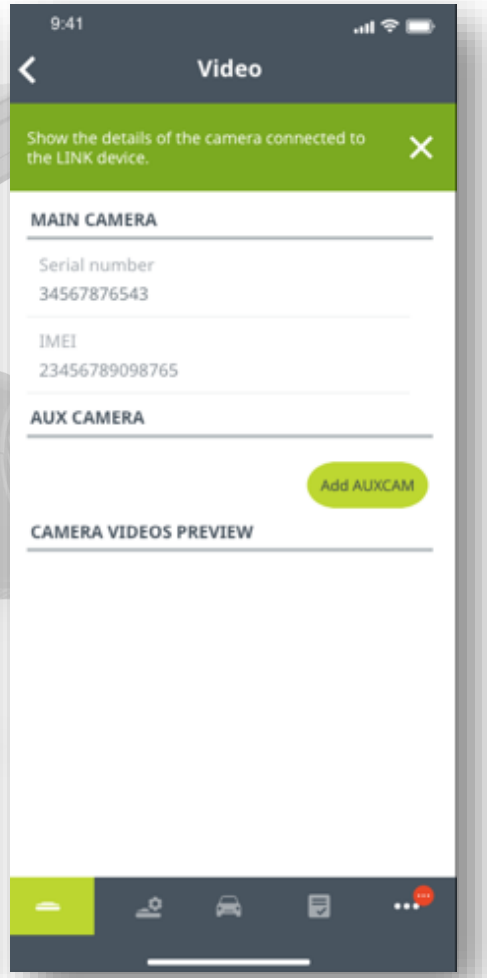

webfleet

CAM Lite / CAM Pro activation – As an accessory to a LINK device

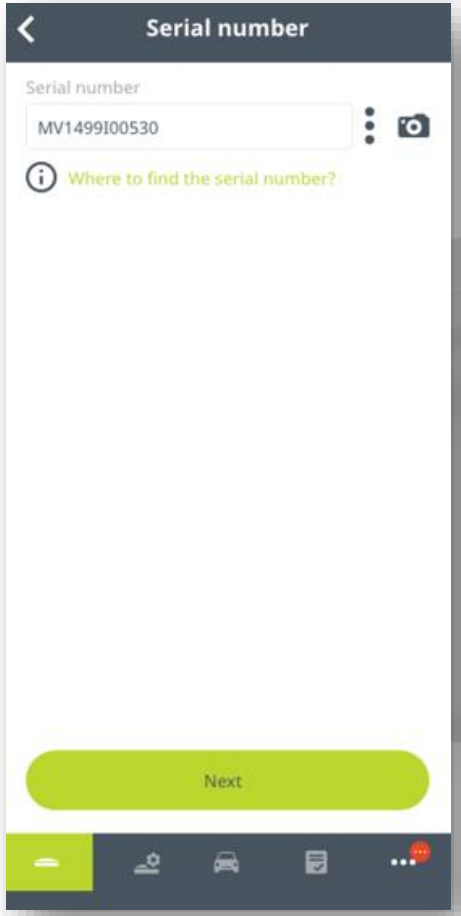

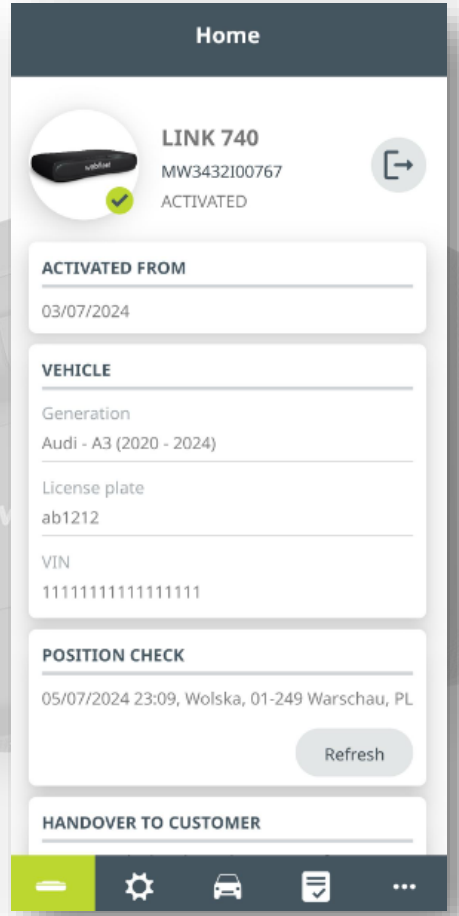

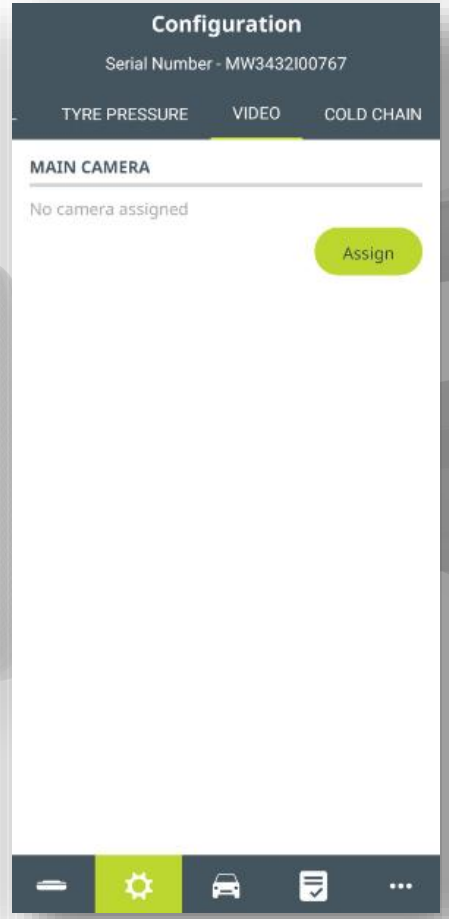

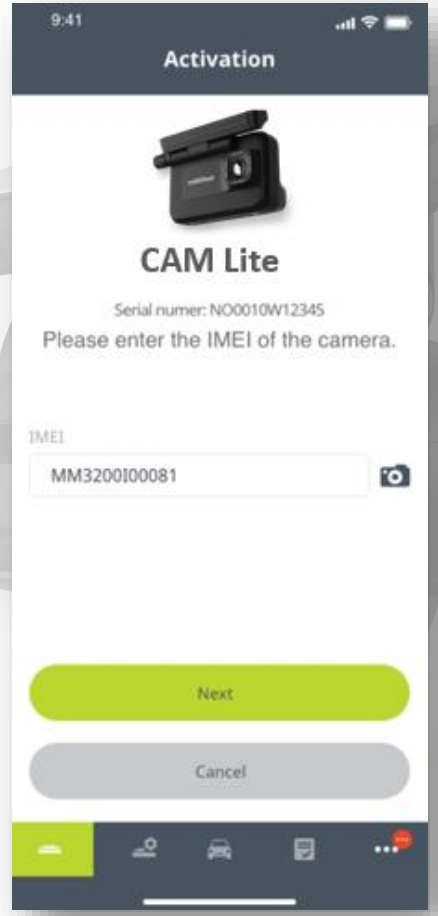

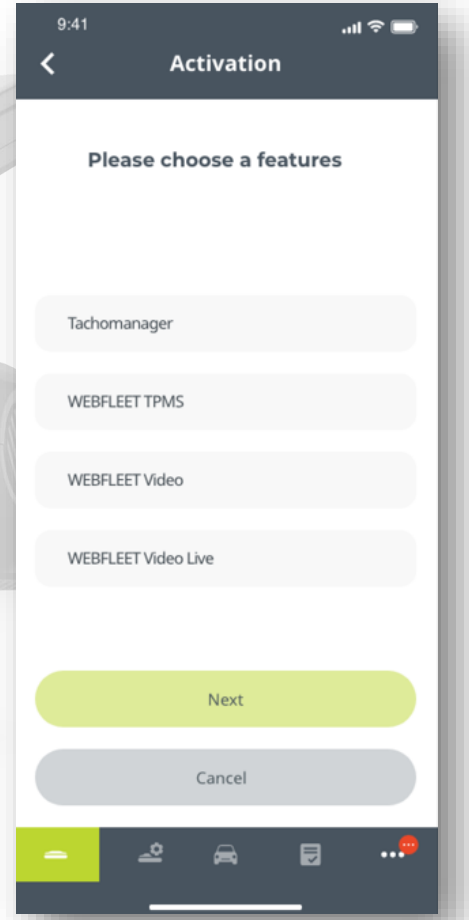

webfleet

CAM Lite / CAM Pro activation – As an accessory to a LINK device

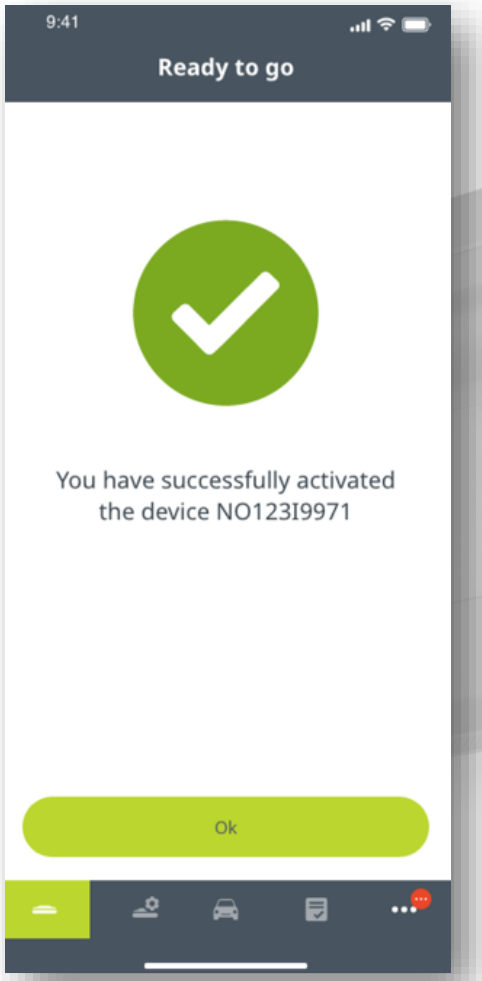

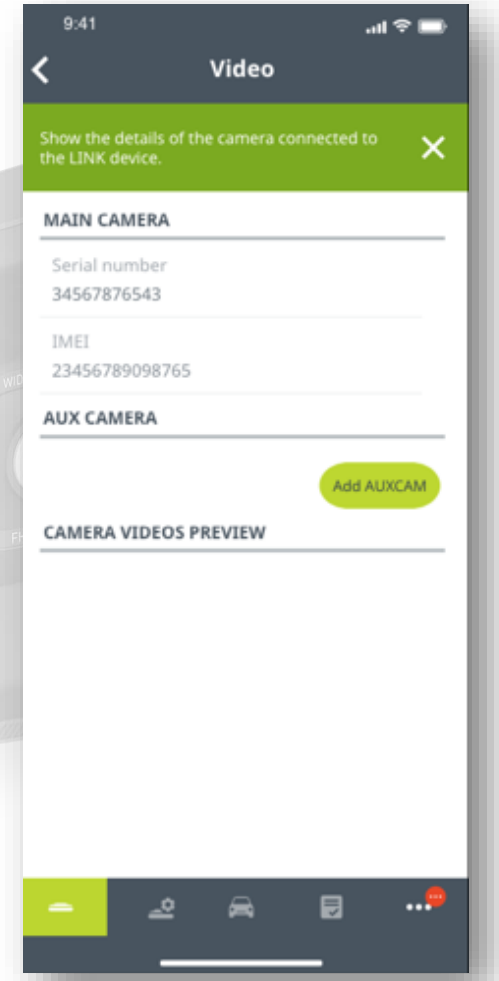

Check List

Every installation must follow a detailed list of instructions to be successful

- ❑ The customer – owner/fleet manager – has been properly informed about the options where the camera can be positioned and agreed accordingly.
- ❑ The driver has been properly informed about the options where the camera can be positioned and agreed accordingly.
- ❑ The customer understands the limitations when positioning a camera, related to type and size/shape of the vehicle, and informed about AI accuracy impact related to not ideal positioning scenarios.
- ❑ The driver has been informed about how the camera works. How to use the recording/panic button, when to expect AI detections and alerts. It was also explained the different intervals and thresholds for detections and event creation.
- ❑ The customer – owner/fleet manager – has received a training and Webfleet Video demo. He understands what to expect from the solution and how to configure the cameras (volume, language, video events on/off, video recording on/off, video requests, events status, data consumption, etc)
- ❑ The customer – owner/company – has been informed about GDPR/privacy terms related to Video technology.
- ❑ The driver/user has been informed about GDPR/privacy terms and the use of the data collected in the camera. Most common FAQs documents are available to share with the users for their information.

BRIDGESTONE

Solutions for your journey

Copyright © Bridgestone Corporation