webfleet

AUX 50

Installation Guide

1678624346077 - 1.2 - 2023-05-31

BRIDGESTONE
Solutions for your journey

Contents

Welcome **4**

Read me first **5**
Read the addendum and the safety notices 5
What's in the box **6**

Installation **7**

Connecting the AUX 50 to a power supply **8**
Pairing the AUX 50 camera to your CAM 50 ..... **9**
Mounting the AUX 50 ..... **11**
Adjusting the viewing angle **12**
Technical data **13**

Troubleshooting **14**

Rebooting or unpairing the AUX 50 ..... **15**

Addendum and Copyright **16**

Addendum **16**
Important Safety Notices and Warnings 17
CE mark and Radio Equipment Directive for AUX 50 17
Prohibited uses 18
Environmental information 19
Rating 19
FCC information for the user 19
Specific Absorption Rate (SAR) compliance 21
Triman logo 21
WEEE – e-waste disposal 21
How Webfleet uses your information 22
Exposure limits 22
Technical Specifications 22
Model numbers 23
Responsible party in North America 23
Responsible party in Chile 23
Responsible party in Mexico 23
Emissions information for Canada 23
Mexico 24
Chile 24
Warning for Australia 25
Notice for New Zealand 25
Notice for South Africa 25
Customer support contact 25
Certification for Australia 25
Customer support contact (Australia and New Zealand) 25
This document 25
Accessories **26**
Accessories supplied with this device 26
Accessories not supplied with this device 26
Copyright notices **26**
N-Mark 26
SD-3C 26
Wi-Fi Alliance 27
Terms and conditions and Limited warranty **27**

Webfleet Limited Warranty.....28

Welcome

Read me first

Read the addendum and the safety notices

IMPORTANT: To avoid any malfunction or damage, carefully read these instructions before turning on and using this device. Keep this document for future reference.

What's in the box

- AUX 50 - WiFi auxiliary universal camera.
- Power cable.
- Universal camera mount.

Installation

Connecting the AUX 50 to a power supply

Connect the auxiliary camera to 12V or 24V ignition power using the attached power cables via a fuse.

Alternatively:

- Each auxiliary camera must be fused at the connection point at 2 amps.
- The red wire is connected to a vehicle ignition circuit.
- The black wire is connected to the vehicle ground/chassis.

Pairing the AUX 50 camera to your CAM 50

Once you've connected the AUX 50 to a power source, pair it with the vehicle's CAM 50. Pairing the AUX 50 to the CAM 50 enables the CAM 50 to pull recordings from the AUX 50 and upload them to Webfleet.

Please make sure to check the following prerequisites:

- The AUX 50 is connected to a power supply.
- Use any device that connects to WiFi, such as a phone or tablet, to check that the camera can find the available WiFi networks (it appears as AuxCamera_XXXXXX).

Follow the steps below to pair the AUX 50 to the CAM 50 in your vehicle:

1. When you are in the parked vehicle with the parking brake on, the ignition on, and the door closed, press the touchscreen of the CAM 50 to view the PIN screen.
2. Enter the default PIN 3333 to unlock the CAM 50 for the first time, or your admin PIN subsequently.



The screen unlocks and the menu appears:

3. Press **Settings**.



4. Scroll down and press **WiFi**.
5. Toggle the button to turn on the **Mobile Hotspot**.



6. Return to the **Settings** menu.
7. Scroll down and press **Add Cameras**.



The CAM 50 searches for the available, unpaired AUX 50. This can take up to a minute.



8. A snapshot from the AUX 50 appears on the screen. Please check whether this is indeed the expected feed from the AUX 50, if so, press YES.

Note: If it is not the auxiliary camera you want to pair with, press NO. The dashcam continues to search for available, unpaired cameras.

The auxiliary camera is paired to the dashcam. This can take up to a minute.



9. Press **DONE**.



You are taken back to the **Settings** screen.

10. To confirm that the AUX 50 paired successfully, scroll down, and press **More Info**.



From this screen, you can see the AUX 50 that is connected to your CAM 50.



Mounting the AUX 50

To mount the AUX 50, screw the mounting bracket attached to the camera into the vehicle structure at the desired location. Be aware that the weight of the camera will damage the skin panels on the door.

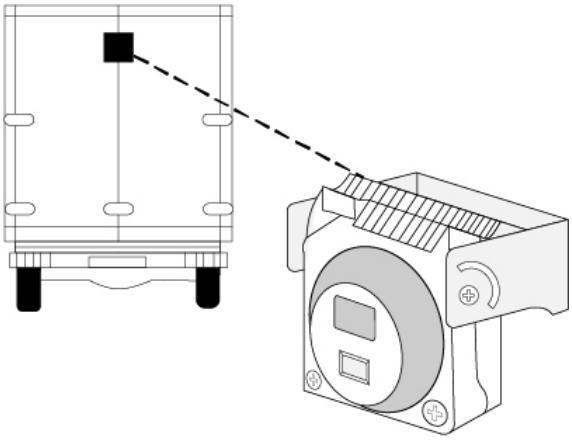

Note: Please make sure there is some slack in the power cable to allow for further adjustment.

IMPORTANT: The Universal mount supplied with the AUX 50 is different than the one supplied with the CAM 50. These can not be used interchangeably.

Adjusting the viewing angle

Once you've connected the auxiliary camera to a power source, paired it to the dashcam, and mounted it, you can adjust the viewing angles. The AUX 50 provides live view and recording of an additional perspective during trips.

To make sure the AUX 50 provides the required view it may be necessary to adjust the viewing angle of the camera. To do so please follow these steps:

1. Loosen the screws on each side of the mounting bracket, using a Phillips screwdriver.



2. Loosen the screws on each side of the lens at the bottom of the camera, using a Phillips screwdriver.



3. Adjust the lens.
4. Check the viewing angle of the lens through the CAM 50 recordings.
5. Tighten the screws.

Technical data

Position	**Rear mount**
Wi-Fi	Connects to the dashcam with Wi-Fi 802.11 b/g/n
Micro-SD	Built-in 64 GB micro-SD card
Lens	3.3 mm with day and night functionality
Supported resolution	Up to 1080p, 30 frames per second
Streaming and recording	720p, 30 frames per second
Field of view	Horizontal: 106° Vertical: 55.8° Diagonal: 126° Manual angle adjustment
Night view distance	9.14 m (30 ft)
Waterproof and dust-proof	IP69K
Power	12 or 24V DC
Power consumption	200 mA at 12V
Reset button	Included
Operating environment	Temperature with infrared on: -20° to 40° C- (4° to 104° F) Temperature with infrared off: -20° to 60° C (-4° to 140° F) Humidity: 20% to 55%, non-condensing
Dimensions	8.9 x 3.9 x 8.9 cm (3.5 x 1.5 x 3.5 in)
Weight	449 grams (.99 lb)

Troubleshooting

Rebooting or unpairing the AUX 50

Rebooting the AUX 50

In case the AUX 50 is not working as expected or shows problems with recording or live video not working please reboot the device. To this end the AUX 50 has a reboot button located on the side of the lens ball.

To perform a reboot please follow these steps:

1. Loosen the two screws at the bottom of the camera.



2. Move the lens ball around until you find the reboot button.

3. Hold the reboot button for 3 seconds to reboot the AUX 50. Rebooting the camera turns it off and then back on.

Unpairing the AUX 50

To unpair the AUX 50 from the CAM 50 it is currently paired to please follow the above steps 1 and 2. When you have found the reboot button press and hold the button for 10 seconds to reboot and unpair the AUX 50.

Addendum and Copyright

Addendum

Important Safety Notices and Warnings

Important! Read before use!

Death or serious injury could result from failure or partial failure to follow these warnings and instructions. Failure to properly set up, use, and care for this device can increase the risk of serious injury or death, or damage to the device.

Use with care warning

It is your responsibility to use best judgment, due care and attention when using this device. Don't allow interaction with this device to distract you while driving. Minimise the time spent looking at the device screen while driving. You are responsible for observing laws that limit or prohibit the use of mobile phones other electronic devices, for example, the requirement to use hands-free options for making calls when driving. Webfleet Solutions does not guarantee the error-free operation of this device and shall not be liable for any penalties arising from your failure to comply with applicable laws and regulations.

Proper mounting

Do not mount the device in a way that may obstruct your view of the road or your ability to control the vehicle, fitting behind the rear-view mirror as much as possible is generally considered acceptable. Do not place the device in an area that may obstruct the deployment of an airbag or of any other safety feature of your vehicle.

Pacemakers

Pacemaker manufacturers recommend that a minimum of 15cm / 6 inches be maintained between a handheld wireless device and a pacemaker to avoid potential interference with the pacemaker. These recommendations are consistent with independent research and recommendations by Wireless Technology Research.

Guidelines for people with pacemakers:

- You should ALWAYS keep the device more than 15 cm / 6 inches from your pacemaker.
- You should not carry the device in a breast pocket.

Other medical devices

Please consult your physician or the manufacturer of the medical device, to determine if the operation of your wireless product may interfere with the medical device.

Device care

- It is important to take care of your device:
- Do not open the casing of your device under any circumstances. Doing so may be dangerous and will invalidate the warranty.
- Wipe or dry the screen of your device using a soft cloth. Do not use any liquid cleaners.

CE mark and Radio Equipment Directive for AUX 50

CE

The frequency bands in which this device operates are

- LTE bands:1 (2100 MHz), 2 (1900 MHz), 3 (1800 MHz), 4 (1700 MHz), 7 (2600 MHz), 12 (700 MHz), 20 (800 MHz)
- WLAN: 2.4 GHz, 5 GHz

and the maximum radio frequency emission power within these bands is:

- LTE: 23 dBm
- WLAN: 20 dBm

Hereby, Webfleet Solutions declares that the radio equipment type tablet is in compliance with Directive 2014/53/EU. The full text of the EU declaration of conformity is available at the following internet address: www.webfleet.com/webfleet/legal/doc/

Requirements in AT/BE/BG/CZ/DK/EE/FR/DE/IS/IE/IT/EL/ES/CY/LV/LI/LT/LU/HU/MT/NL/NO/PL/PT/RO/SI/SK/TR/FI/SE/CH/UK/HR. 5150MHz~5350MHz is for indoor use only.

Prohibited uses

Aircraft, hospitals and military installations

Use of devices with an antenna is prohibited on most aircraft, in many hospitals and in many other locations. This device must not be used in these environments.

In most countries there are restrictions relating to filming certain military, defence security and intelligence installations.

Webfleet Solutions bears no responsibility for and hereby disclaims all liability for any fines, penalties or damage incurred by a driver for violations of the applicable laws.

Special Note Regarding Driving in California, Minnesota and Other States

California Vehicle Code Section 26708 which applies to those driving within the State of California restricts the mounting of a navigation device on the windshield to a seven-inch square in the lower corner of the windshield farthest removed from the driver or in a five-inch square in the lower corner of the windshield nearest to the driver and outside of an airbag deployment zone, if the system is used only for door-to-door navigation while the motor vehicle is being operated. Drivers in California should not mount the device on their side or rear windows.

California Vehicle Code Section 26708 paragraph 13 subparagraph A further provides that video event recorder with the capability of monitoring driver performance to improve driver safety, may be mounted in a seven-inch square in the lower corner of the windshield farthest removed from the driver, in a five-inch square in the lower corner of the windshield nearest to the driver and outside of an airbag deployment zone, or in a five-inch square mounted to the centre uppermost portion of the interior of the windshield. California Vehicle Code Section 26708 paragraph 13 subparagraph B stipulates that a vehicle equipped with a video event recorder shall have a notice posted in a visible location which states that a passenger's conversation may be recorded.

Minnesota State Legislature Statutes Section 169.71, subdivision 1, section 2 restricts any person driving within the State of Minnesota from driving with a device suspended between the driver and the windshield.

Many other states have enacted laws which restrict the placement of any object or material on the windshield, side or rear window that obstructs a driver's clear view of the road. It is incumbent upon the driver to be aware of all applicable laws and to place the device in such a manner that will not interfere with his/her driving.

Webfleet Solutions bears no responsibility for and hereby disclaims all liability for any fines, penalties or damage incurred by a driver for violations of the federal law, state and local laws and regulations. While driving in any state with windshield mounting restrictions,

Webfleet Solutions recommends using the supplied Adhesive Mounting Disk or purchasing an alternative mounting system (e.g. dashboard or air vents).

Environmental information

Your device

Do not disassemble, crush, bend, deform, puncture, or shred your device.

Do not use it in a humid, wet and/or corrosive environment. Your device (excluding accessories) is protected against splashes and dust. When tested under controlled laboratory conditions, the device is compliant with the IP54 rating of the corresponding IEC standard. Immersion in water or water-pressure such as washing the device with running water may cause damage to the device and voids warranty. Normal wear might decrease resistance. The device must not be operated in water.

Do not put, store or leave the device in a high temperature location, in direct sunlight, in or near a heat source, in a microwave oven or in a pressurised container, and do not expose it to temperatures over 70°C/158°F and below -20°C/-4°F.

Avoid dropping the device. If the device is dropped and you suspect damage, please contact customer support. Use the device only with the chargers, mounts or USB cables provided. For Webfleet Solutions-approved replacements, go to www.webfleet.com.

Operating temperature

This device will remain fully operational when used and stored within the temperature range:

Operation: 0 °C to 70 °C / 32 °F to 158 °F

Storage: -10 °C to 85 °C / 14 °F to 185 °F

Prolonged exposure to higher or lower temperatures can cause damage to your device and is therefore advised against.

Important: Before you switch on the device, let the device acclimatise to the standard operation temperature range for at least 1 hour. Do not use the device outside of this temperature range.

Rating

5V ⎓ 2.0A

FCC information for the user

THE DEVICE COMPLIES WITH PART 15 OF THE FCC RULES

Federal Communications Commission (FCC) Statement

This equipment radiates radio frequency energy and if not used properly - that is, in strict accordance with the instructions in this manual - may cause interference to radio communications and television reception.

Operation is subject to the following two conditions: (1) this device may not cause harmful interference and (2) this device must accept any interference, including interference that may cause undesired operation of the device.

This device has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

Important

This equipment was tested for FCC compliance under conditions that included the use of shielded cables and connectors between it and the peripherals. It is important that you use shielded cable and connectors to reduce the possibility of causing radio and television interference. Shielded cables, suitable for the product range, can be obtained from an authorized dealer. If the user modifies the equipment or its peripherals in any way, and these modifications are not approved by Webfleet, the FCC may withdraw the user's right to operate the equipment. For customers in the USA, the following booklet prepared by the Federal Communications Commission may be of help: "How to Identify and Resolve Radio-TV Interference Problems". This booklet is available from the US Government Printing Office, Washington, DC 20402. Stock No 004-000-00345-4.

FCC ID:

IC ID:

FCC RF Radiation Exposure Statement

The transmitters within this device must not be co-located or operating in conjunction with any other antenna or transmitter.

Déclaration d'exposition aux rayonnements à fréquence radio définie par la FCC

Les émetteurs contenus dans cet appareil ne doivent pas être placés à proximité d'un autre émetteur ou d'une autre antenne, ou manipulés simultanément avec ces derniers.

FCC Country Code Selection

The Country Code Selection feature is disabled for products marketed in the US or Canada. Per FCC regulations, all Wi-Fi products marketed in US must be fixed to US operation channels only.

Location of FCC ID and IC ID information on your device

The FCC ID and IC ID can be found within the settings menu of the device.

Specific Absorption Rate (SAR) compliance

THIS WIRELESS DEVICE MODEL MEETS GOVERNMENT REQUIREMENTS FOR EXPOSURE TO RADIO WAVES WHEN USED AS DIRECTED IN THIS SECTION

This device is a radio transmitter and receiver. It is designed and manufactured not to exceed the emission limits for exposure to radio frequency (RF) energy set by the Council of the European Union, Innovation Science and Economic Development Canada (ISED) and the Federal Communications Commission of the U.S. Government. These limits are part of comprehensive guidelines and establish permitted levels of RF energy for the general population.

The SAR limit set by the FCC/ISED is 1.6W/kg averaged over 1 gram of tissue for the body (4.0 W/kg averaged over 10 grams of tissue for the extremities - hands, wrists, ankles and feet). The SAR limit recommended by The Council of the European Union is 2.0W/kg averaged over 10 grams of tissue for the body (4.0 W/kg averaged over 10 grams of tissue for the extremities - hands, wrists, ankles and feet). Tests for SAR are conducted using standard operating positions specified by the FCC/ISED/EU council with the device transmitting at its highest certified power level in all tested frequency bands.

Before a wireless device model is available for sale to the public, it must be tested and certified to the FCC, ISED, and The Council of the European Union that it does not exceed the limit established by the government-adopted requirement for safe exposure under the recommendations of the International Commission on Non-Ionizing Radiation Protection (ICNIRP). The tests are performed in positions and locations as required by the FCC, ISED, and The Council of the European Union for each model.

To maintain compliance with FCC, ISED, and EU RF exposure guidelines, when you carry a Webfleet device with an integrated mobile data module keep the device at least 20cm (8 inches) from your body when the device is transmitting. If you use an accessory not supplied by Webfleet when you carry the device, verify that the accessory does not contain metal and keep the device at least 20cm (8 inches) from your body when the device is transmitting.

Triman logo

WEEE – e-waste disposal

In the EU/EEA, this product is marked with the crossed out wheeled bin symbol on its body and/or packaging as required by Directive 2012/19/EU (WEEE). This product shall not be treated as household waste or be disposed of as unsorted municipal waste. You can dispose of this product by returning it to the point of sale or bringing it to your local municipal collection point for recycling.

Outside of the EU/EEA, the crossed out wheeled bin symbol may not have the same meaning. More information about national recycling options can be requested from a responsible local authority. It is the responsibility of the end user to comply with local law when disposing of this product.

How Webfleet uses your information

Information regarding the use of personal information can be found at: www.webfleet.com/privacy

Webfleet

If your vehicle is configured to connect to Webfleet services, it will collect information for the purposes of the Webfleet service while the vehicle is in use in association with other Webfleet equipment installed in the vehicle.

The following information is continuously collected: vehicle location, g-force/acceleration data, and engine-related data such as fuel consumption, valve positions, engine speed, and odometer value. In addition, by using the AUX 50, Webfleet collects video images – both inward and outward facing. What information is collected specifically depends on the Webfleet equipment installed in the vehicle.

The owner of the Webfleet contract decides what purposes this information is subsequently used for, who will have access to it, and for how long the information is kept. Please refer to the owner of the Webfleet contract for any additional information. This will usually be the owner or lessee of the vehicle.

AUX 50

If your vehicle is outfitted with the AUX 50 device please note this device collects data, including the recording of video footage and processes this on the SD card in the device which subsequently may be uploaded to our Webfleet platform. Video footage contains personal data, we recommend you take notice of the specific privacy considerations listed on our website https://www.webfleet.com

Exposure limits

This device complies with radiation exposure limits set forth for an uncontrolled environment. In order to avoid the possibility of exceeding the radio frequency exposure limits, human proximity to the antenna shall not be less than 20 cm (8 inches) during normal operation.

Technical Specifications

Supply voltage

12V/24V

Maximum power consumption

Active-Active: 12V ~ 195mA

Active-Standby: 12V ~ 32mA

Frequencies

GPS: 1575 MHz

Wireless LAN: 2.4 GHz, 5 GHz

Mobile networks

Devices that contain a mobile network module are intended for connection to one or more of the following mobile network frequencies:

- LTE bands:1 (2100 MHz), 2 (1900 MHz), 3 (1800 MHz), 4 (1700 MHz), 7 (2600 MHz), 12 (700 MHz), 20 (800 MHz)
- WLAN: 2.4 GHz, 5 GHz

Product dimensions and weight

- Length: 118mm/4.70inch
- Width: 50mm/1.96inch
- Depth: 61.5mm/2.42inch
- Weight: 150g/5.29oz

Model numbers

Responsible party in North America

TT Telematics USA Inc., 100 Summit Drive, Burlington, MA

Responsible party in Chile

Webfleet Solutions Chile SpA , Apoquindo 3910, Piso 8, Edificio Las Torcazas, Las Condes, 7550029 Santiago, Chile

Responsible party in Mexico

Webfleet Solutions Mexico S.A de C.V., Torre Diana, Calle Río Lerma 232, Cuauhtémoc, 06500 Ciudad de México, CDMX.

IMPORTED AND MARKETED BY:

Webfleet Solutions Mexico S.A de C.V., Torre Diana, Calle Río Lerma 232, Cuauhtémoc, 06500 Ciudad de México, CDMX.

Emissions information for Canada

This device contains licence-exempt transmitter(s)/receiver(s) that comply with Innovation, Science and Economic Development Canada's licence-exempt RSS(s). Operation is subject to the following two conditions:

- This device may not cause interference.
- This device must accept any interference, including interference that may cause undesired operation of the device.

Operation is subject to the condition that this device does not cause harmful interference.

This Class B digital apparatus complies with Canadian ICES-003. CAN ICES-3(B)/NMB-3(B)

The Country Code Selection feature is disabled for products marketed in the US or Canada.

Equipment is certified to the requirements of RSS-247 for 2.4-GHz and 5.0-GHz.

Wi-Fi 5GHz band caution in Canada

- The device for operation in the band 5150-5350 MHz is only for indoor use to reduce the potential for harmful interference to co-channel mobile satellite system.

  ISED Radiation Exposure Statement:

  - This equipment complies with ISED RSS-102 radiation exposure limits set forth for an uncontrolled environment.
  - This device and its antenna(s) must not be co-located or operating in conjunction with any other antenna or transmitter.

  End users must follow the specific operating instructions for satisfying RF exposure compliance. To maintain with ISED RF exposure compliance requirements please follow operation instruction as documented in this manual.
- This equipment complies with IC radiation exposure limits set forth for an uncontrolled environment. End users must follow the specific operating instructions for satisfying RF exposure compliance. To maintain with IC RF exposure compliance requirements please follow operation instruction as documented in this manual.

ISED RSS-Gen Notice (in French)

L'émetteur/récepteur exempt de licence contenu dans le présent appareil est conforme aux CNR d'Innovation, Sciences et Développement économique Canada applicables aux appareils radio exempts de licence. L'exploitation est autorisée aux deux conditions suivantes :

- L'appareil ne doit pas produire de brouillage;
- L'appareil doit accepter tout brouillage radioélectrique subi, même si le brouillage est susceptible d'en compromettre le fonctionnement.

Mexico

IFT:

Operation of this equipment is subject to the following two conditions: (1) this equipment or device may not cause harmful interference and (2) this equipment or device must accept all interference, including interference that may cause undesired operation.

Chile

This product has been verified by SUBSECRETARÍA DE TELECOMUNICACIONES with homologation number

Warning for Australia

The user needs to switch off the device when exposed to areas with potentially explosive atmospheres such as petrol stations, chemical storage depots and blasting operations.

Notice for New Zealand

This product displays R-NZ to show it complies with relevant New Zealand regulations.

Supplier identification:

Notice for South Africa

This product displays the ICASA logo to show it complies with all relevant South African radio equipment certifications.

ICASA_#

ICASA

APPROVED

Customer support contact

US: 1-866-459-3499

Chile: (+56) 2 2584 7172

Mexico: (+ 52) 5559559224 / (+52) 5559559225

Certification for Australia

This product displays the Regulatory Compliance Mark (RCM) to show that it complies with relevant Australian regulations.

Customer support contact (Australia and New Zealand)

Australia: 02 8023 8554

New Zealand: 09915 0241

This document

Great care was taken in preparing this document. Constant product development may mean that some information is not entirely up to date. The information is subject to change without notice. Webfleet shall not be liable for technical or editorial errors or omissions contained herein, nor for incidental or consequential damages resulting from the performance or use of this document. This document may not be copied without the prior written consent from Bridgestone Mobility Solutions B.V.

Accessories

Accessories supplied with this device

- Power cable
- Universal mount

Accessories not supplied with this device

- Phillips screwdriver
- Screws, for attaching the mounting bracket to the vehicle
- We also recommend that you protect any cables outside of the vehicle using adhesive lined heat shrink

Copyright notices

© 2023 Bridgestone Mobility Solutions B.V. All rights reserved. Webfleet is a registered trademark of Bridgestone Mobility Solutions B.V. or one of its Affiliates.

Open Source Software

The software included in this product contains copyrighted software that is licensed under the GPL. A copy of that licence can be viewed in the Licence section. You can obtain the complete corresponding source code from us for a period of three years after our last shipment of this product. For more information, contact your local Webfleet customer support team at webfleet.com/support. Upon request, we will send you a CD with the corresponding source code.

N-Mark

The N-Mark is a trademark or registered trademark of NFC Forum, Inc. in the United States and in other countries.

SD-3C

The microSDHC logo, microSDXC logo, microSD logo, microSDHC, microSDXC and microSD are trademarks of SD-3C, LLC.

Wi-Fi Alliance

Wi-Fi®

Wi-Fi® is a registered trademark of Wi-Fi Alliance.

Terms and conditions and Limited warranty

Our terms and conditions including our limited warranty apply to this product; visit https://www.webfleet.com/legal

Webfleet Limited Warranty

WARRANTOR

Non-U.S. and non-Canadian purchases: If you have made your purchase outside the United States and Canada, this Limited Warranty is granted by and this Limitation of Liability is stipulated for the benefit of Bridgestone Mobility Solutions B.V., Beethovenstraat 503, 1083 HK, The Netherlands.

WHAT THIS WARRANTY COVERS

1 Bridgestone Mobility Solutions B.V. ("Webfleet") warrants to you that the Hardware will be free from defects in workmanship and materials under normal use ("Defects") for a period of one (1) year from the date that the Hardware was first purchased by you ("Warranty Period"). During the Warranty Period the Hardware will be repaired or replaced at Webfeet's choice ("Limited Warranty") without charge to you for either parts or labour. This Limited Warranty covers the replacement of the Hardware only. If the Hardware is repaired after the Warranty Period has expired, the Warranty Period for the repair will expire six (6) months after the date of repair.

WHAT THIS WARRANTY DOES NOT COVER

2 The Limited Warranty does not apply to normal wear and tear, does not apply when the Hardware is opened or repaired by someone not authorized by Webfleet and does not cover repair or replacement of any Hardware or part thereof damaged by: misuse, moisture, liquids, proximity or exposure to heat and accident, abuse, non-compliance with the instructions supplied with the Hardware, neglect or misapplication. The Limited Warranty does not cover physical damage to the surface of the Hardware. This Limited Warranty does not cover any software that may accompany or be installed on the Hardware. The Limited Warranty does not cover the installation, removal or maintenance of the Hardware or any costs related herewith.

HOW TO MAKE A WARRANTY CLAIM

3 In order to make a claim of a Defect, you must contact Webfleet during the Warranty Period via www.webfleet.com to explain the Defect and to obtain an RMA number (Return Materials Authorization) if necessary. You must return the Hardware during the Warranty Period, along with the RMA number provided by Webfleet and an explanation of the Defect, to the address provided to you by Webfleet. If a defect arises and a valid claim under this Limited Warranty is received by Webfleetafter the first one hundred and eighty (180) days of the Warranty Period, Webfleet is entitled to charge you for any reasonable shipping and handling costs made in connection with the repair or replacement of the Hardware. You must comply with any other return procedures stipulated by Webfleet, if any.

YOUR LEGAL RIGHTS

4 Some countries may not allow the exclusion or limitation of damages. If any part of this Limited Warranty is held to be invalid or unenforceable, the remainder of the Limited Warranty shall nonetheless remain in full force and effect.

5 This Limited Warranty is the only express warranty made to you and is provided in lieu of any other express warranties or similar obligations (if any) created by any advertising, documentation, packaging, or other communications.

6 Except for the Limited Warranty and to the maximum extent permitted by applicable law, Webfleet and its suppliers provide the Hardware "AS IS AND WITH ALL FAULTS", and hereby disclaim all other warranties and conditions, whether express, implied or statutory, including, but not limited to, any (if any) implied warranties, duties or conditions of satisfactory quality, of fitness for a particular purpose, of reliability or availability, of accuracy or completeness of responses, of results, of workmanlike effort, of lack of viruses, and of

reasonable care and skill, all with regard to the Hardware, and the provision of or failure to provide support or other services, information, software, and related content through the Hardware or otherwise arising out of the use of the Hardware. Also, there is no warranty or condition of quiet enjoyment, quiet possession, or non-infringement with regard to the Hardware. This exclusion does not apply to

(I) any implied condition as to title and

(II) any implied warranty as to conformity with description.

7 This Limited Warranty does not affect any legal rights under applicable national legislation governing the sale of consumer goods.

8 This Limited Warranty cannot be transferred to any other person.

LIMITATION OF LIABILITY

9 Neither Webfleet nor its suppliers shall be liable to you or to any third party for any damages either direct, indirect, incidental, consequential or otherwise (including in each case, but not limited to, damages for the inability to use the equipment or access data, loss of data, loss of business, loss of profits, business interruption or the like) arising out of the use of or inability to use the Hardware even if Webfleet has been advised of the possibility of such damages.

10 Notwithstanding any damages that you might incur for any reason whatsoever (including, without limitation, all damages referenced herein and all direct or general damages in contract or anything else), the entire liability of Webfleet and any of its suppliers shall be limited to the amount actually paid by you for the Hardware.

11 Webfleet shall not be liable for

(I) any fraud on the part of its employees and/or agents; or

(II) any fraudulent misrepresentation on the part of its employees and/or agents.

12 Notwithstanding the above, neither party's liability for death or personal injury resulting from its own negligence shall be limited.