webfleet

LINK 740

Future-proof vehicle tracking and fleet management for any type of vehicle

Take your fleet management to the next level

The first-choice fleet management device optimizes your workflow with broad integration. Equipped with CAN & Bluetooth connectivity and offering I/O interfaces, LINK 740 is designed to improve your fleet's performance, helping your business advance to the next level.

Contents

1. Introduction
   - What's new
2. Summary
   - Highlights
   - Security by design
   - Service integration
3. Features
   - Overview
   - Integration with CAN Data
   - I/O integration
4. Benefits
   - Customer benefits
5. Requirements and price
6. Appendix
   - Specifications: LINK 740
   - Specifications: LINK CAN Sensor (LCS 100)
   - Compatible Accessories

What's new

- LINK 740 is the successor to LINK 530 with many additional improvements:
  - Mobile networks connectivity: integrated mobile network module with LTE-M and GPRS technology
  - Optional CAN-bus[1] connectivity in combination with LINK CAN Sensor 100 (LCS 100)
  - End-to-end data security and data privacy
  - Crash detection support
  - More I/O ports (1-wire interface and up to 5 in/output)

LINK 740

LINK CAN Sensor 100
(LCS 100)

[1] CAN (Controller Area Network) is the most important bus system in a vehicle, acting as a central networking system.

Highlights

LINK 740 is Webfleet Solutions' next generation fleet management device, featuring:

- A GNSS receiver and mobile network module in one unit, providing the vehicle's current position and sending vehicle data to the Webfleet telematics service platform.
- Designed with end-to-end security, taking care of **data security & data privacy**.
- Support crash detection and driving behavior analyses to help your drivers achieve a **greener, safer** and **efficient** driving style.
- Compact hardware size with built-in antennae is meant for a faster installation.
- Built with **CAN connectivity**, enabling access to **enhanced vehicle data**[2] read from any vehicle type.
- The optional LINK CAN Sensor 100 (LCS 100) offers **non-intrusive** and **easy integration** between the LINK 740 device, and the CAN bus of your vehicle.
- Bluetooth and multiple I/O interfaces enable **a wide range of integration** with additional hardware.

[2] The availability is subject to vehicle/model.

Security by design

- At Webfleet Solutions, we treat our customers' data seriously and are capable of securing the product from the beginning to the end, that is, from the hardware, software to the data transferred to our service platform.
- LINK 740 design is checked by the independent security experts and we keep an eye on security during life cycle management.
- LINK 740 sends vehicle data to our **ISO 27001 certified** Webfleet telematics service platform, which fulfils the highest industry standard for data security, quality and availability.

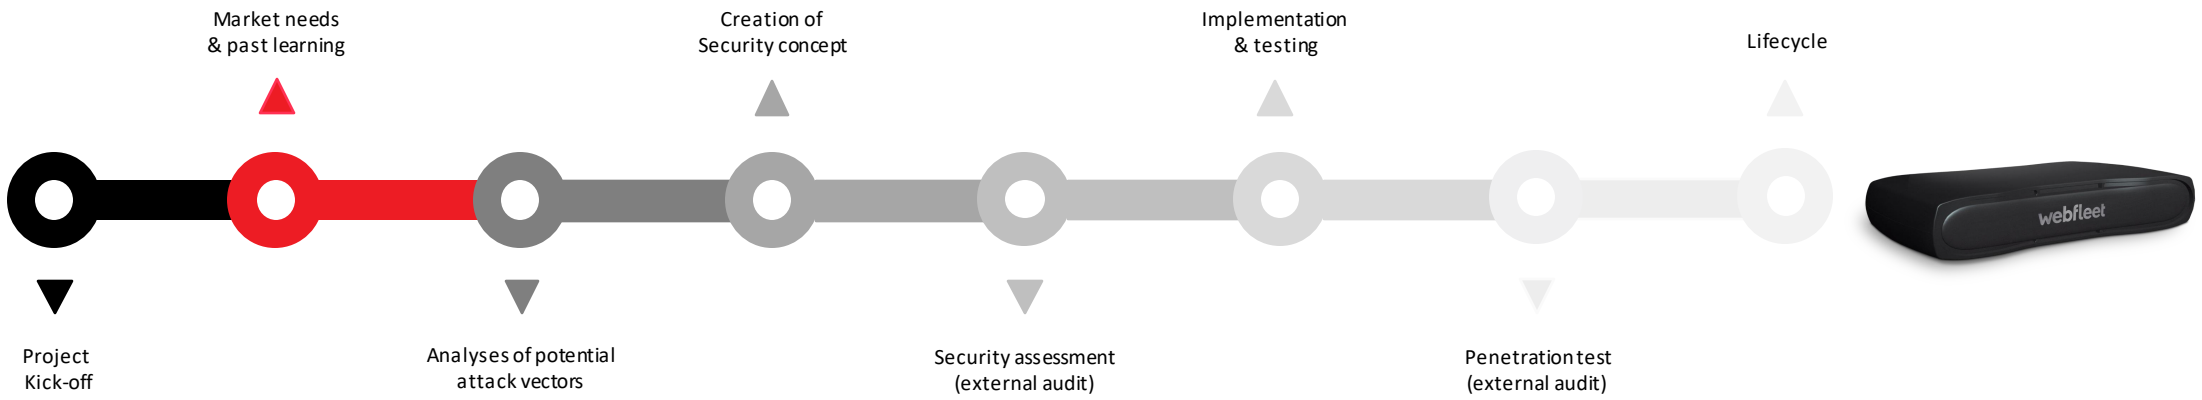

Service integration

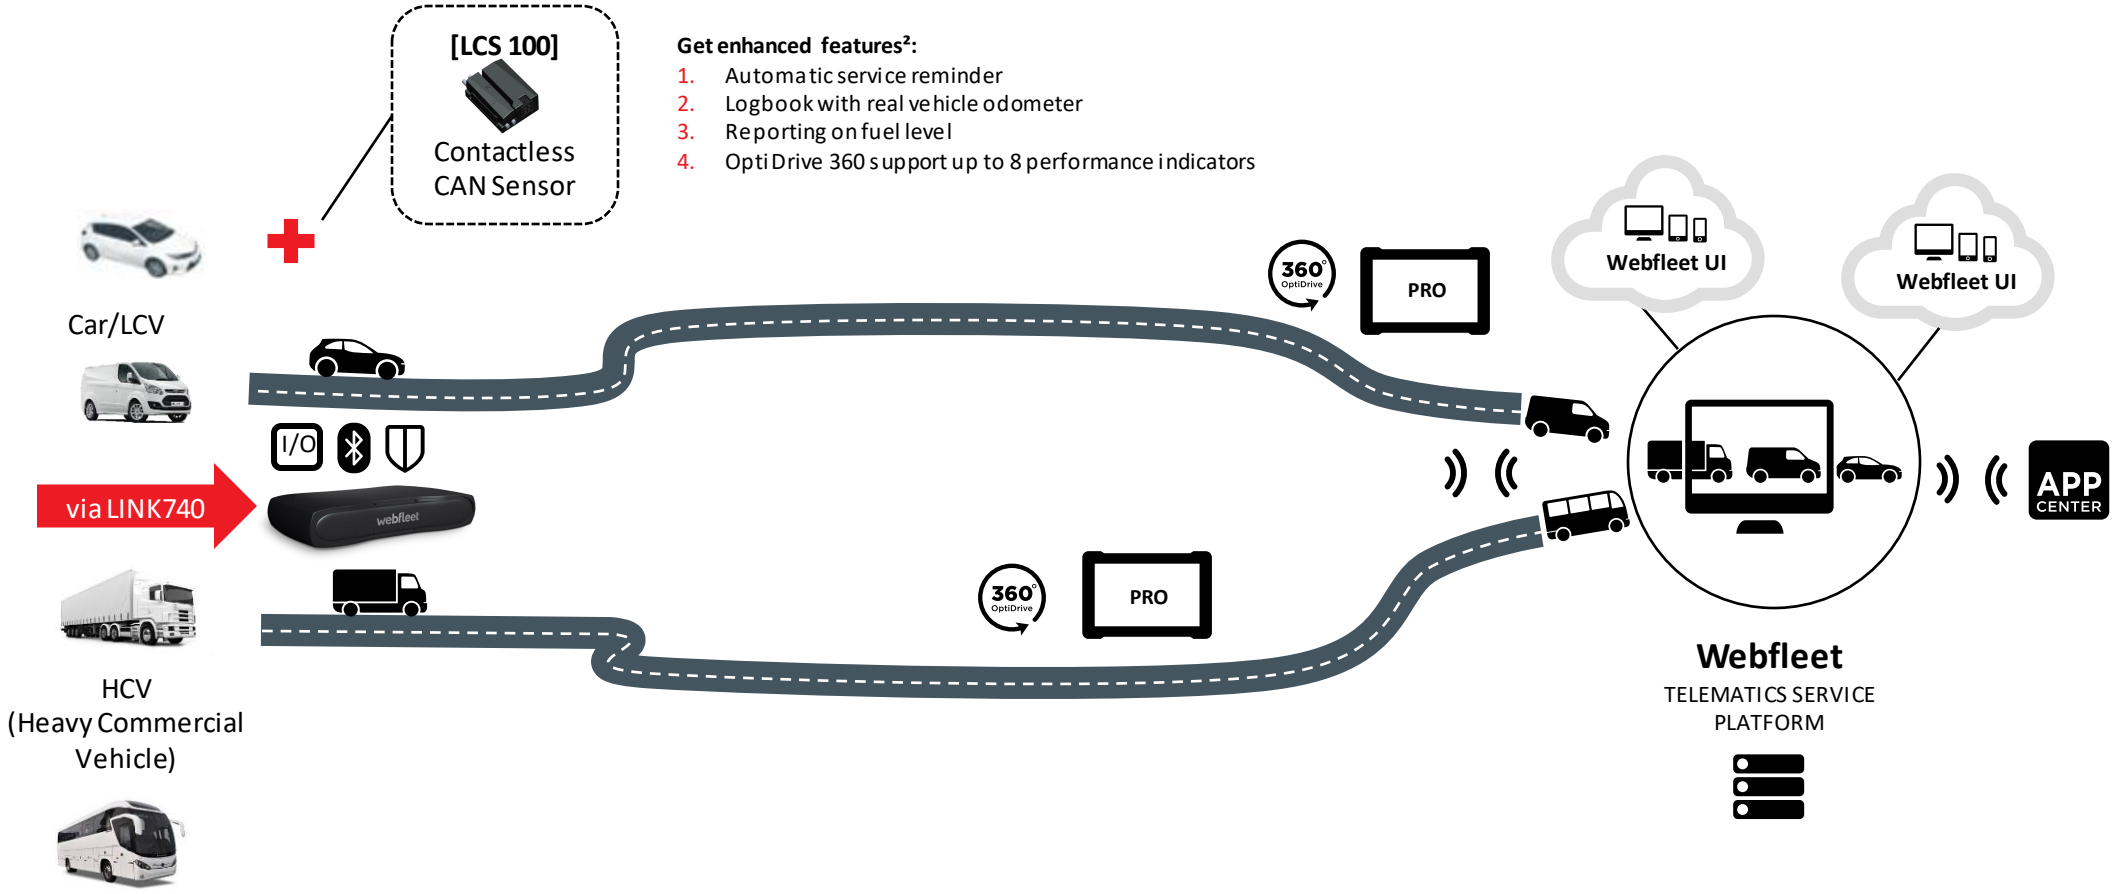

Get enhanced features[2]:

1. Automatic service reminder
2. Logbook with real vehicle odometer
3. Reporting on fuel level
4. OptiDrive 360 support up to 8 performance indicators

[2] The availability is subject to vehicle/model.

Overview

Track and trace

View driving times, mileage and locations of your fleet in real time or over a chosen time period.

Fleet performance reporting

Get 24/7 access to comprehensive vehicle and driver insight reports.

Choose 3-wire or non-intrusive installation

The optional LINK CAN Sensor 100 enables the LINK 740 to read CAN bus information via a contactless connection.

Fuel consumption & charging status

Read real-time and historical insights on your fleet's fuel usage, and battery charging status of your electrical vehicles[4].

Mileage overview & logbook functionality

Mileage and trip data can be analysed per group or fleet across a chosen time period, while logbook with real vehicle odometer[4] allows precise sorting of private and business trip data.

Crash detection & driving behaviour

Get notified when an accident is detected. OptiDrive 360 provides driving style insights on up to 8 performance indicators[5].

Maintenance & service reminders

Plan maintenance and service tasks based on real-time mileage information.

Vehicle malfunction notifications

Get automatic notifications[4] about vehicle or engine malfunctions.

[4] FMS or CAN connection required and subject to vehicle/model.
[5] OptiDrive 360 8 performance indicators: speeding, constant speed, driving events, coasting, idling, green speed, fuel consumption and gear shifting.
These features are available when a LINK 740 is used in combination with Webfleet for which a subscription is needed.

Overview

In- and Outputs functionality integration

With 1-wire interface & I/O connections up to 5 devices simultaneously, you are offered a large variety of different uses. E.g. emergency button, remote door lock, buzzer or door sensor for safety use case; enforces driver ID by connecting PRO 2020 or iButton[5], Private/Business button allows easy and automatic log of business and private mileage.

Bluetooth integration

Your PRO Driver Terminals can connect with Bluetooth for advanced workflow management, e.g. order dispatch, navigation and more.

[6] iButton = ID key = Dallas key.

Integration with CAN Data

A Controller Area Network (CAN)

is the most important bus system in a vehicle, acting as a central networking system without complex wiring in between to allow communication among in-vehicle controllers and ECUs (Electronic Control Units).

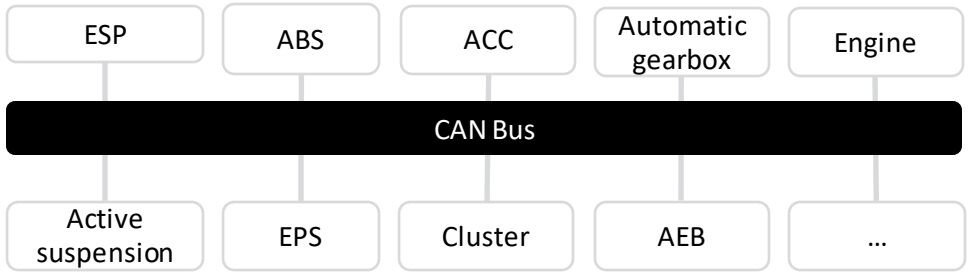

- **CAN data readiness is vehicle/model specific**, and may be required from more than one CAN bus channel to read out CAN based vehicle data.
- **> 600 vehicle models** are already CAN data supported[2] with Webfleet Solutions.

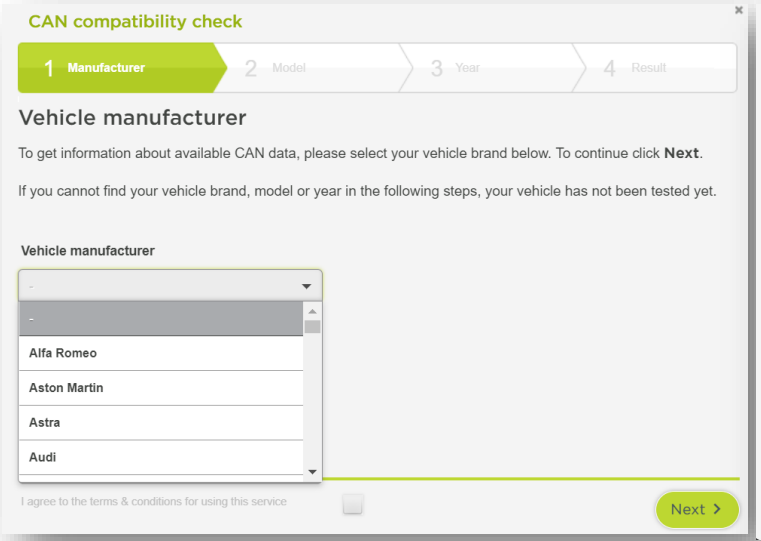

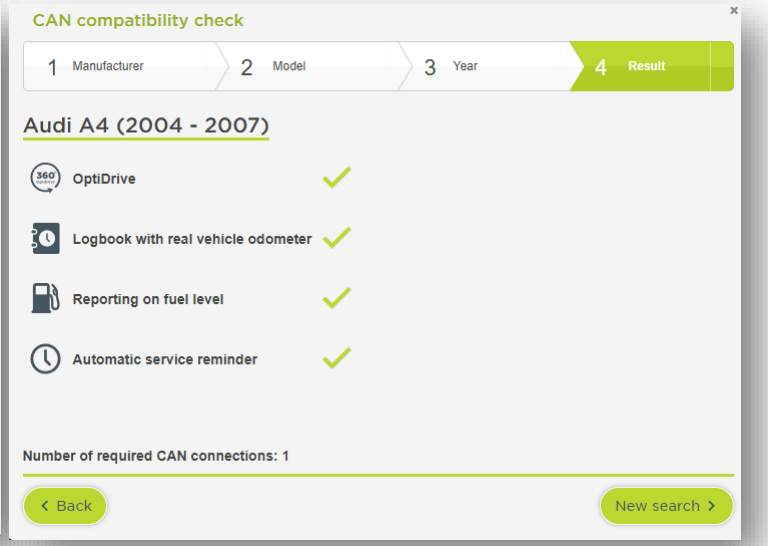

Visit CAN compatibility check

to get information about available CAN data that your vehicle model can benefit.

[3] The availability is subject to vehicle/model.

Integration with CAN Data – using LINK CAN Sensor

The **LINK CAN Sensor 100 (LCS 100)** is designed to combine with a LINK 740. This powerful accessory lets your LINK device read CAN bus information using a contactless connection between your LINK 740, and the CAN bus of your vehicle.

Benefits from using the LCS 100:

Easy CAN bus connection
Install with ease on a wide range of vehicles thanks to compact hardware design and removable CAN cable clip.

Precise vehicle status read via CAN bus[3]
Access more precise vehicle status monitoring with information on real vehicle odometer, fuel consumption, inspection intervals and malfunction indicators sent directly from CAN bus.

Smarter integration
Save power consumption[7] as the LCS 100 is controlled and powered by the LINK 740 without an extra power supply.

Extended CAN bus connections
Does your vehicle require more than one CAN bus connection? LCS 100's data/power cable allows you to connect up to two LCS 100 to your LINK 740.

LINK CAN Sensor 100 (LCS 100)

[3] The availability is subject to vehicle/model.
[7] Lower power consumption compared to other similar devices.

I/O integration

The LINK 740 features a broad variety of I/O interfaces enabling multiple integration possibilities across all vehicle sizes and fleet types.

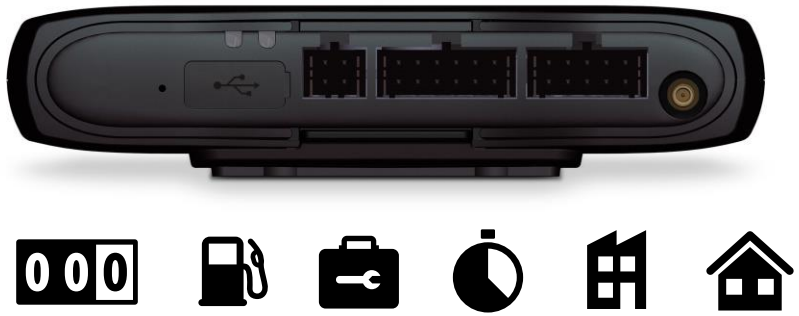

CAN interfaces:

- 3 CAN bus channels for advanced vehicle data

Private/Business button:

- Seamlessly switch between private and business trips

1-wire interface:

- Connects to iButton[5] reader for driver identification

Interface for PRO 2020:

- Driver ID
- Working time
- Logbook
- OptiDrive KPI's

Bluetooth:

- Acquires OBD information via LINK 105
- Connects Driver Terminals, e.g. PRO 7 / PRO 8

Inputs / Outputs:

- Digital input and output

[6] iButton = ID key = Dallas key.

Customer benefits

Optimize your workflow & business performance

- Improve fleet performance using precise, in-depth and up-to-date vehicle data[3].
- Reduce your running costs by monitoring real-time and historical fuel usage[3] closely.
- Identify areas of improvement and make effective decisions using our comprehensive reports.

Get the most from broad integration

- Integrate easily with additional hardware, e.g. PRO Driver Terminals, sensors, fuel cap secure, trailer monitoring and more.
- Access a wide range of business applications through Bluetooth & multiple I/O interfaces.

Take the stress out your operation

- Manage your tax responsibilities using automatic logbook via real vehicle odometer[3].
- Improve your drivers' performance and safety with driving style analyses.
- Stay on top of maintenance and service schedule with timely reminders[3].

[3] CAN connection required and subject to vehicle/model.

Requirements and price

- Supported Webfleet tariffs
  - LINK, ECO, NAV and LIVE tariff

- Features requirements (car & LCV)
  - Real vehicle odometer: LINK tariff or higher
    - CAN connection required and subject to vehicle/model.
  - CAN features: ECO tariff or higher
    - Automatic service reminder
    - Reporting on fuel level
    - OptiDrive 360 support up to 8 performance indicators

- Commercial terms
  - Device standalone price:
    - LINK 740 device 249 USD (rental available)
  - Accessories:
    - LINK 6xx/7xx LCS 100 1 sensor: 29 USD
    - LINK 6xx/7xx LCS 100 2 sensors: 39 USD

Specifications: LINK 740

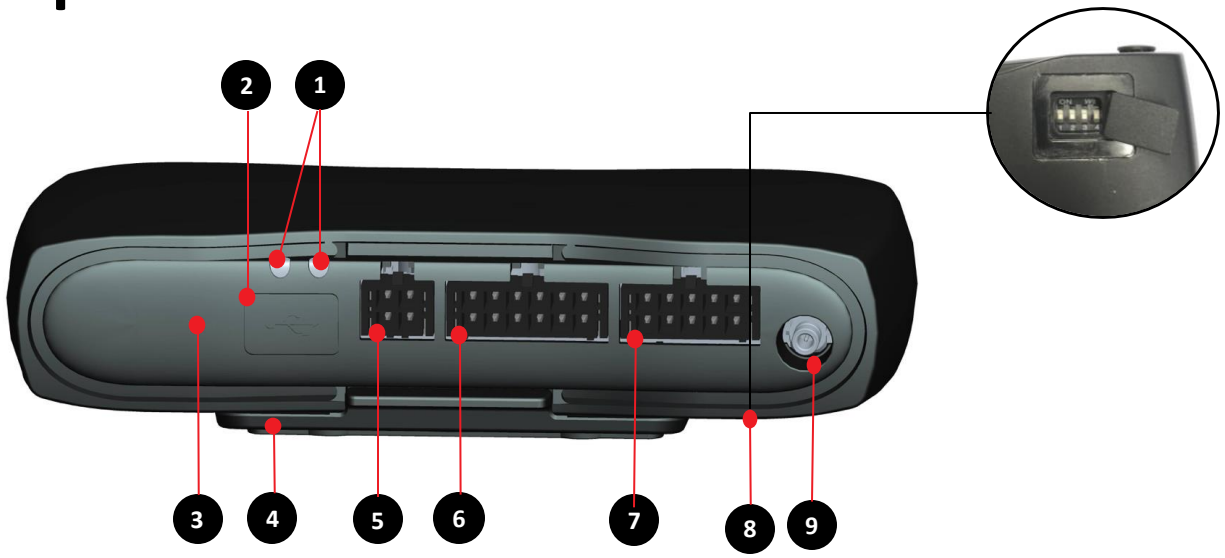

1. 2x LEDs for system and network status indication
2. Mini USB port for diagnostics
3. Reset button
4. Removable mounting adapter (can be mounted both sides of the device)
5. 1-Wire connector
6. Multiple IN/OUT connector
7. Power/CAN connector
8. DIP switch to enable CAN bus writing (default: disabled)
9. External GNSS antenna connector

Dimensions	122 x 59 x 24 mm / 4.80 x 2.32 x 0.94 inches (w/o mounting holder)
Weight	96 g / 3.39 oz (w/o mounting holder)
Supply voltage	12 V / 24 V (min 9 V to max 30 V)
Temperature	Operation: -30 °C to +70 °C / -22 °F to +158 °F
Protection class	IP 20
Mobile networks	Integrated mobile network module with LTE-M and GPRS technology
GNSS	Integrated GNSS antenna and GNSS receiver – connector for optional external antenna
Acceleration sensor	3-axis sensor (±2 g /±4 g /±8 g)
Current / power consumption (average values)	At 14 V: • Typically < 50mA / < 0.7 W • During data transmission <150mA / < 2.1 W At 28 V: • Typically < 30mA / < 0.84 W • During data transmission < 100mA / < 2.8 W Standby: Typically <1.5mA / < 0.05 W
Mounting	Holder for self-tapping screws or sticky pad

Specifications: LINK CAN Sensor (LCS 100)

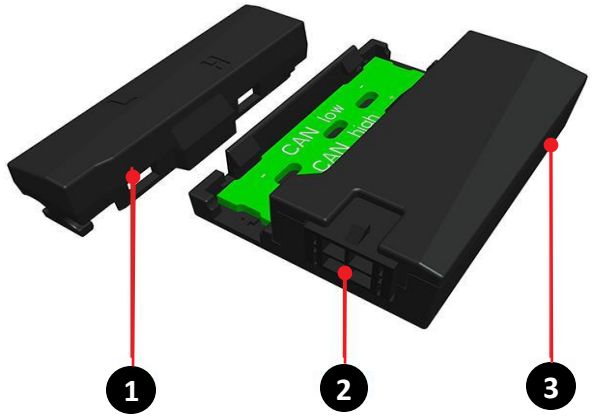

Dimensions	40.6 x 30 x 12.6 mm (L/W/H)
Weight	12g
Supply voltage	5 V (min. 4 V to max. 8 V)
Temperature	Operation: -30 °C to +70 °C Storage: -40 °C to +85 °C
Protection class	IP 20
Current / power consumption (average values)	At 5 V: Typically < 3 mA / < 0.0135 W Standby: Typically < 0.1 mA / < 0.00275 W Low: 0 V (-0.1 V) High: 3.8 V (+/- 0.15V)

1. LINK CAN Sensor 100 CAN Cable Clip with markings for CAN high (H) and CAN low (L)
2. 4-pin Data/Power Cable connector
3. LED indicating data traffic

The details listed in the product specification are intended to provide a general description of the product and are subject to change.

Compatible Accessories

LINK CAN Sensor 100 (LCS 100)

The LCS 100 is a key accessory designed for non-intrusive installation and recommended to be used in combination with a LINK 740. It's a CAN sensor that lets your LINK device read CAN bus information using a contactless connection between your LINK 740 and the CAN bus of your vehicle.

LINK 105

The LINK 105 is a small OBD device that connects with a vehicle's engine and gives managers a real-time view of fuel efficiency, RPM and gear use to assist with fuel and CO_2 saving initiatives as well as DTC and MIL information to keep your fleet safe on the road.

PRO Driver Terminals

The PRO device is the perfect choice for professional navigation. Benefit from the best traffic information combined with Webfleet. Send messages or order details to the PRO screen to increase drivers' safety and to maximise the efficiency of your fleet.

PRO 2020

The PRO 2020 – Feature rich, easy to install, Driver Terminal. PRO 2020 expands the features of your LINK device with driver identification, logbook, working, driving modes, fuel information in one easy to read interface.

BRIDGESTONE

Solutions for your journey

Copyright © Bridgestone Corporation