

SENSORS




MOLEX 43025-2200
2x11 pin

CRIMP : MOLEX 43030-0001



Cable Specifications

Circuits: 22
Size: 24 AWG, 1m
Conductor: Tinned Stranded Copper
Insulation: PTFE/FEP - UL1332 - 200C


Colors



VIEWED FROM MATING SIDE

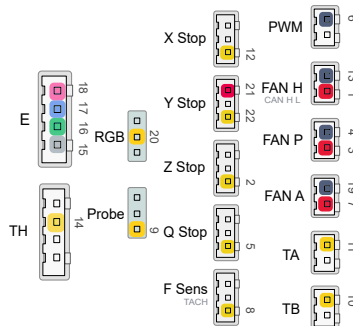

STEPPERS





MOLEX 43025-2400
2x12 pin

CRIMP : MOLEX 43030-0001

Cable Specifications

Circuits: 24
Size: 24 AWG, 1m
Conductor: Tinned Stranded Copper
Insulation: PTFE/FEP - UL1332 - 200C

Color



VIEWED FROM MATING SIDE

DRIVER



JST XHP-4



POWER




MOLEX 39014051 / 39014050
1x5 pin

CRIMP : MOLEX 45750-3111/3112 - 13 A Current Rating


Cable Specifications

Circuits: 5
Size: 16 AWG, 1m
Conductor: Tinned Stranded Copper
Insulation: Silicone - UL3586 - 200C

Colors



VIEWED FROM MATING SIDE




~ Weidmüller 0463100000

x2

~ Weidmüller 9200310000

x3

WIRING HARNESS SLEEVING



~ Techflex - Flexo F6
F6N0.50BK

Specifications

Size: ~12.7mm, 85 cm
Lateral Split, Semi-rigid Braided PET Sleeve

Color: Black