

SENSORS




MOLEX 43025-2200
2x11 pin


CRIMP : MOLEX 43030-0001

Cable Specifications


Circuits: 22
Size: 24 AWG, 1m
Conductor: Tinned Stranded Copper
Insulation: PTFE/FEP - UL1332 - 200C



VIEWED FROM MATING SIDE

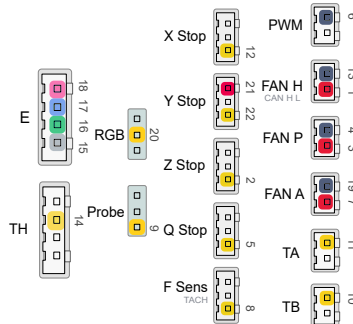

STEPPERS




MOLEX 43025-2400
2x12 pin

CRIMP : MOLEX 43030-0001


Cable Specifications

Circuits: 24
Size: 24 AWG, 1m
Conductor: Tinned Stranded Copper
Insulation: PTFE/FEP - UL1332 - 200C



VIEWED FROM MATING SIDE

DRIVER



JST XHP-4 X6

POWER




MOLEX 39014051
/ 39014050
1x5 pin



CRIMP : MOLEX 45750-3111/3112 - 13 A Current Rating

Cable Specifications


Circuits: 5
Size: 16 AWG, 1m
Conductor: Tinned Stranded Copper
Insulation: Silicone - UL3239/3586 - 200C



VIEWED FROM MATING SIDE

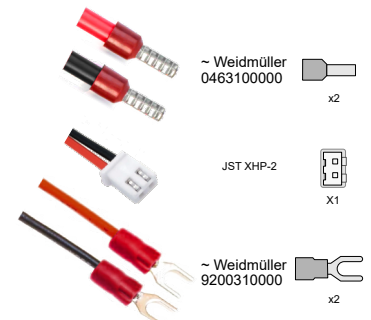

WIRING HARNESS SLEEVING



~ Techflex - Flexo F6
F6N0.50BK

Specifications

Size: ~12.7mm, 85 cm
Lateral Split, Semi-rigid Braided PET Sleeve

Color: Black