

SENSORS




MOLEX 43025-2200
2x11 pin

CRIMP : MOLEX 43030-0001


Cable Specifications

Circuits: 22
Size: 24 AWG, 1.5m
Conductor: Tinned Stranded Copper
Insulation: PTFE/FEP - UL1332 - 200C


Colors



VIEWED FROM MATING SIDE

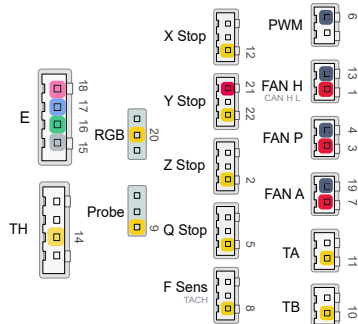

STEPPERS





MOLEX 43025-2400
2x12 pin

CRIMP : MOLEX 43030-0001

Cable Specifications

Circuits: 24
Size: 24 AWG, 1.5m
Conductor: Tinned Stranded Copper
Insulation: PTFE/FEP - UL1332 - 200C

Color



DRIVER



POWER






MOLEX 39014051 / 39014050
1x5 pin

CRIMP : MOLEX 45750-3111/3112 - 13 A Current Rating ⚠


Cable Specifications

Circuits: 5
Size: 16 AWG, 1.5m
Conductor: Tinned Stranded Copper
Insulation: Silicone - UL3586 - 200C

Colors

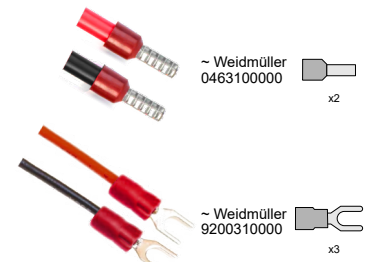

WIRING HARNESS SLEEVING



~ Techflex - Flexo F6
F6N0.50BK

Specifications

Size: ~12.7mm, 1.25m
Lateral Split, Semi-rigid Braided PET Sleeve

Color: Black