

## SENSORS




**MOLEX 43025-2200**  
2x11 pin

CRIMP : MOLEX 43030-0001



### Cable Specifications

Circuits: 22  
Size: 24 AWG, 1m  
Conductor: Tinned Stranded Copper  
Insulation: PTFE/FEP - UL1332 - 200C


#### Colors



VIEWED FROM MATING SIDE

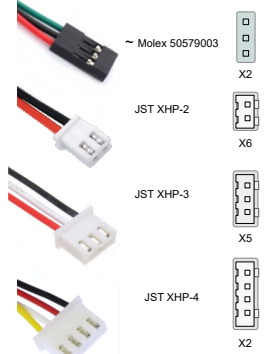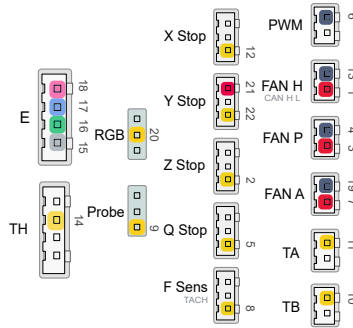

## STEPPERS





**MOLEX 43025-2400**  
2x12 pin

CRIMP : MOLEX 43030-0001

### Cable Specifications

Circuits: 24  
Size: 24 AWG, 1m  
Conductor: Tinned Stranded Copper  
Insulation: PTFE/FEP - UL1332 - 200C

#### Color




VIEWED FROM MATING SIDE

DRIVER



## POWER





**MOLEX 39014051**  
/ 39014050  
1x5 pin

CRIMP : MOLEX 45750-3111/3112 - 13 A Current Rating



### Cable Specifications

Circuits: 5  
Size: 16 AWG, 1m  
Conductor: Tinned Stranded Copper  
Insulation: Silicone - UL3586 - 200C


#### Colors



VIEWED FROM MATING SIDE

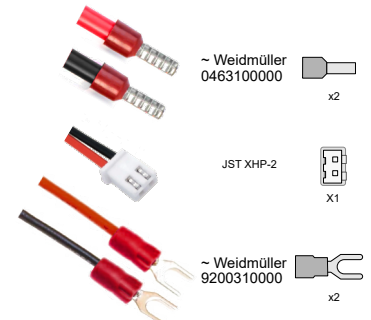

## WIRING HARNESS SLEEVING



~ Techflex - Flexo F6  
F6N0.50BK

### Specifications

Size: ~12.7mm, 85 cm  
Lateral Split, Semi-rigid Braided PET Sleeve

Color: Black