

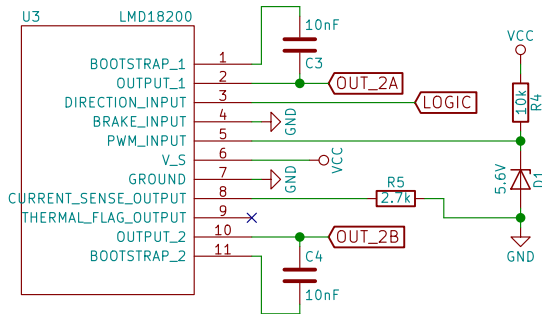
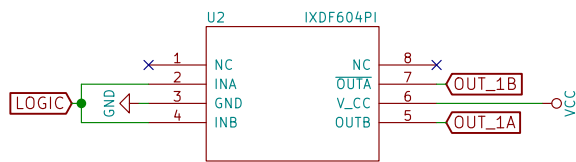
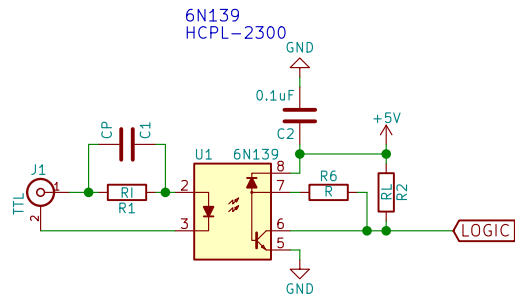




Rev 1.1:  
 -Added additional optional resistor (R6) for 6N139 to allow speeding up.  
 (See AN-3002)




Shutter coil  
 Headers for souce and polarity select.

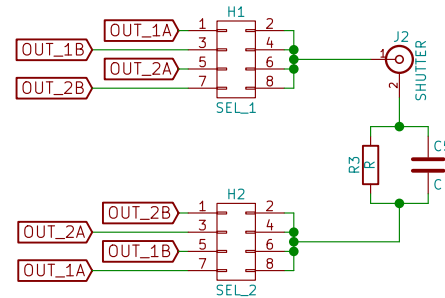

Basic power supply filtering and protection diodes



Optimal jumper for using a single power supply  
 -6N139: < 18 V  
 -HCPL-2300: < 7 V



Rice University

Sheet: /  
 File: Shutter\_Driver.sch

Title: Shutter Driver

Size: A Date: 2017-02-20

KiCad E.D.A. kicad 4.0.6

Rev: 1.1

Id: 1/1