

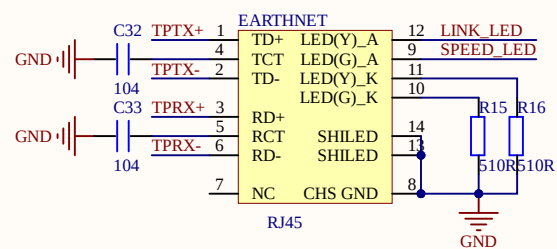


EARTHNET

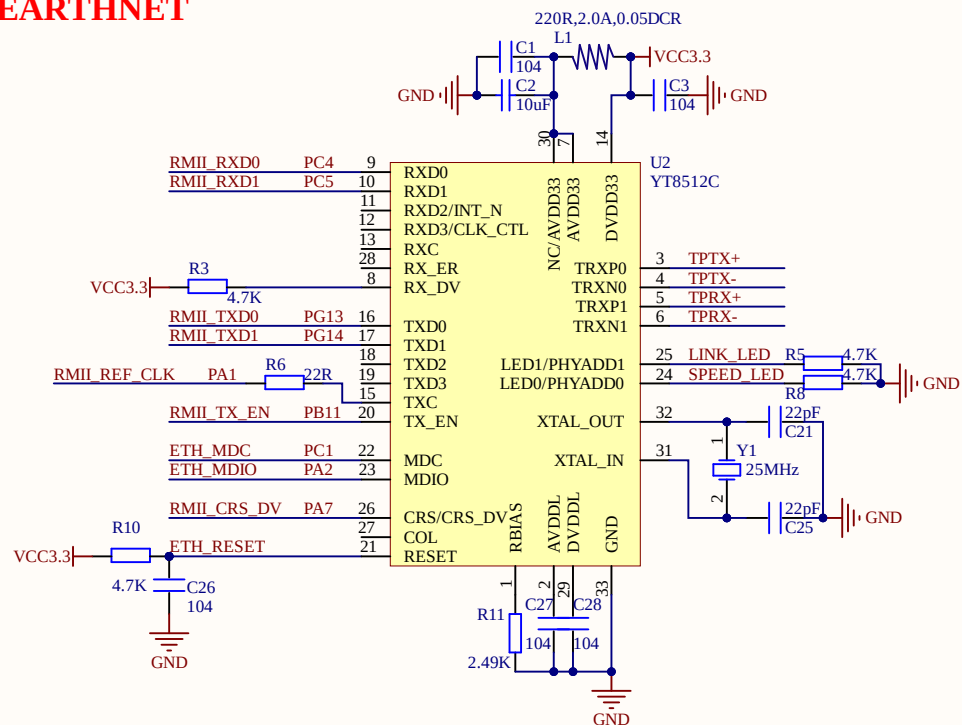


I2S DAC&ADC

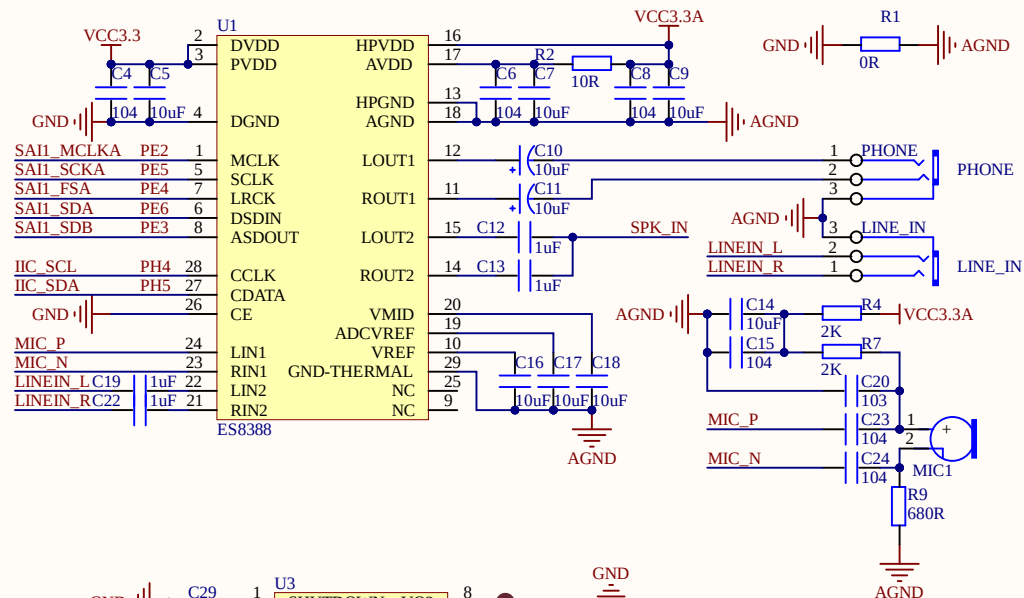



SPK+和**SPK-**连接开发板自带的喇叭，在开发板底部。

PWM DAC/AUDIO

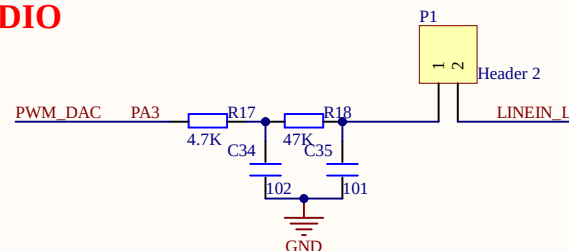


Title:	APOLLO_AUDIOÐNET		Cannot open file F:\protel study\元件库\正 点原子_整_NEW bmp
Author:	Size:	A4	
Date:	File:	AUDIOÐNET.SchDoc	
Revision:	Version:	V2.5	
V2.5	V2.5		


CORE BOARD

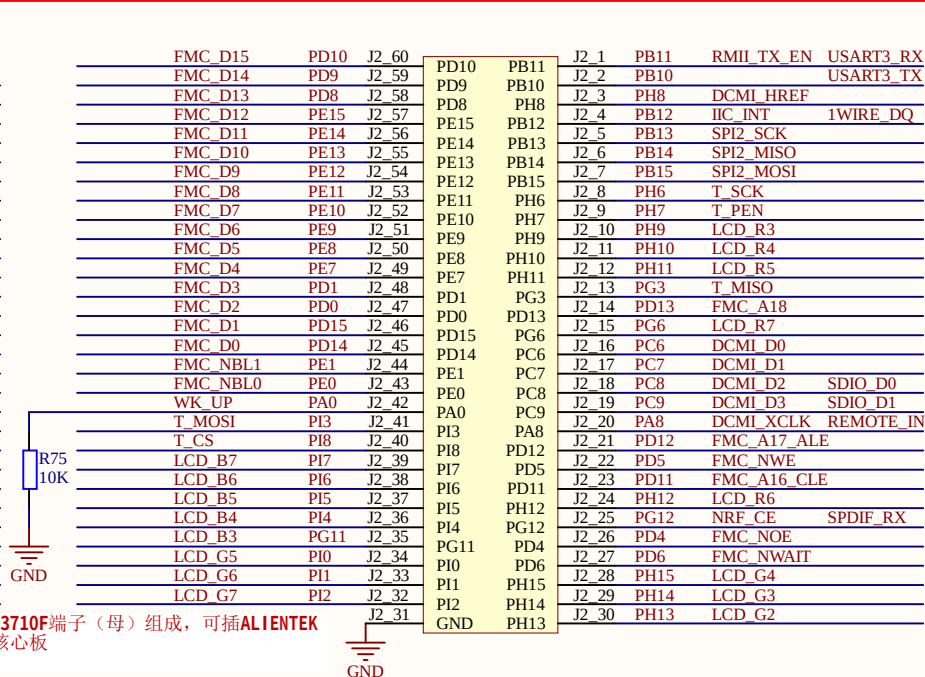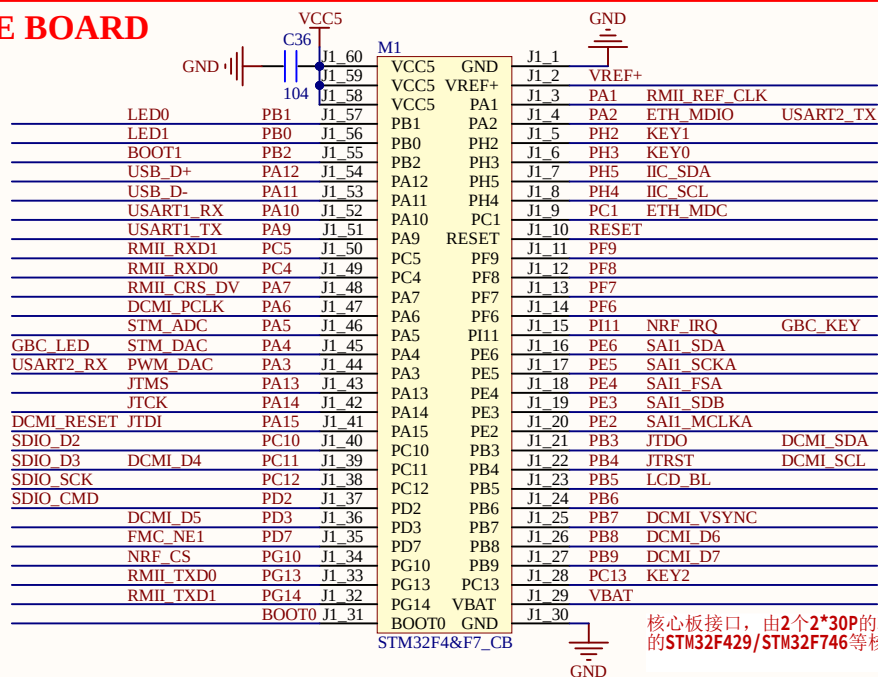


IO

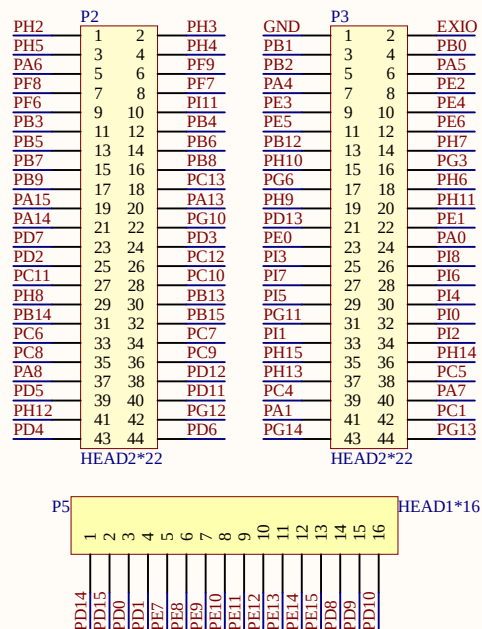



RESET



VBAT




BOOT

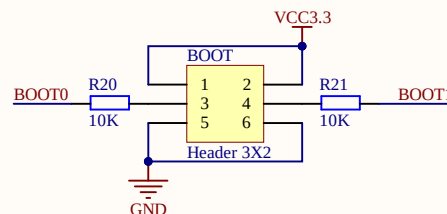**VREF**

MCU参考电压选择端口，同时可以控制核心板上**LED**的亮灭，如果**P5**短接，则核心板上面的电源灯(**PWR**)和**DS0**都不会亮。如果需要核心板上面的**LED**亮，拔掉**P5**的跳线帽即可。

LCD(MCU)

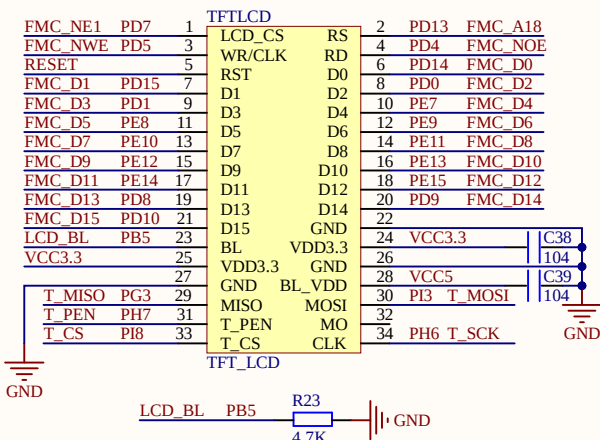

Title: APOLLO CORE		Cannot open file F:\protel study\元件库\正 点原子_整_NEW bmp
Author: ALIENTEK	Size: A4	
Date: 2026.03.02	File: CORE.SchDoc	
Revision: V2.5	Version: V2.5	

1



39



A



B



C




I




2.9




I

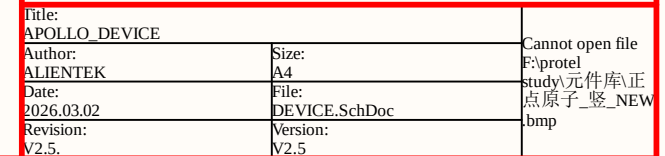


JTAG

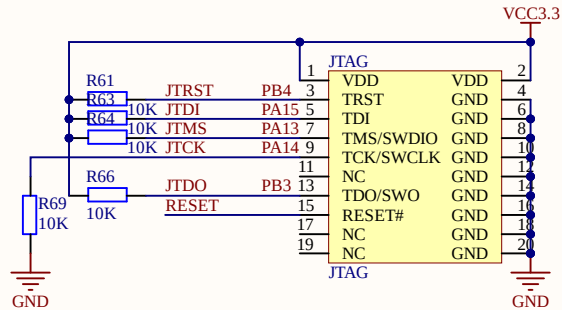


LED




REMOTE

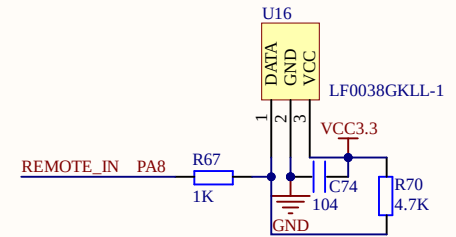


ALS&PS SENSOR

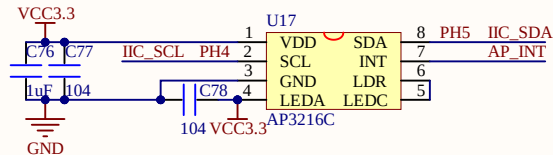


KEY




ATK MODULE




OPTICAL IN

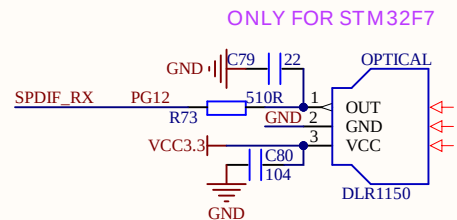


TOUCH_KEY




BEEP



USB_UART/USART1




ADC&DAC

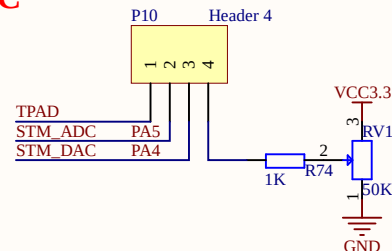


Title:	APOLLO DEVICE2	Cannot open file
Author:	ALIENTEK	F:\protel
Date:	2026.03.02	study\元件库\正
Revision:	V2.5	点原子_竖_NEW
Size:	A4	bmp
File:	DEVICE2.SchDoc	
Version:	V2.5	


DC POWER IN

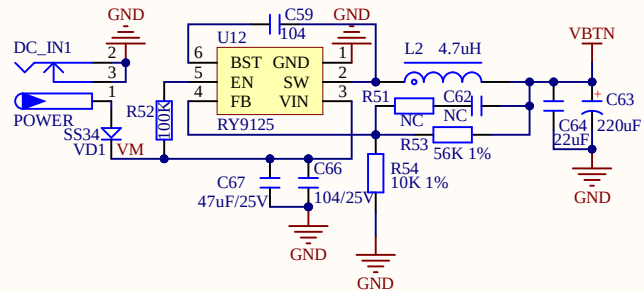


3.3V & POWER SWITCH

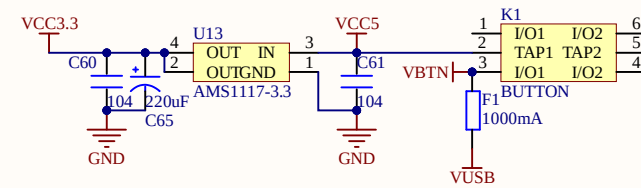


ANALOG POWER



USB USART&USB POWER

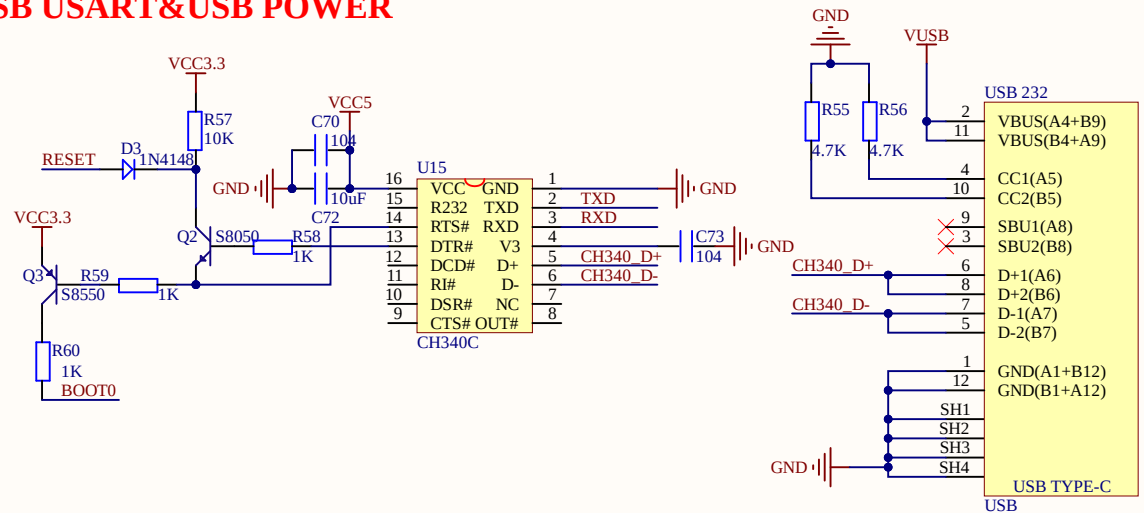

ON BOARD POWER SOURCE

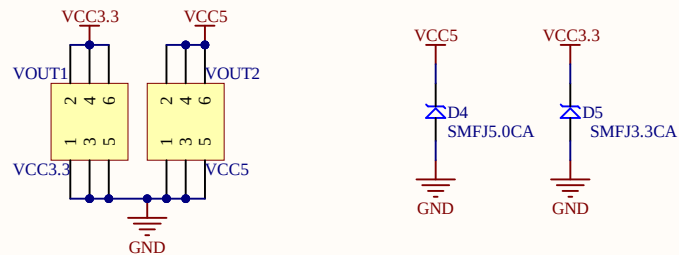

Title: APOLLO_POWER&USB USART		Cannot open file F:\protel study\元件库\正 点原子_竖_NEW bmp
Author: ALIENTEK	Size: A4	
Date: 2026.03.02	File: POWER&USB_USART.SchDoc	
Revision: V2.5	Version: V2.5	