

1. Description


1.1. Project

Project Name	05
Board Name	custom
Generated with:	STM32CubeMX 5.6.1
Date	09/07/2020

1.2. MCU

MCU Series	STM32F3
MCU Line	STM32F303
MCU name	STM32F303RETx
MCU Package	LQFP64
MCU Pin number	64

2. Pinout Configuration

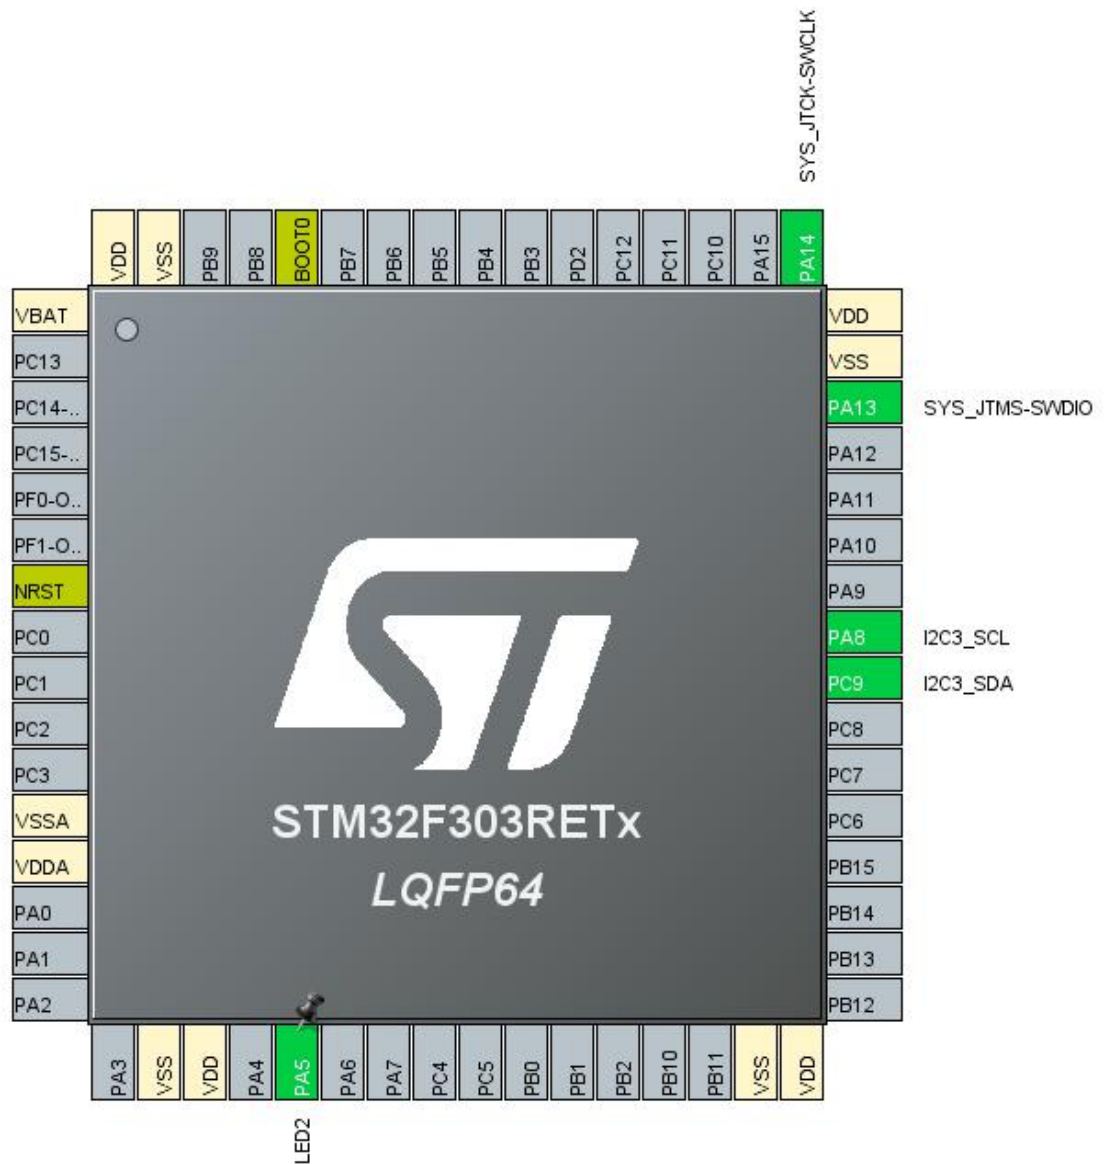


3. Pins Configuration

Pin Number LQFP64	Pin Name (function after reset)	Pin Type	Alternate Function(s)	Label
1	VBAT	Power		
7	NRST	Reset		
12	VSSA	Power		
13	VDDA	Power		
18	VSS	Power		
19	VDD	Power		
21	PA5 *	I/O	GPIO_Output	LED2
31	VSS	Power		
32	VDD	Power		
40	PC9	I/O	I2C3_SDA	
41	PA8	I/O	I2C3_SCL	
46	PA13	I/O	SYS_JTMS-SWDIO	
47	VSS	Power		
48	VDD	Power		
49	PA14	I/O	SYS_JTCK-SWCLK	
60	BOOT0	Boot		
63	VSS	Power		
64	VDD	Power		

* The pin is affected with an I/O function

4. Clock Tree Configuration

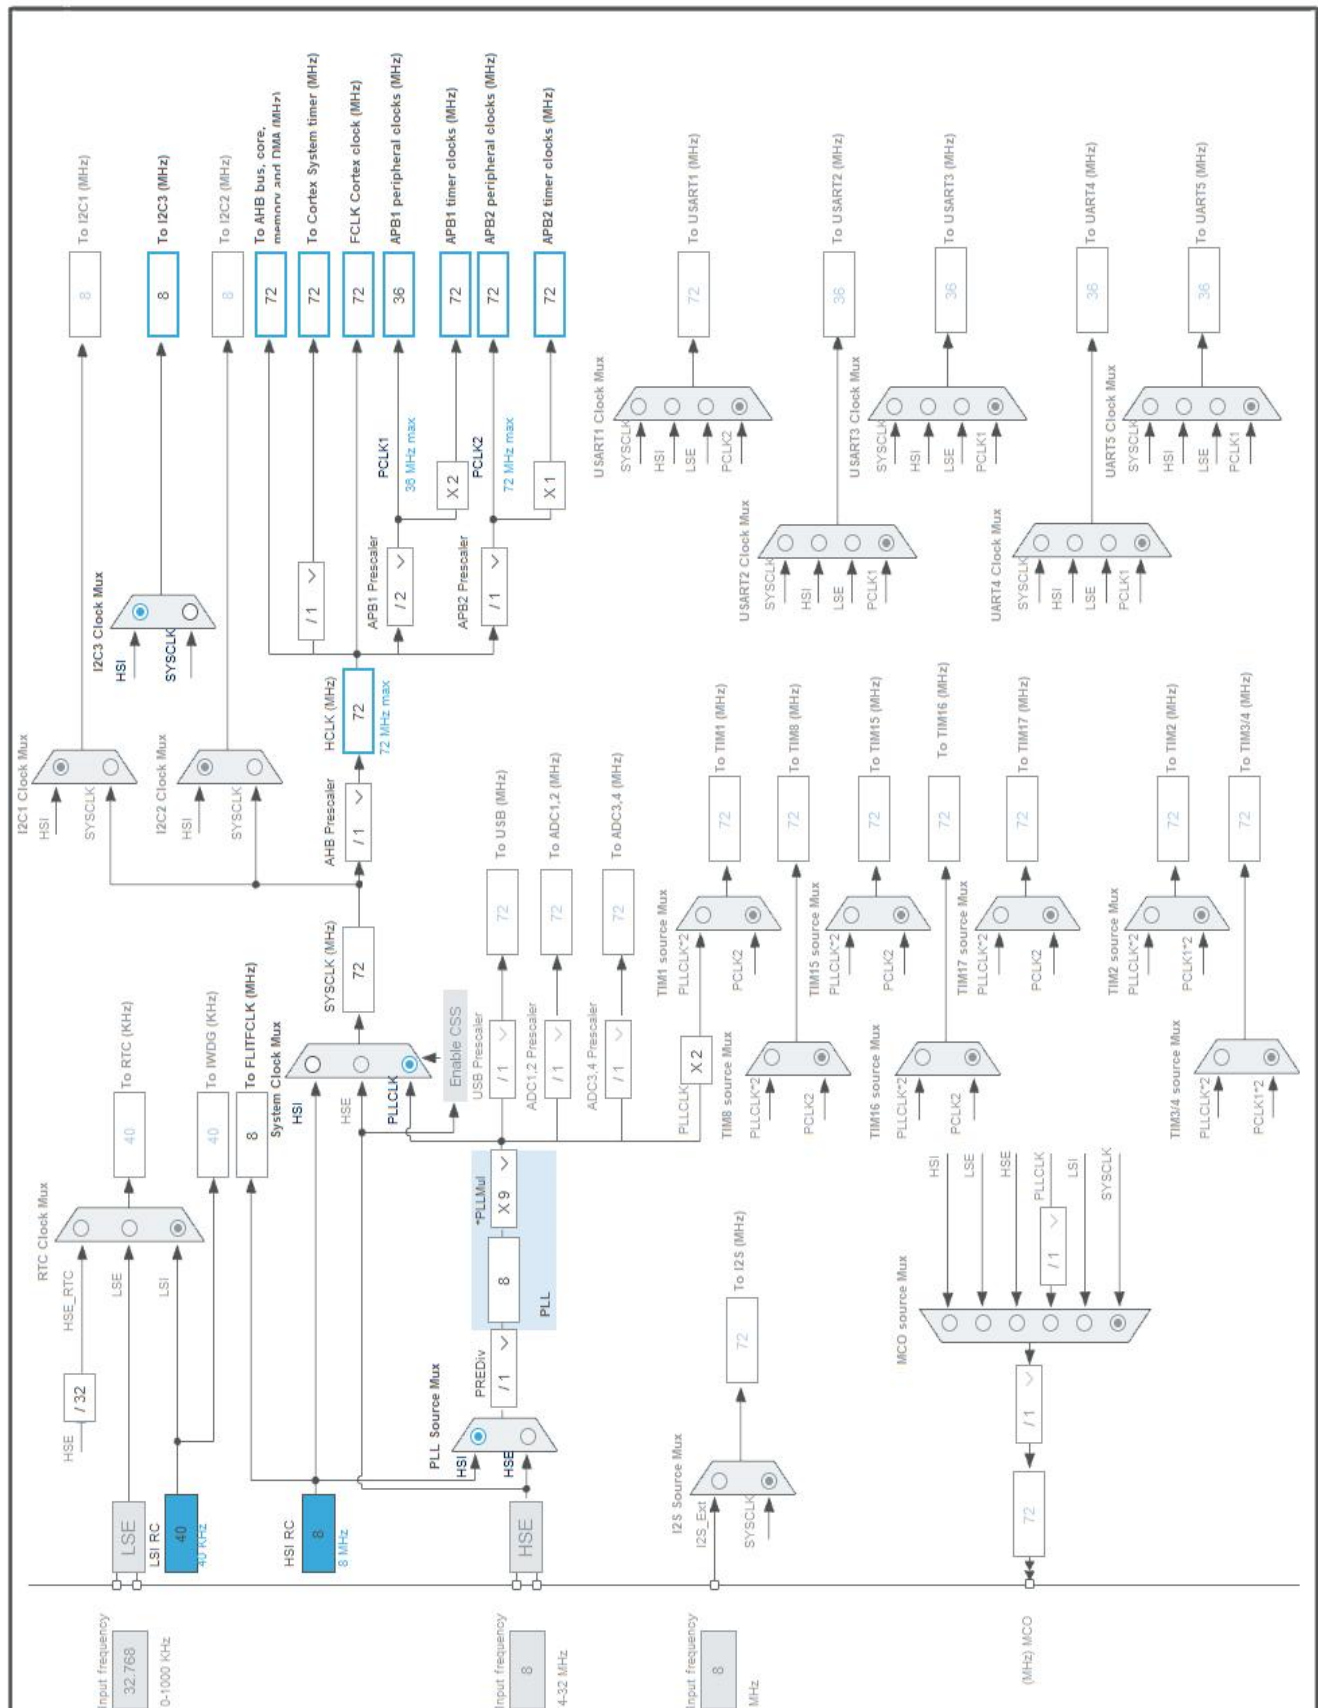

5. Software Project

5.1. Project Settings

Name	Value
Project Name	05.I2C
Project Folder	D:\z2.repos\Kimizhao\STM32Starer\05.I2C
Toolchain / IDE	STM32CubeIDE
Firmware Package Name and Version	STM32Cube FW_F3 V1.11.0

5.2. Code Generation Settings

Name	Value
STM32Cube MCU packages and embedded software	Copy only the necessary library files
Generate peripheral initialization as a pair of '.c/.h' files	No
Backup previously generated files when re-generating	No
Delete previously generated files when not re-generated	Yes
Set all free pins as analog (to optimize the power consumption)	No

6. Power Consumption Calculator report

6.1. Microcontroller Selection

Series	STM32F3
Line	STM32F303
MCU	STM32F303RETx
Datasheet	026415_Rev5

6.2. Parameter Selection

Temperature	25
Vdd	3.6

6.3. Battery Selection

Battery	Li-SOCL2(A3400)
Capacity	3400.0 mAh
Self Discharge	0.08 %/month
Nominal Voltage	3.6 V
Max Cont Current	100.0 mA
Max Pulse Current	200.0 mA
Cells in series	1
Cells in parallel	1


6.4. Sequence

Step	Step1	Step2
Mode	RUN	STOP
Vdd	3.6	3.6
Voltage Source	Battery	Battery
Range	No Scale	No Scale
Fetch Type	FLASH	n/a
CPU Frequency	72 MHz	0 Hz
Clock Configuration	HSEBYP PLL	Regulator LP
Clock Source Frequency	8 MHz	0 Hz
Peripherals		
Additional Cons.	0 mA	0 mA
Average Current	33.24 mA	9.8 μ A
Duration	0.1 ms	0.9 ms
DMIPS	63.0	0.0
Ta Max	99.5	105
Category	In DS Table	In DS Table

6.5. RESULTS

Sequence Time	1 ms	Average Current	3.33 mA
Battery Life	1 month, 12 days, 1 hour	Average DMIPS	63.0 DMIPS

6.6. Chart

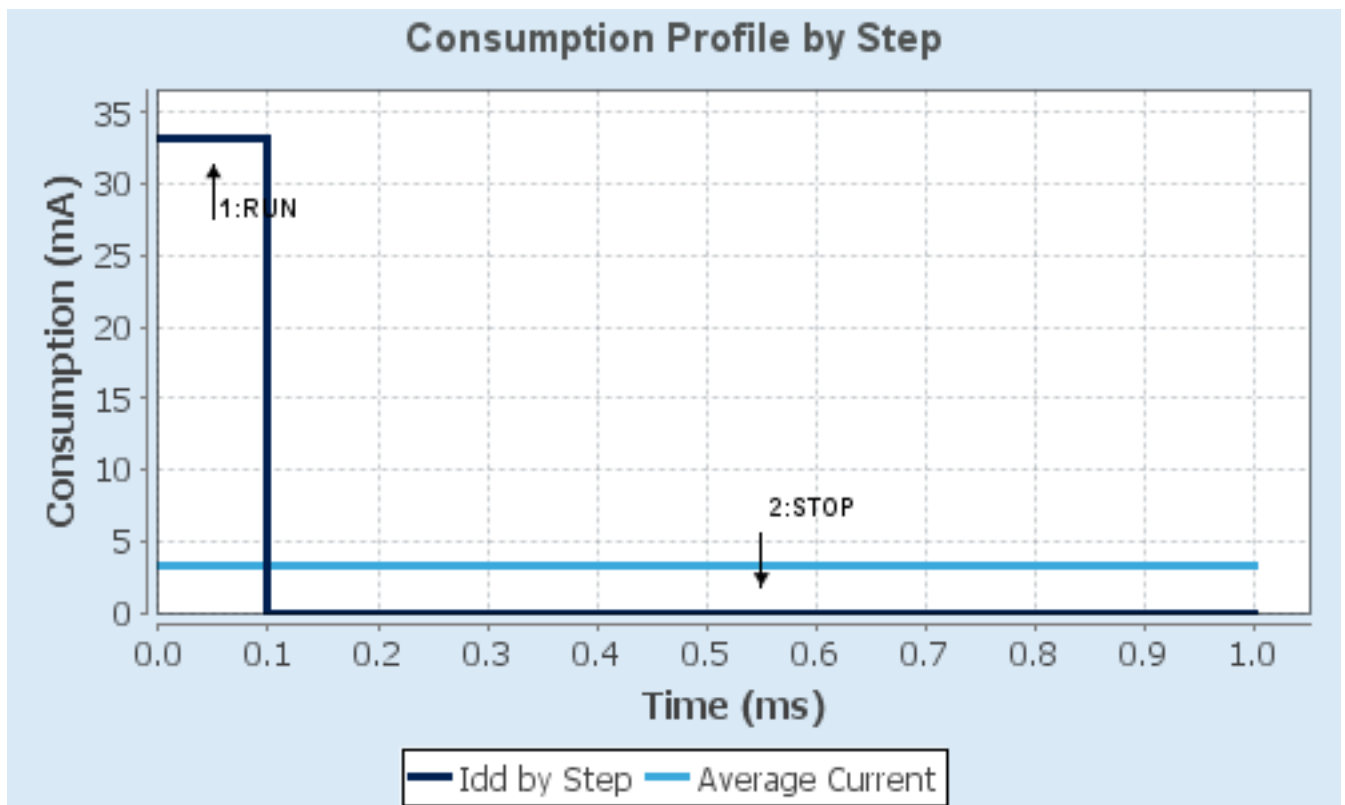

7. IPs and Middleware Configuration

7.1. GPIO

7.2. I2C3

I2C: I2C

7.2.1. Parameter Settings:

Timing configuration:

I2C Speed Mode	Standard Mode
I2C Speed Frequency (KHz)	100
Rise Time (ns)	0
Fall Time (ns)	0
Coefficient of Digital Filter	0
Analog Filter	Enabled
Timing	0x2000090E

Slave Features:

Clock No Stretch Mode	Disabled
General Call Address Detection	Disabled
Primary Address Length selection	7-bit
Dual Address Acknowledged	Disabled
Primary slave address	0

7.3. RCC

7.3.1. Parameter Settings:

System Parameters:

VDD voltage (V)	3.3
Prefetch Buffer	Enabled
Flash Latency(WS)	2 WS (3 CPU cycle)

RCC Parameters:

HSI Calibration Value	16
HSE Startup Timeout Value (ms)	100
LSE Startup Timeout Value (ms)	5000

7.4. SYS

Debug: Serial Wire

Timebase Source: SysTick

* User modified value

8. System Configuration

8.1. GPIO configuration

IP	Pin	Signal	GPIO mode	GPIO pull/up pull down	Max Speed	User Label
I2C3	PC9	I2C3_SDA	Alternate Function Open Drain	No pull up pull down *	High *	
	PA8	I2C3_SCL	Alternate Function Open Drain	No pull up pull down *	High *	
SYS	PA13	SYS_JTMS-SWDIO	n/a	n/a	n/a	
	PA14	SYS_JTCK-SWCLK	n/a	n/a	n/a	
GPIO	PA5	GPIO_Output	Output Push Pull	No pull up pull down	Low	LED2

8.2. DMA configuration

nothing configured in DMA service

8.3. NVIC configuration

Interrupt Table	Enable	Preenmption Priority	SubPriority
Non maskable interrupt	true	0	0
Hard fault interrupt	true	0	0
Memory management fault	true	0	0
Pre-fetch fault, memory access fault	true	0	0
Undefined instruction or illegal state	true	0	0
System service call via SWI instruction	true	0	0
Debug monitor	true	0	0
Pendable request for system service	true	0	0
System tick timer	true	0	0
PVD interrupt through EXTI line 16	unused		
Flash global interrupt	unused		
RCC global interrupt	unused		
I2C3 event interrupt / I2C3 wake-up interrupt through EXTI line 27	unused		
I2C3 error interrupt	unused		
Floating point unit interrupt	unused		

* User modified value

9. Predefined Views - Category view : Current

Middleware

System Core

Analog


Timers

Connectivity

Multimedia

Computing

DMA

I2C3 

GPIO 

NVIC 

RCC 

SYS 

10. Software Pack Report