



AUTOMATIC TRANSMISSION CONTROL SYSTEM


0513-a

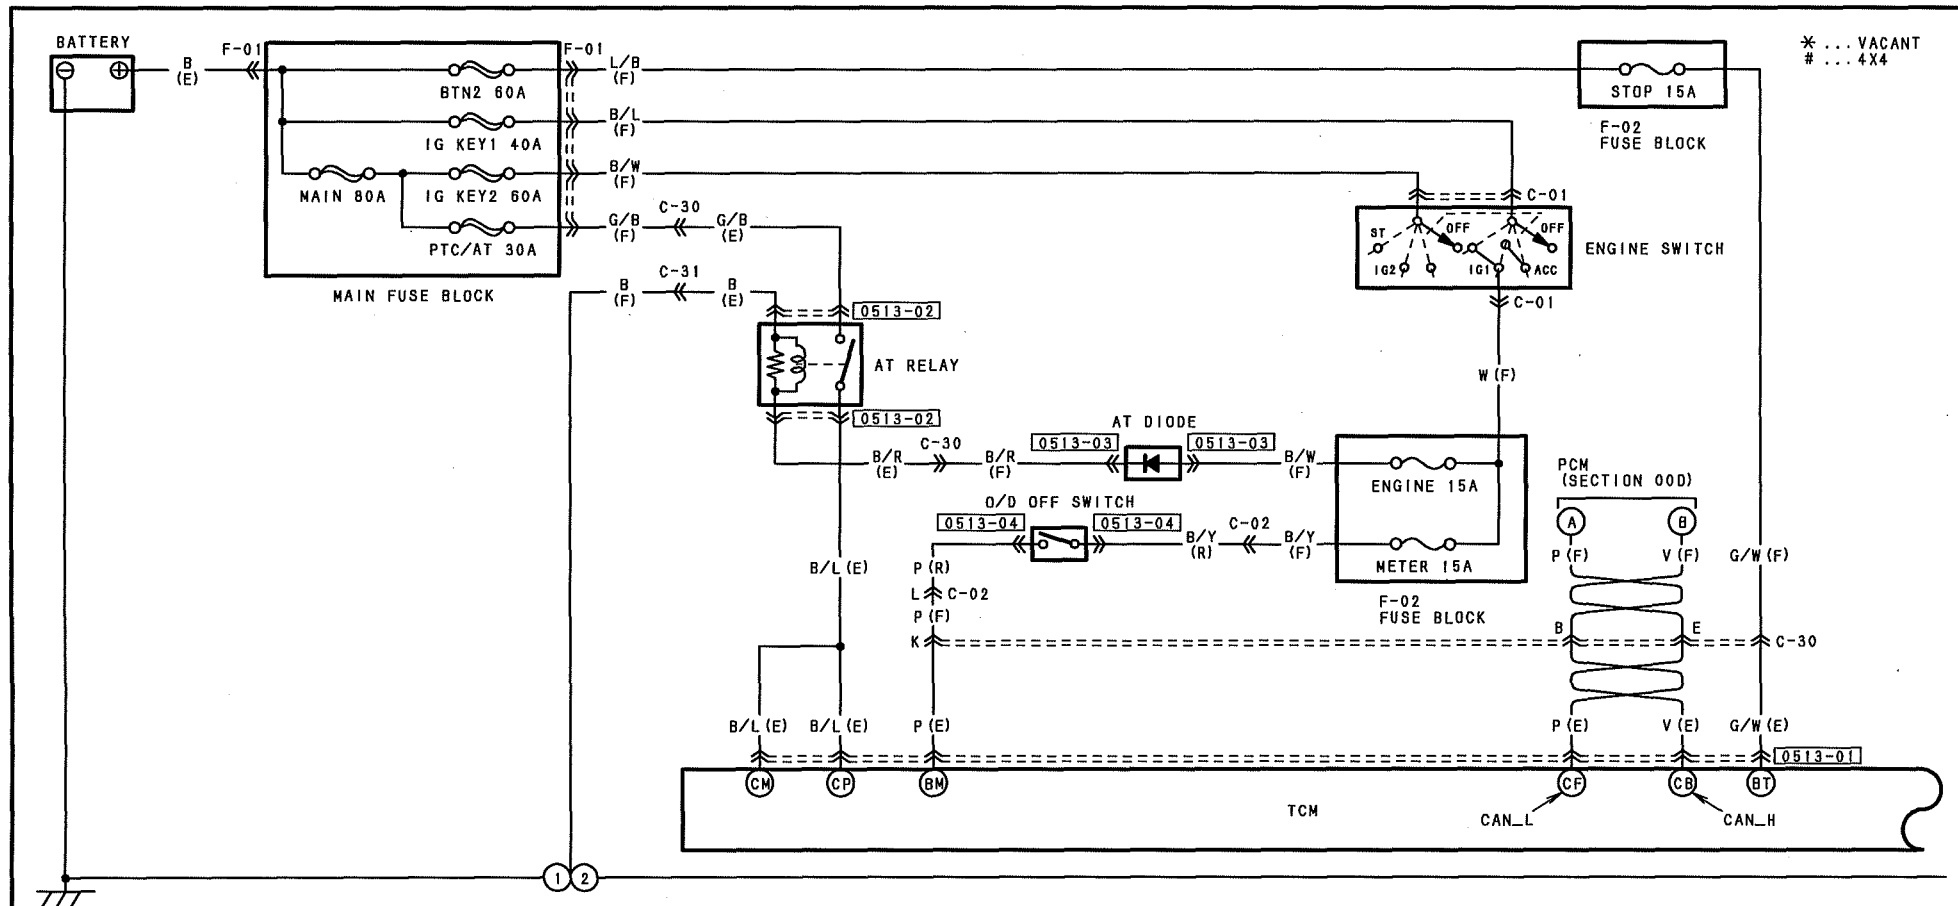

0513-01 TCM (E)

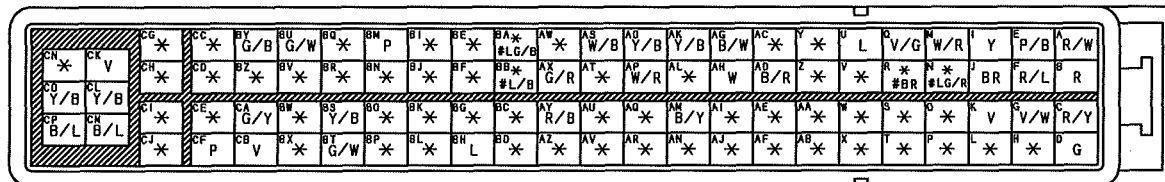

0513-02 AT RELAY (E)




0513-03 AT DIODE (F)



0513-04 O/D OFF SWITCH (R)



HARNESS SYMBOL:  (F)  (E)  (R)

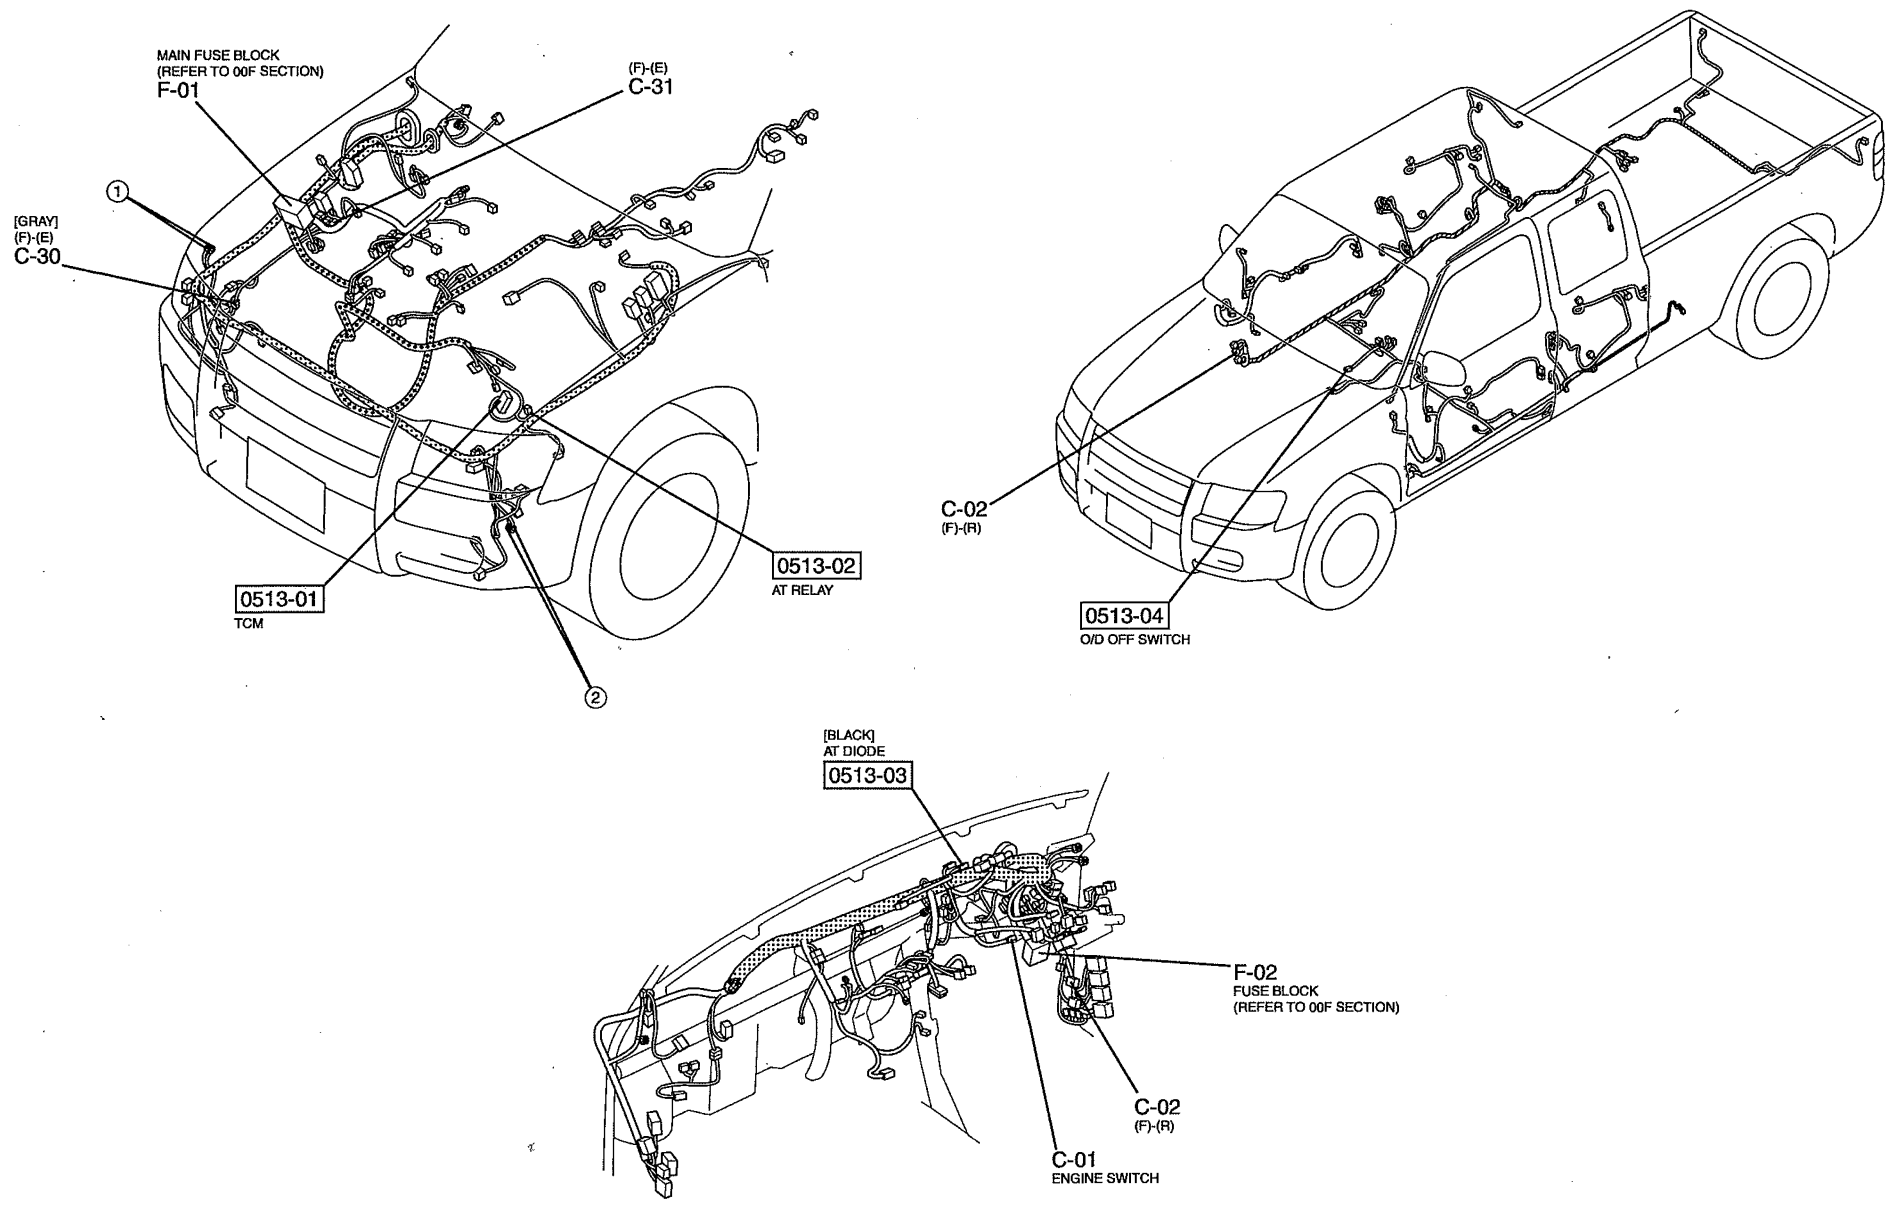


05 TRANSMISSION/TRANSAXLE
13 AUTOMATIC TRANSMISSION

0513-a

59B

59C


0513-b

[illegible]

33

84 85


A diagram of a 16-pin DIP package. The package is rectangular with pins on all four sides. The top pin is labeled '16' and the bottom pin is labeled '1'. The package is divided into two halves by a vertical line. The left half is labeled 'W' and the right half is labeled 'W/R'. The package is labeled 'B' on the left and 'A' on the right.

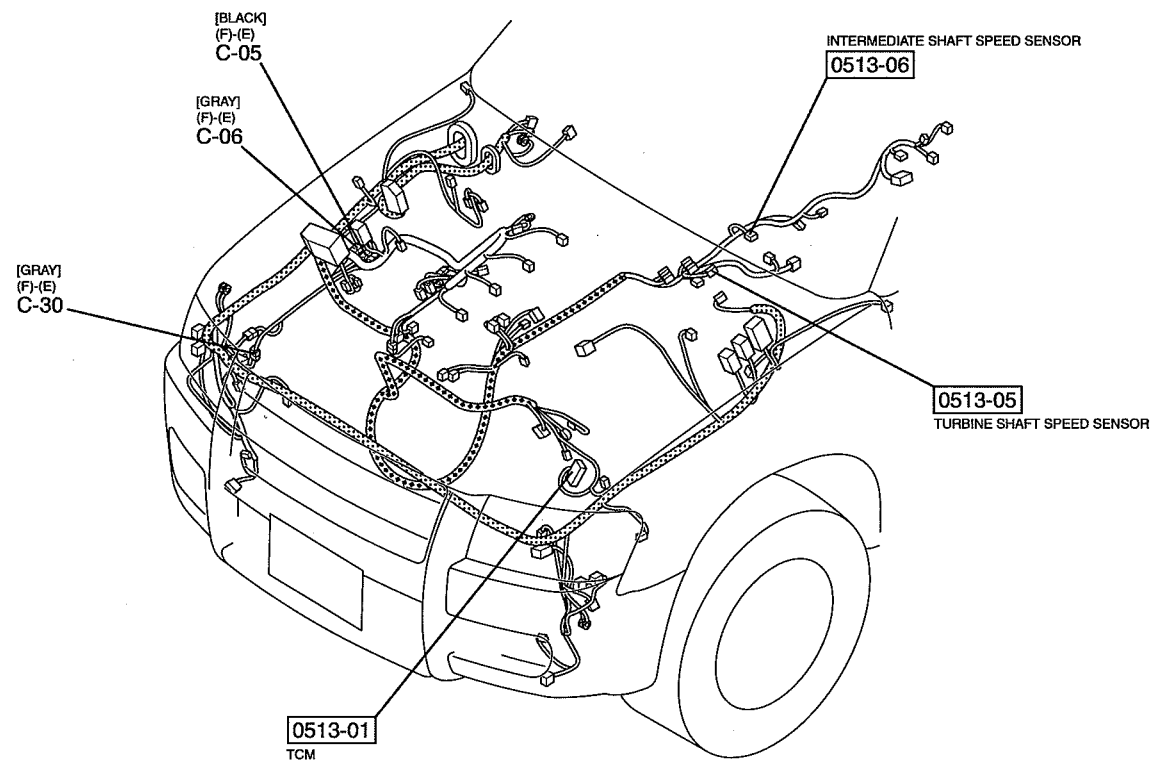


AUTOMATIC TRANSMISSION CONTROL SYSTEM

0513-c

* ... VACANT
... 4X4

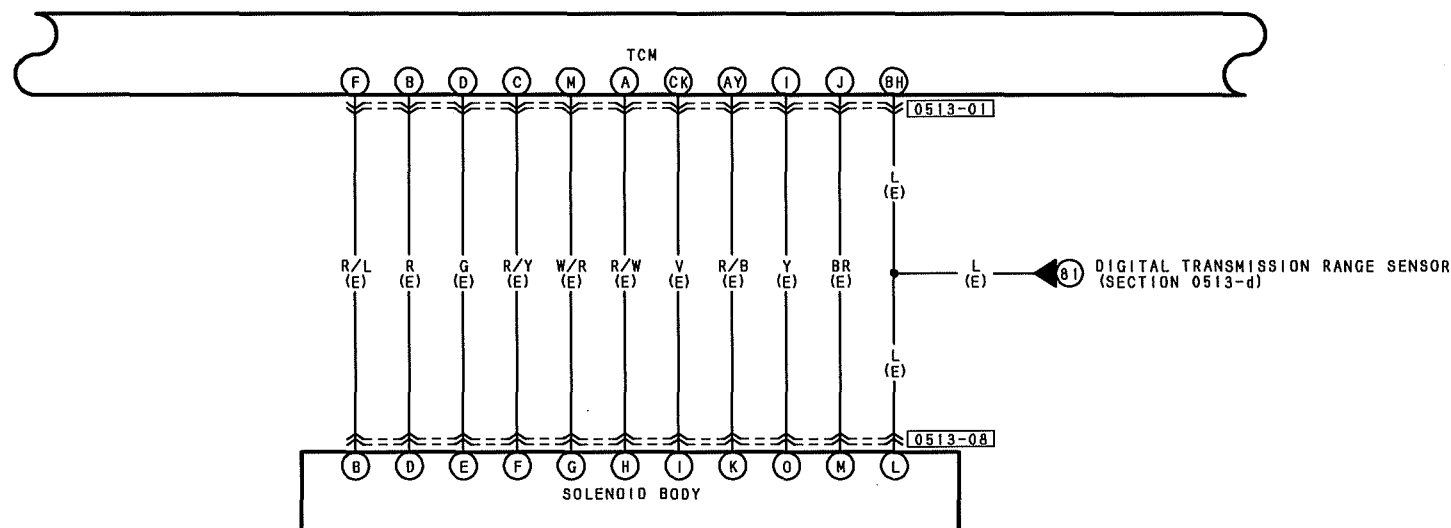


0513-01 TCM (E)

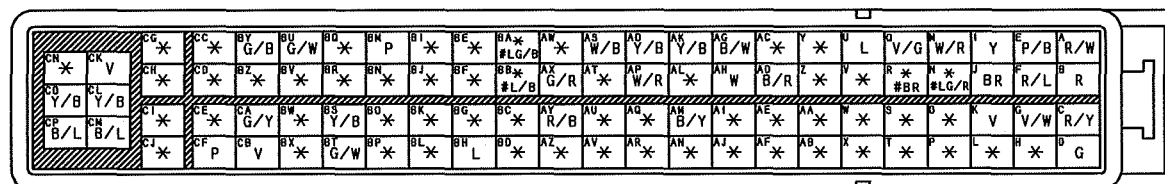


33

84 85

0513-08 SOLENOID BODY (E)

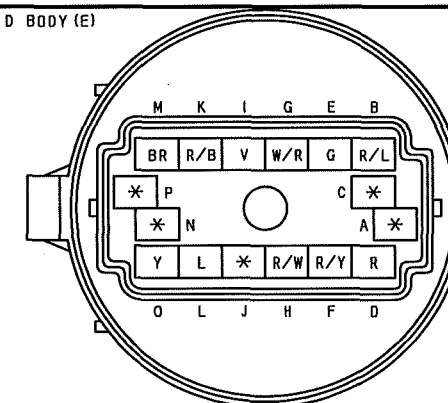

59F

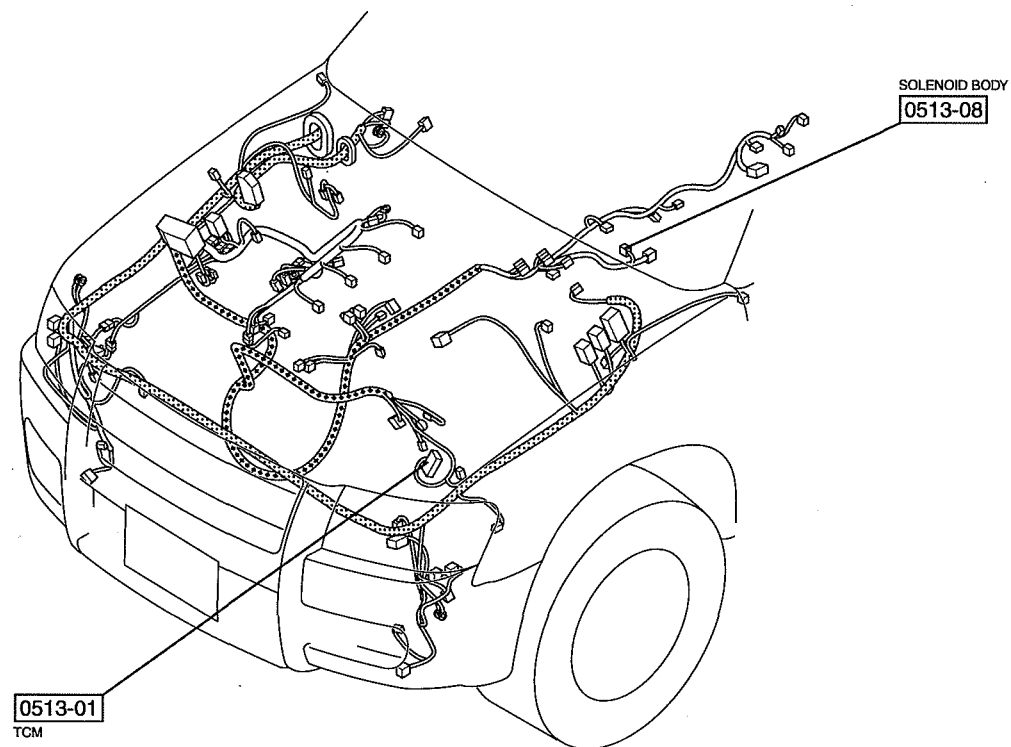


05 TRANSMISSION/TRANSAXLE
13 AUTOMATIC TRANSMISSION

0513-c


AUTOMATIC TRANSMISSION CONTROL SYSTEM

0513-d

* ... VACANT
... 4X4

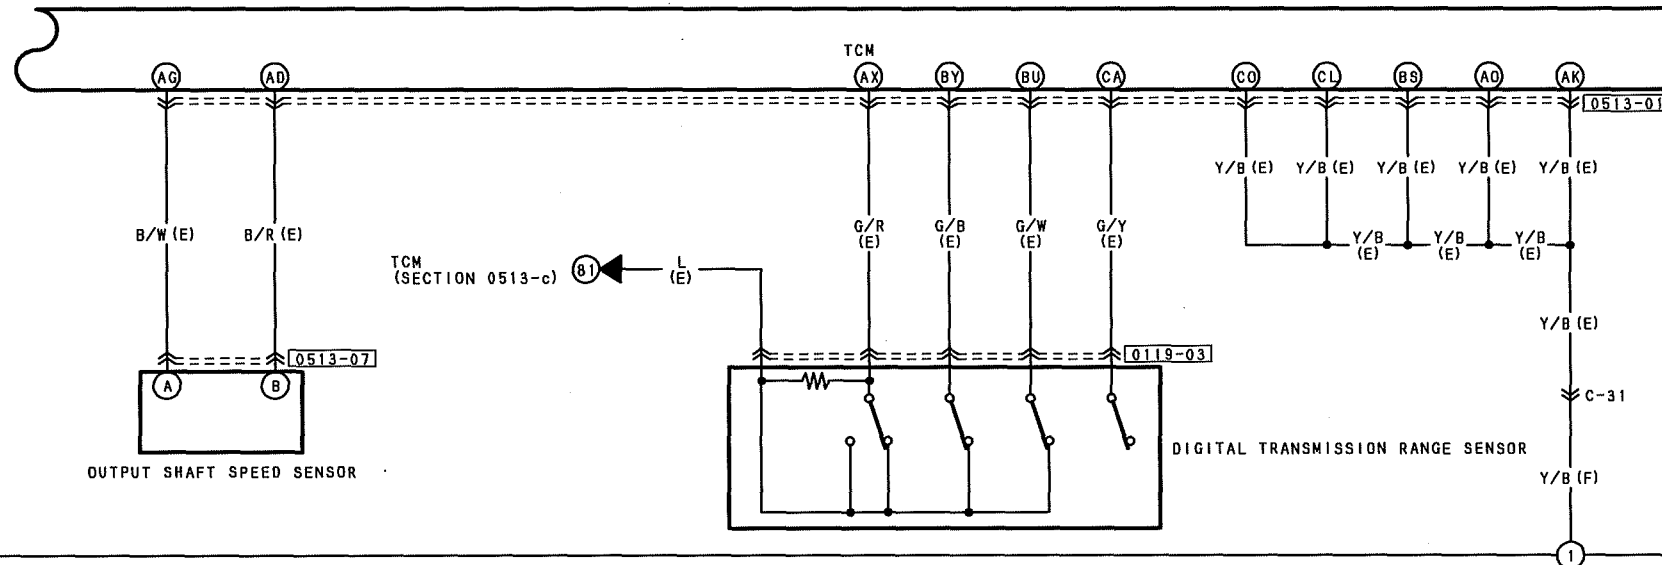

0513-01 TCM (E)

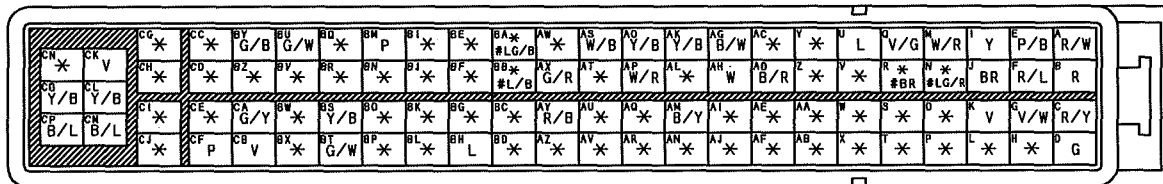


3 4
1 2


33

84 85

0513-07 OUTPUT SHAFT SPEED SENSOR (E)




0119-03 DIGITAL TRANSMISSION RANGE SENSOR (E)

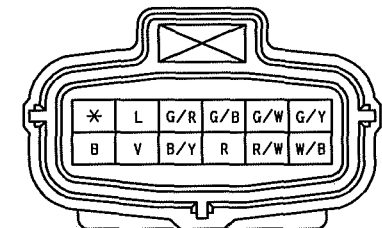

59G

59H

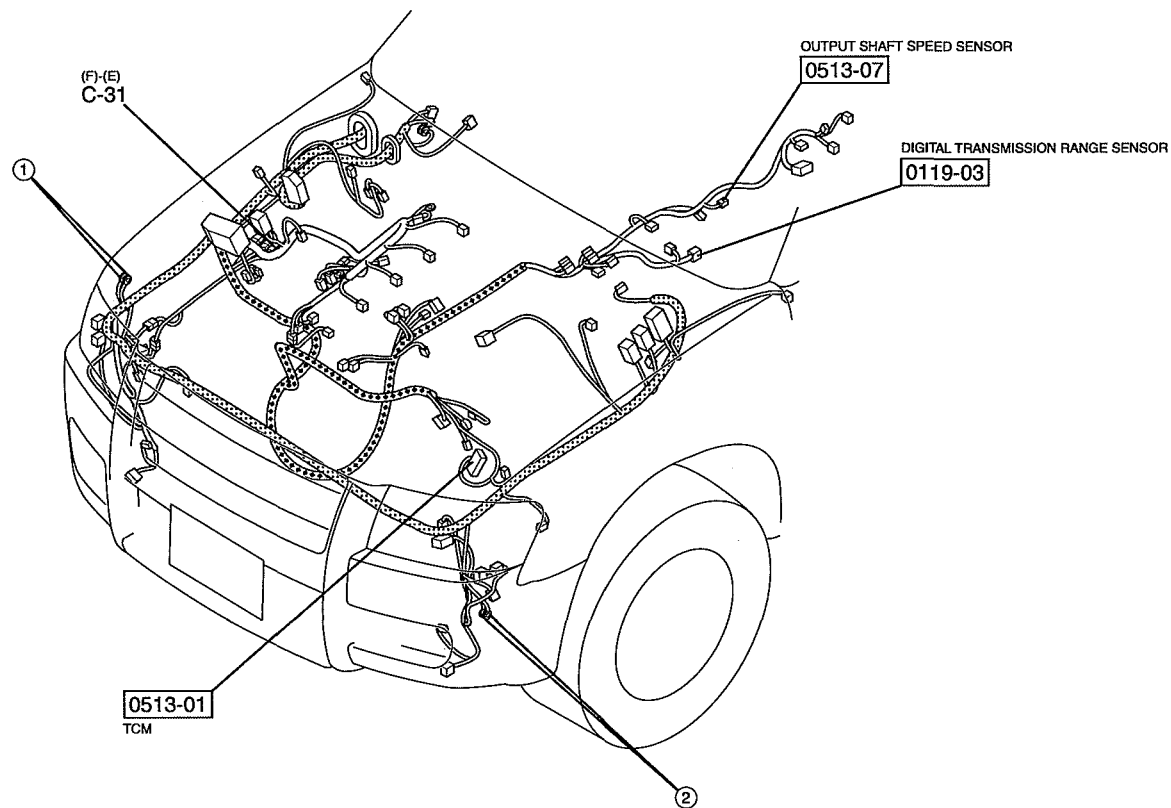

05 TRANSMISSION/TRANSAXLE
13 AUTOMATIC TRANSMISSION

0513-d