

01-12B COOLING SYSTEM [WL-C, WE-C]

COOLING SYSTEM OUTLINE

[WL-C, WE-C].....	01-12B-1
COOLING SYSTEM STRUCTURAL	
VIEW [WL-C, WE-C].....	01-12B-1
COOLING SYSTEM	
FLOW DIAGRAM [WL-C, WE-C]	01-12B-2

RADIATOR, COOLING SYSTEM CAP

CONSTRUCTION [WL-C, WE-C].....	01-12B-2
THERMOSTAT CONSTRUCTION/	
OPERATION [WL-C, WE-C].....	01-12B-3
WATER PUMP CONSTRUCTION/	
OPERATION [WL-C, WE-C].....	01-12B-3
COOLING FAN CONSTRUCTION	
[WL-C, WE-C].....	01-12B-4

COOLING SYSTEM OUTLINE [WL-C, WE-C]


dcf011200000104

Features

Reduced weight	• Down flow type radiator with aluminum core and plastic tank adopted
Miniaturization	• Built-in type water pump adopted
Reduced noise	• Thermo-modulation type cooling fan adopted
Improved serviceability	• Longer-life new engine coolant (type FL22) adopted


COOLING SYSTEM STRUCTURAL VIEW [WL-C, WE-C]

dcf011200000105

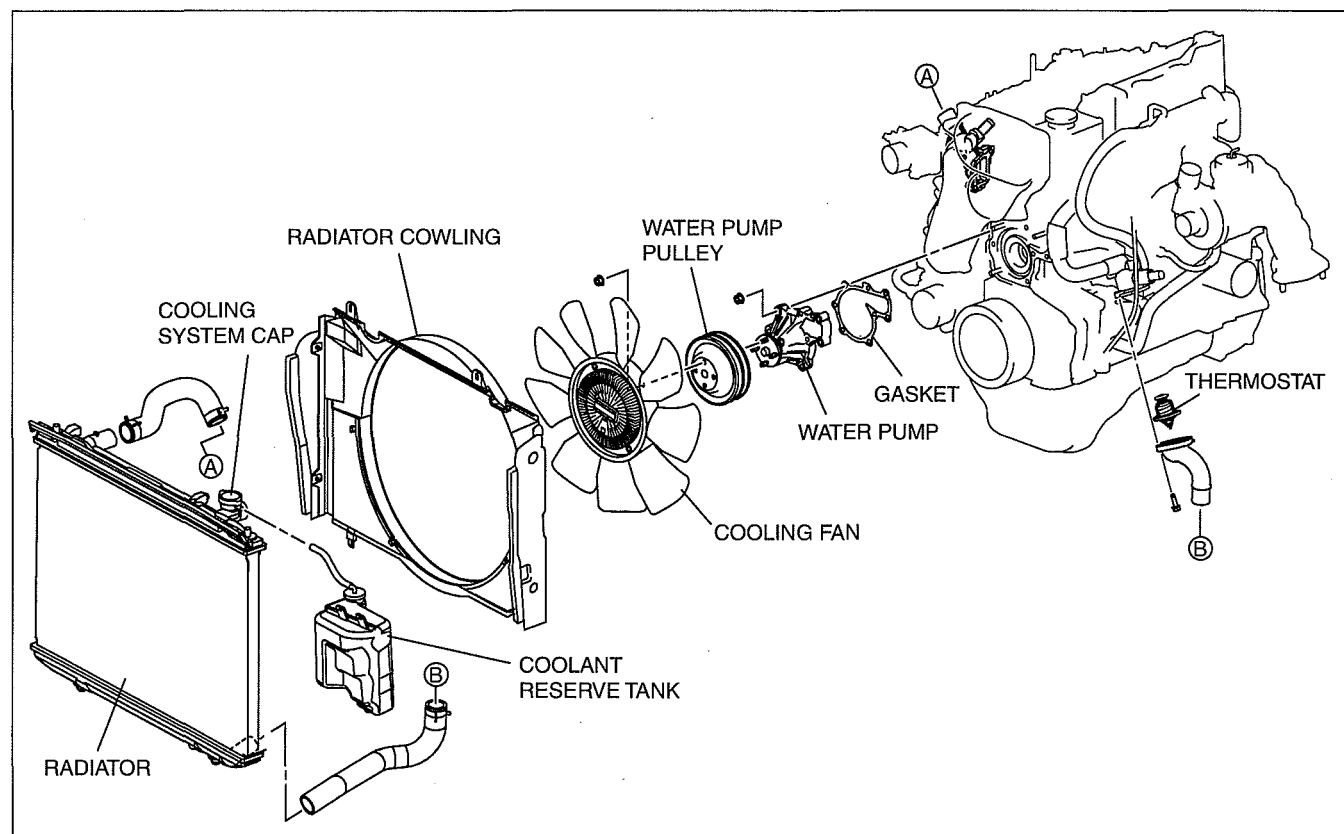

DCG112ZTB005

dcf011200000t06

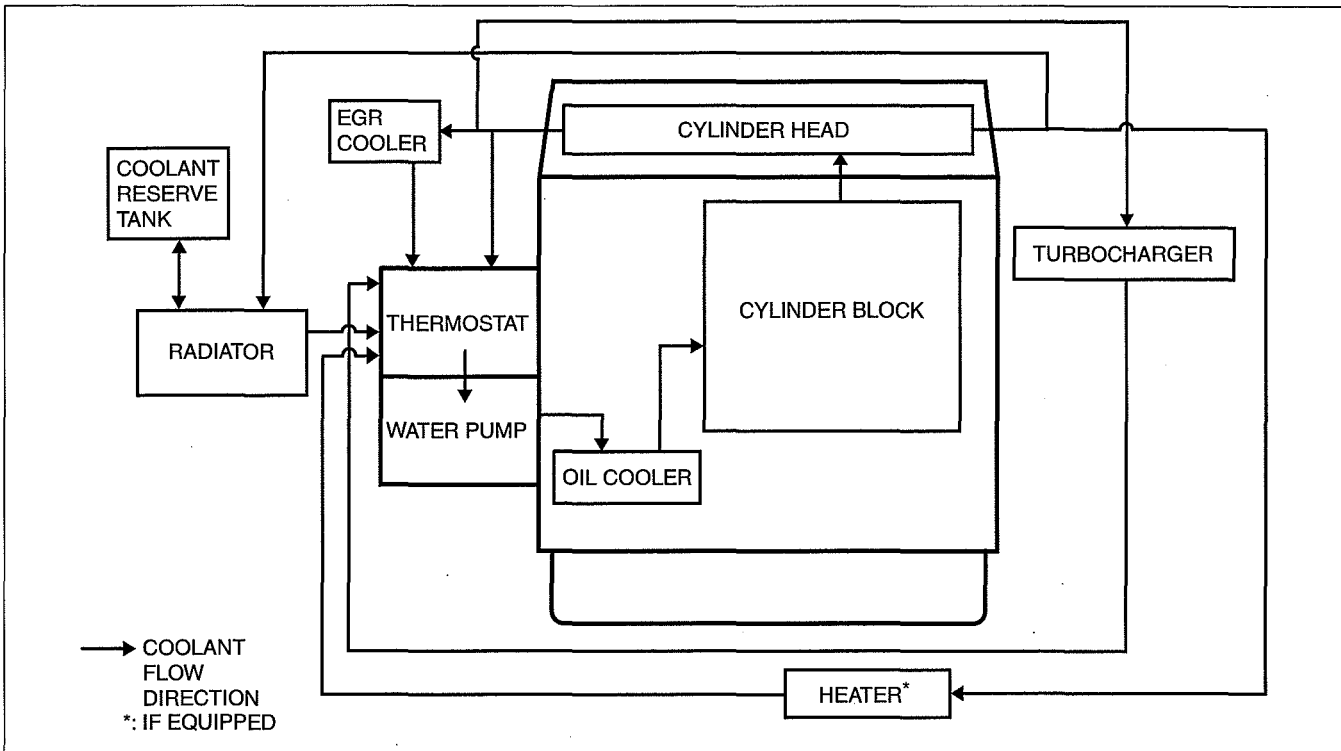

arnffn00000142


RADIATOR, COOLING SYSTEM CAP CONSTRUCTION [WL-C, WE-C]

dcf011215200t02

A corrugated fin type radiator has been adopted. The radiator tanks are made of plastic and the core is made of aluminum for weight reduction. The down-flow direction of water inside the radiator causes air to bleed from the cooling system easier.

Four mounting rubbers are utilized to decrease vibration.

A low-pressure type cap has been adopted for the cooling system. It is installed on the radiator.

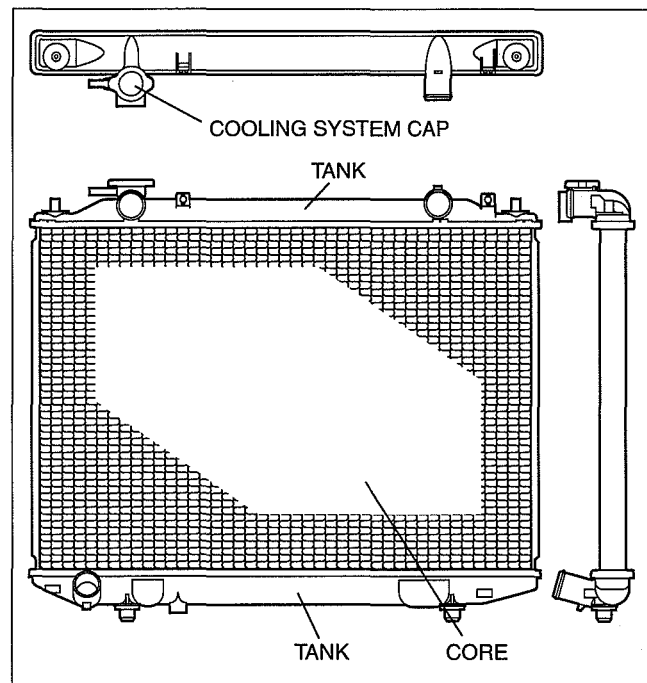

DCG112ZTB001

COOLING SYSTEM [WL-C, WE-C]

THERMOSTAT CONSTRUCTION/OPERATION [WL-C, WE-C]


dcf011215171t02

Construction

- A wax-type thermostat with a jiggle-pin has been adopted.
- The thermostat body is made of stainless steel with excellent corrosion resistance.

Operation

- When the engine coolant temperature reaches 80—84 °C {176—183 °F}, the valve starts opening to allow engine coolant to flow from the radiator stabilizing the engine coolant temperature. When the engine coolant temperature decreases to approx. 77 °C {171 °F}, the valve closes to stop the engine coolant flow from the radiator.

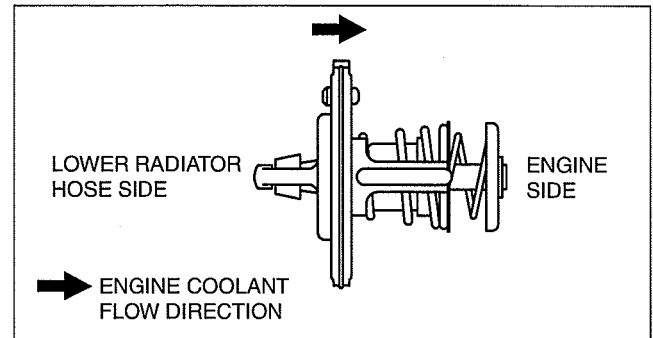


DCG112ZTB002

WATER PUMP CONSTRUCTION/OPERATION [WL-C, WE-C]

dcf011215010t02

Construction

- The aluminum alloy water pump with the impeller built into the cylinder block has been adopted for size reduction.
- A highly reliable integrated water seal has been adopted.
- The water pump is not serviceable and must be replaced as a single unit if it has a malfunction.

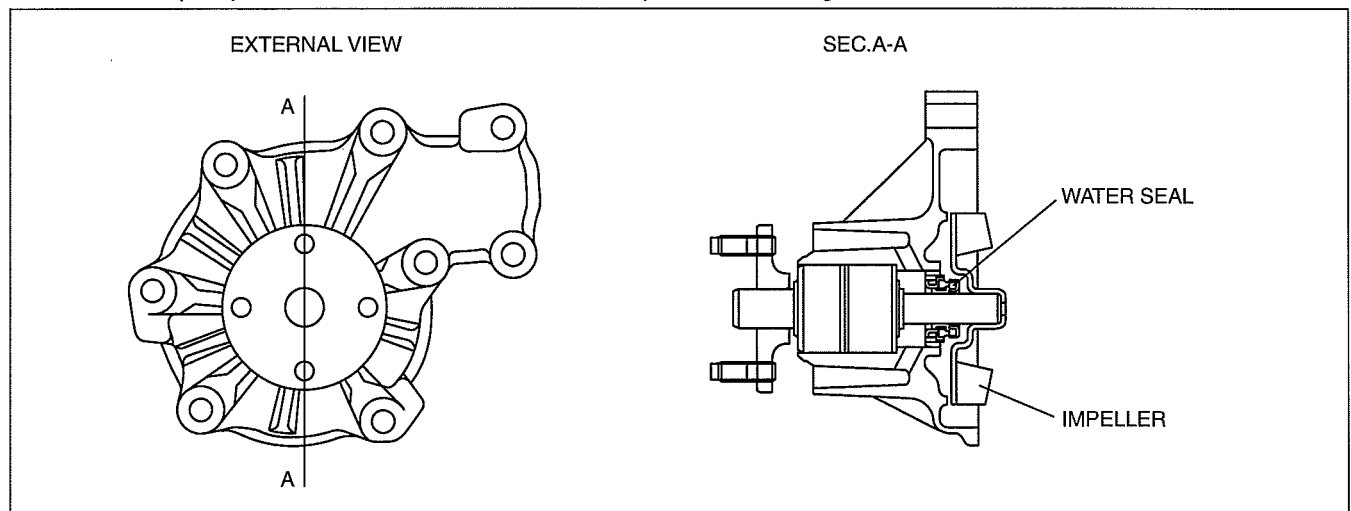

DCG112ZTB003

Operation


- The water pump is driven by the drive belt.

COOLING SYSTEM [WL-C, WE-C]

COOLING FAN CONSTRUCTION [WL-C, WE-C]

dcf011215140t02

- A thermo-modulation type cooling fan has been adopted which operates the cooling fan only when necessary. Due to this, the following effects have been obtained.
 - Reduced noise
 - Improved heating performance
 - Rapid engine warming-up
- The cooling fan consists of the fan blades and fan drive.
- Noise (wind noise) which occurs during fan operation has been reduced due to the nonuniform positioning of the fan blades.
- The fan blades are made of plastic for weight reduction.
- The cooling fan is driven by the drive belt.

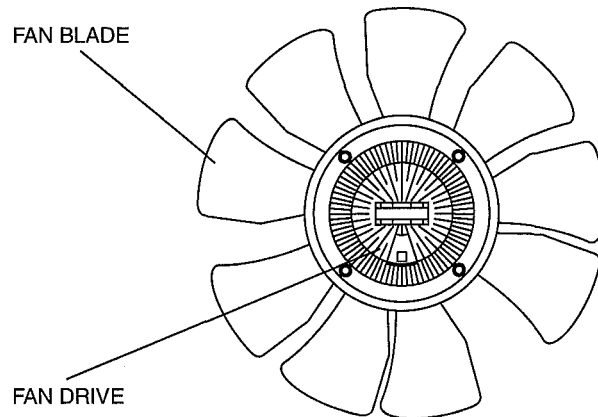

DCG112ZTB004

Cooling fan specification

Item	Specification
Type	Thermo-modulation type
Number of blades	9
Outer diameter	450 {17.7}