



# ESP32-GATEWAY

## User Manual

Document revision 2.0, October 2024

[www.olimex.com](http://www.olimex.com)

## Table of Contents

1. What is ESP32-GATEWAY.....	3
1.1 ESP32-GATEWAY variants.....	4
1.2 Board use requirements.....	4
1.3 ESP32-GATEWAY Open Source Licenses.....	5
2. ESP32-GATEWAY general layout.....	6
3. ESP32-GATEWAY power supply and consumption.....	7
4. ESP32-GATEWAY schematics and dimensions.....	8
5. ESP32-GATEWAY pinout description:.....	8
6. ESP32-GATEWAY software installation.....	9
7. Document revision history.....	9

# 1. What is ESP32-GATEWAY

ESP32-GATEWAY is a mature Open Source Hardware development board that incorporates an ESP32 module. The ESP32-GATEWAY board is designed and manufactured by Olimex, while the ESP32 module is designed and manufactured by Espressif systems. The ESP32 modules are extremely popular WIFI/BT modules due to their size, price, and very good documentation.

The ESP32-GATEWAY board has the following features:

- ESP32-WROOM-32E or ESP32-WROOM-32UE module with WiFi, BLE connectivity
- USB type C connector for powering and programming with CH340 USB serial converter
- Ethernet 100Mb interface with LAN8710A driver
- MicroSD card
- Reset button
- User button
- Power status LED
- User LED
- GPIO 20 pin connector with all ESP32 ports
- Dimensions: (50 x 62)mm ~ (1.95 x 2.45)"
- Optional external antenna (-EA)
- Industrial grade -40+85C version available (-IND)

## 1.1 ESP32-GATEWAY variants

The board has 4 variants – ESP32-GATEWAY, ESP32-GATEWAY-EA, ESP32-GATEWAY-EA-IND, ESP32-GATEWAY-IND. The base variant ESP32-GATEWAY works in commercial temperature range (0-70 degrees C) and has on-module antenna.

ESP32-GATEWAY and ESP32-GATEWAY-IND come with ESP32-WROOM-32E module;

ESP32-GATEWAY-EA and ESP32-GATEWAY-EA-IND come with ESP32-WROOM-32UE and external antenna;

ESP32-GATEWAY and ESP32-GATEWAY-EA work in the commercial temperature range 0-70C;

ESP32-GATEWAY-IND and ESP32-GATEWAY-EA-IND have all components rated for operating in the industrial temperature range -40+85C.

## 1.2 Board use requirements

You only need a fitting USB cable and a personal computer. The latest hardware revision of the board requires USB type C connector. Usually only such cable is required:

<https://www.olimex.com/Products/Components/Cables/USB-CABLE-A-TO-C-1M/>

Notice that older hardware revisions came with USB micro connector and require USB micro cable.

The computer needs software compatible with ESP32 modules. Most commonly used tools are ESP-IDF and Arduino IDE with ESP32 package. You can use ESP32-GATEWAY with any software tool that supports the main ESP32 module.

## 1.3 ESP32-GATEWAY Open Source Licenses

ESP32-GATEWAY is Open Source Hardware, listed in OSHWA.org here:


<https://certification.oshwa.org/bg000012.html>

The hardware files are released under [CERN OSHW](#) license.

The software is released under [GPL 3 license](#).

The documentation is released under [CC BY-SA 3.0](#) license.

## 2. ESP32-GATEWAY general layout

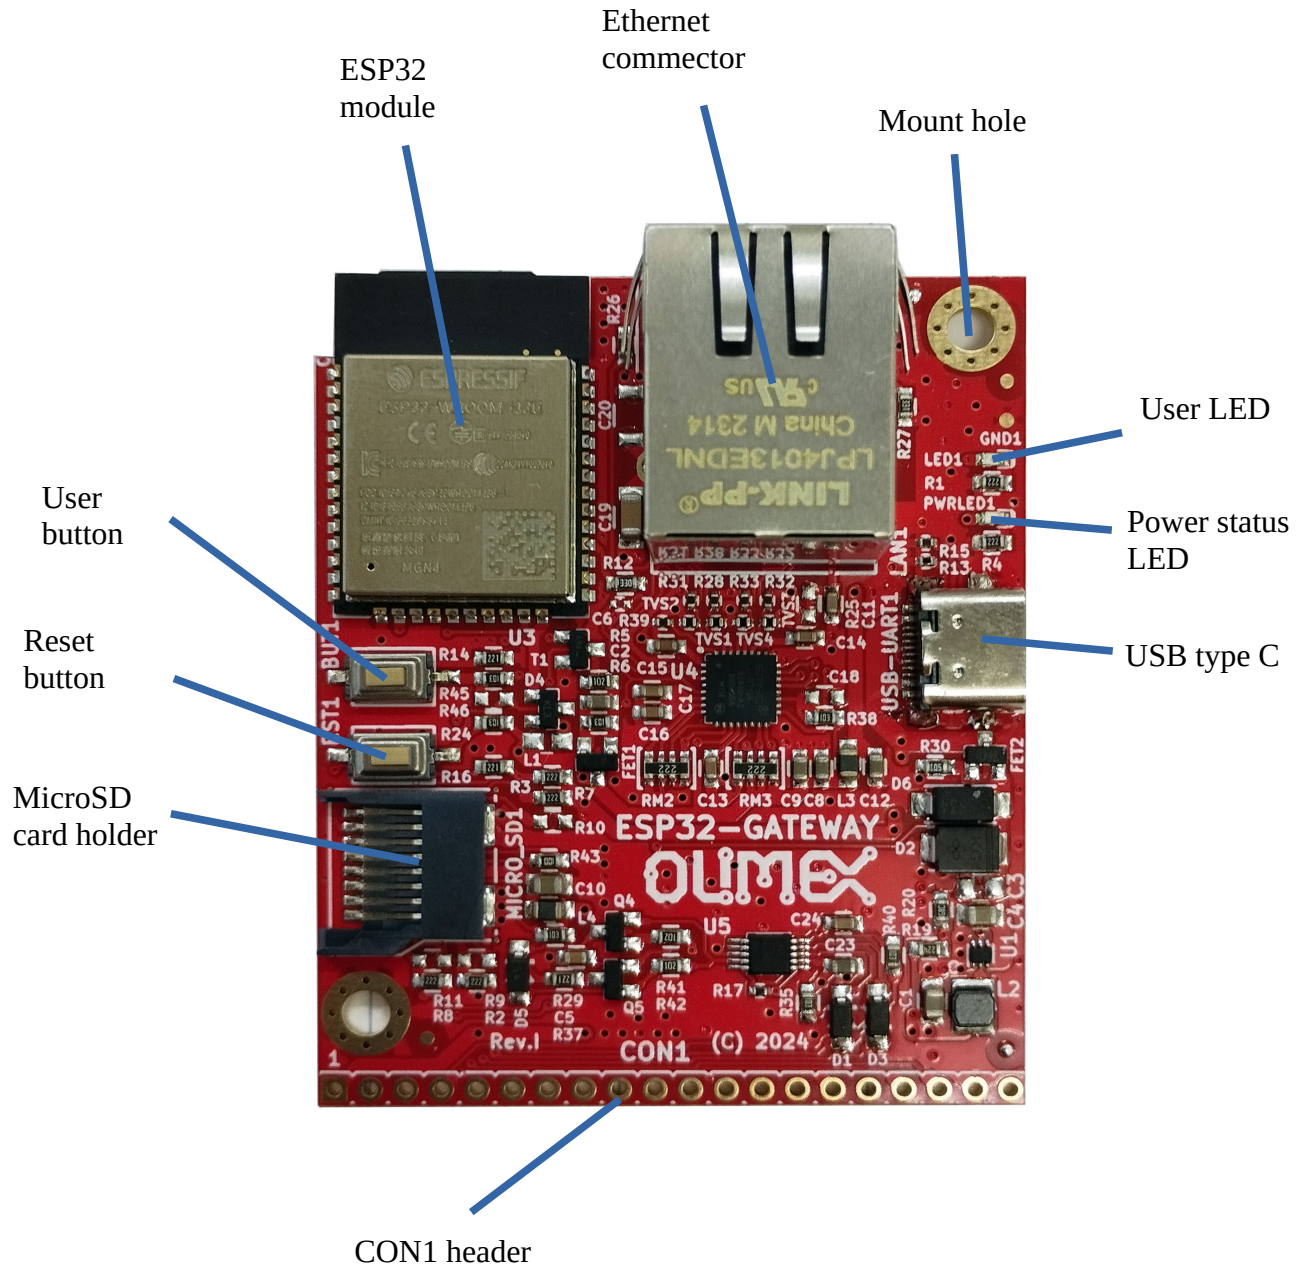

### **3. ESP32-GATEWAY power supply and consumption**

ESP32-GATEWAY typically consumes around 50mA of current depending on the software. The board can consume much less using the power saving modes.

The absolute maximum power ESP32-GATEWAY can draw from the power supply would be the determined by the maximum input of the regulator on the power input line. Of course, consider that on-board peripherals and the main module would use some of that current. When you power the board from either the USB or the +5V pin of the CON1 header –> the regulator is TPS62A02ADRLR can output maximum 2000mA continuously.

## 4. ESP32-GATEWAY schematics and dimensions

ESP32-GATEWAY was designed with KiCAD (free and open-source CAD tool). ESP32-GATEWAY schematics and sources can be found at GitHub here:

<https://github.com/OLIMEX/ESP32-GATEWAY/tree/master/HARDWARE>

There are also PDF exports if you don't want to install KiCAD.

Board dimensions can be found here:

<https://www.olimex.com/Products/IoT/ESP32/ESP32-GATEWAY/resources/ESP32-GATEWAY-general-dim.png>

## 5. ESP32-GATEWAY pinout description:

The board's pinout can be seen here:

<https://www.olimex.com/Products/IoT/ESP32/ESP32-GATEWAY/resources/ESP32-GATEWAY-GPIOs-Rev.F-up.pdf>

The ESP32 chip has very good multiplexer so you can set the free GPIO pins for alternative functions via software means.

The SD card interface is in 1-bit eMMC mode.



## 6. ESP32-GATEWAY software installation

Espressif guide for [Arduino IDE installation](#) – after installation – there is own entry for the board, it should be listed as OLIMEX ESP32-GATEWAY in the board selection

Espressif [ESP-IDF installation](#)

Espressif guide for [PlatformIO installation](#).

Olimex provides some ESP-IDF and Arduino examples here:

<https://github.com/OLIMEX/ESP32-GATEWAY/tree/master/SOFTWARE>

## 7. Document revision history

Revision 2.0 October 2024

- Hardware design changed – main changes are USB connector now USB type C and Ethernet clock routing improved, jumpers added at bottom

Revision 1.0 August 2024