

MIXED FLOW IN-LINE DUCTED FANS FOR RESIDENTIAL AND COMMERCIAL SITE

KINAIR Mixed Flow In-line Ducted Fans have plastic housing, high efficient motor, quiet wind wheel and are durable.







FEATURES

- High quality motor, run out only 0.35 mm
- Stronger air volume and static pressure
- Optional: 2 speeds


BODY STRUCTURE



PERFORMANCE CURVE

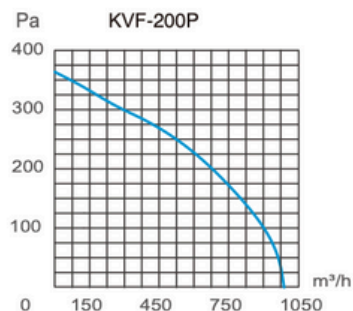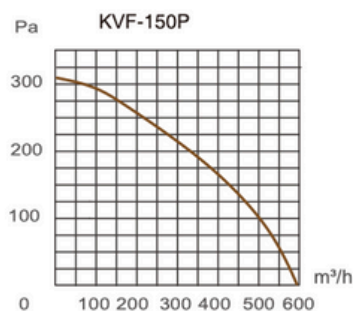

UNIT SIZE AND PARAMETERS

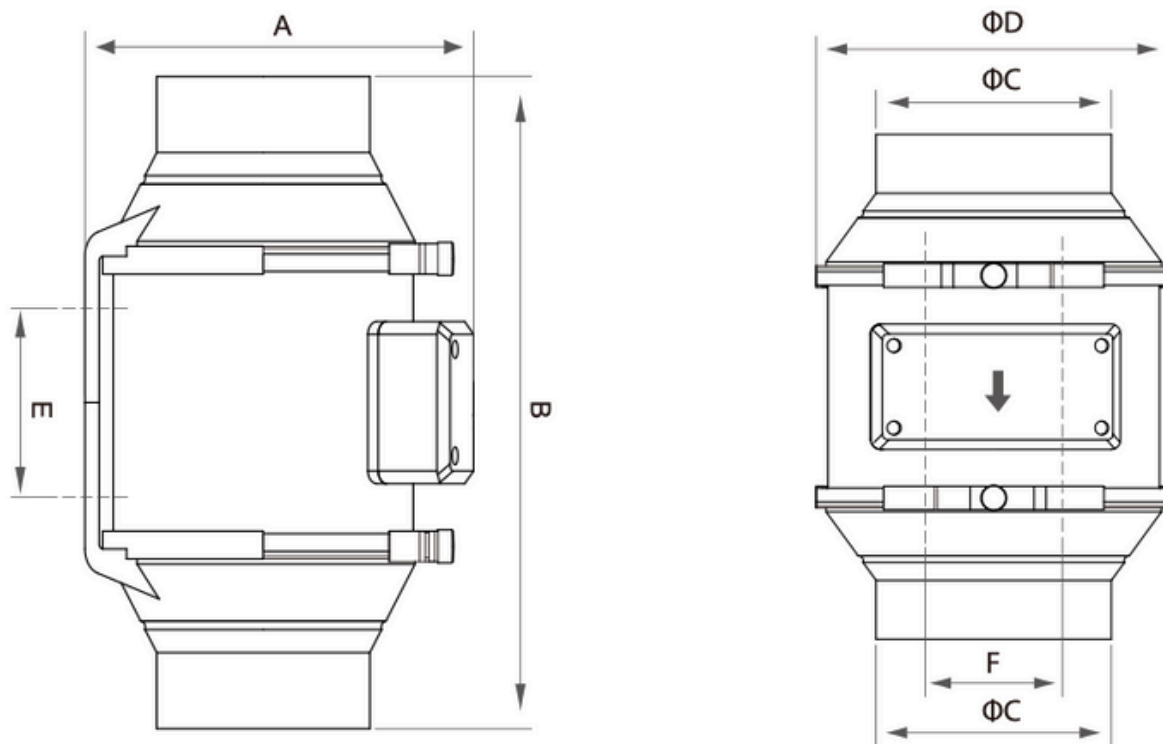

Unit: mm

Model	A	B	C	D	E (Installation dimensions)	F (Installation dimensions)
KVF-100P	215	257	100	177	59.5	79.5
KVF-125P	215	257	121	177	59.5	79.5
KVF-150P	243	302	147	202	59.5	93
KVF-200P	270	300	197	220	85	113
KVF-250P	350	378	247	290	115	230

Model	Voltage/ Frequency	Input Power		Air Volume		Noise		Static Pressure		Rotation Speed		Duct Dimension	Net Weight	Gross Weight	Applicable Area	Package Size
	(V/Hz)	(W)		(m³/h)		(dB)		(Pa)		(rpm)		(mm)	(kg)	(kg)	(m²)	(mm)
		H	L	H	L	H	L	H	L	H	L					
KVF-100P	220V/50Hz	28	25	275	210	32	26	163	136	2200	1680	Φ100	1.4	1.89	10-15	280x205x245
KVF-125P	220V/50Hz	30	26	385	310	34	27	168	148	2200	1750	Φ125	1.4	1.89	18-22	280x205x245
KVF-150P	220V/50Hz	46	42	590	500	42	37	315	252	2410	2100	Φ150	2.2	2.93	28-33	330x235x275
KVF-200P	220V/50Hz	117	114	1000	800	62	54	363	281	2420	2030	Φ200	3.3	4.12	38-43	315x250x305
KVF-250P	220V/50Hz	207	175	1600	1400	64	57	443	320	2500	2320	Φ250	6.9	8	48-53	390x305x378