



Model : KTAFF/2-315-6/30°-0.55kW-F400

Tube casings crafted from durable rolled Mild sheet steel, featuring corrosion resistant hot-dip galvanized finish, The variable pitch angle impeller is dynamically balanced, the Impeller made from high grade aluminum, It offers excellent strength and lightweight characteristics for efficient airflow.

F400: Certified for continuous operation at temperatures up to 400°C for 2 hours, designed for high-temperature smoke extraction in critical fire safety systems.

Duty Point

Airflow	1,500 CMH (m³/h)
Static Pressure	157 Pa
Temperature	20 °C
Altitude	0 m
Density	1.2 kg/m³

Operating Point

Airflow	1,500 CMH (m³/h)
Static Pressure	157 Pa
Dynamic Pressure	17.2 Pa
Total Pressure	174 Pa
Static Efficiency	19.2%
Total Efficiency	21.3%
Shaft Power	0.340 kW
Outlet Velocity	5.3 m/s
Fan Speed	2850 rpm
SFP	0.82 W/(l/s)

Construction

Diameter	315 mm
Blade Count	6
Blade Angle	30°
Weight	22.7 kg




Motor Characteristics

Poles	2P
Power	0.55 kW
Frequency	50 Hz
Voltage	415V
Full Load Current	1.2 A
Starting Current	6.6 A
IP Rating	IP55
Insulation	Class H
Efficiency Class	IE3
Fire Rating	F400
Brand	HAVELLS
Frame	80Z

Certifications



Performance Curves (Family)

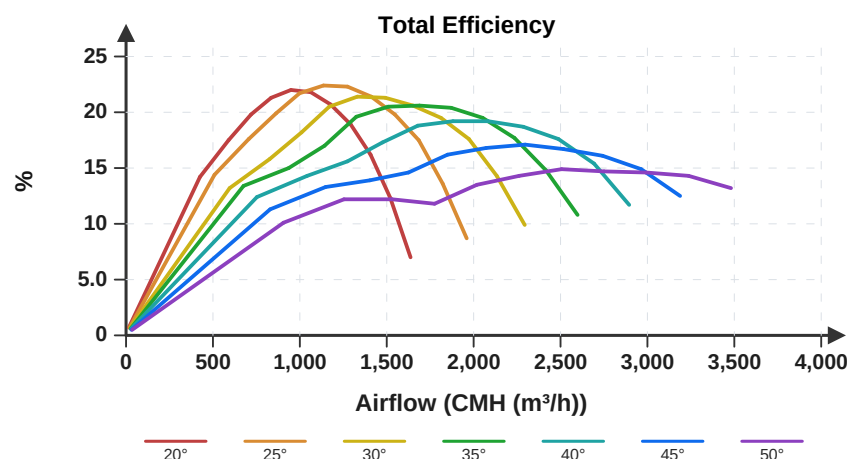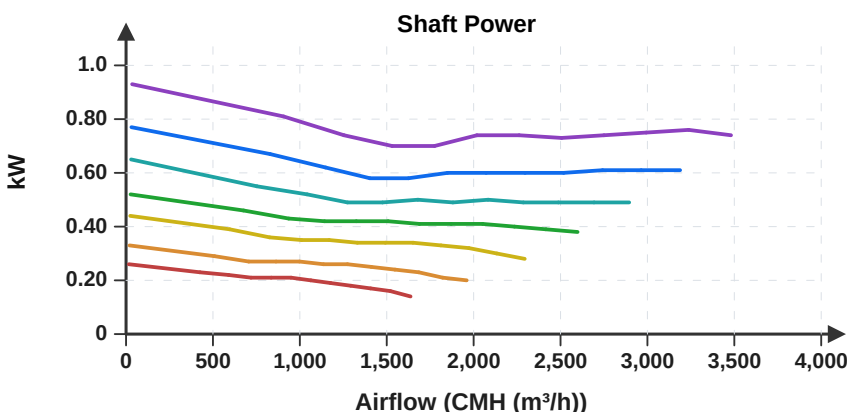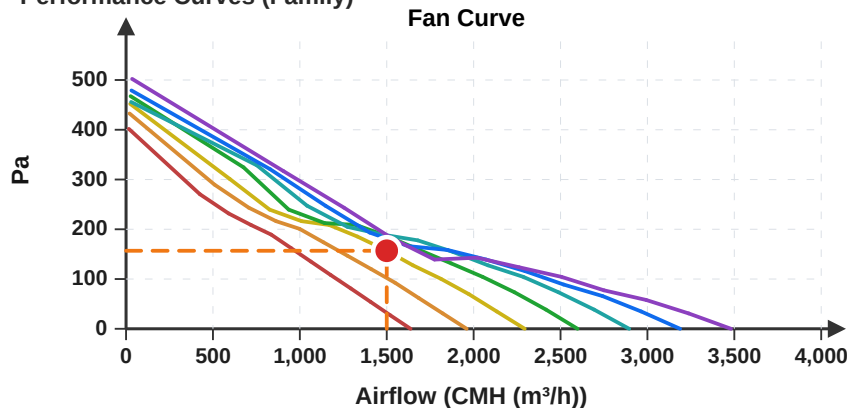




Model : KTA/2-315-6/30°-0.55kW-F400

Sound Power Level

83.3 dB(A)

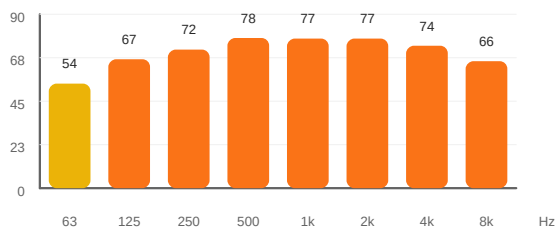


Sound Data

Frequency	Source (dB)	At 0m (dB)
63 Hz	54.1	54.1
125 Hz	66.7	66.7
250 Hz	71.7	71.7
500 Hz	77.7	77.7
1 kHz	77.4	77.4
2 kHz	77.4	77.4
4 kHz	73.7	73.7
8 kHz	65.7	65.7
Overall	83.3	83.3
NC @ 0m	-	NC-80

NC-80: Heavy industrial

Sound data is calculated and should be used as guideline only.

Technical Drawing

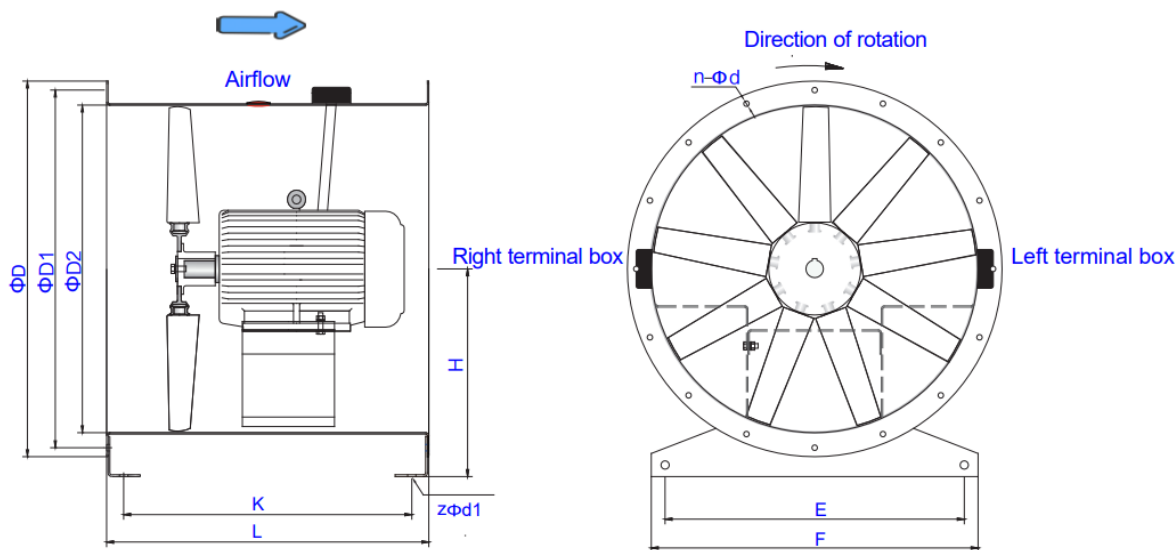

Dimensions (mm)

Size	$\Phi D2$	$\Phi D1$	ΦD	H	E	F	L	K	$n-\Phi d$	$z-\Phi d1$	Motor Max
315	320	366	398	205	265	315	400	358	8- $\Phi 10$	4- $\Phi 10$	80Z