



Model : KTAFF/2-315-6/40°-0.75kW-F400

Tube casings crafted from durable rolled Mild sheet steel, featuring corrosion resistant hot-dip galvanized finish, The variable pitch angle impeller is dynamically balanced, the Impeller made from high grade aluminum, It offers excellent strength and lightweight characteristics for efficient airflow.

F400: Certified for continuous operation at temperatures up to 400°C for 2 hours, designed for high-temperature smoke extraction in critical fire safety systems.

Duty Point

Airflow	1,000 CMH (m³/h)
Static Pressure	259 Pa
Temperature	20 °C
Altitude	0 m
Density	1.2 kg/m³

Operating Point

Airflow	1,000 CMH (m³/h)
Static Pressure	259 Pa
Dynamic Pressure	7.6 Pa
Total Pressure	267 Pa
Static Efficiency	13.7%
Total Efficiency	14.1%
Shaft Power	0.524 kW
Outlet Velocity	3.6 m/s
Fan Speed	2850 rpm
SFP	1.89 W/(l/s)

Construction

Diameter	315 mm
Blade Count	6
Blade Angle	40°
Weight	22.7 kg




Motor Characteristics

Poles	2P
Power	0.75 kW
Frequency	50 Hz
Voltage	415V
Full Load Current	1.6 A
Starting Current	10.4 A
IP Rating	IP55
Insulation	Class H
Efficiency Class	IE3
Fire Rating	F400
Brand	HAVELLS
Frame	80Z

Certifications



Performance Curves

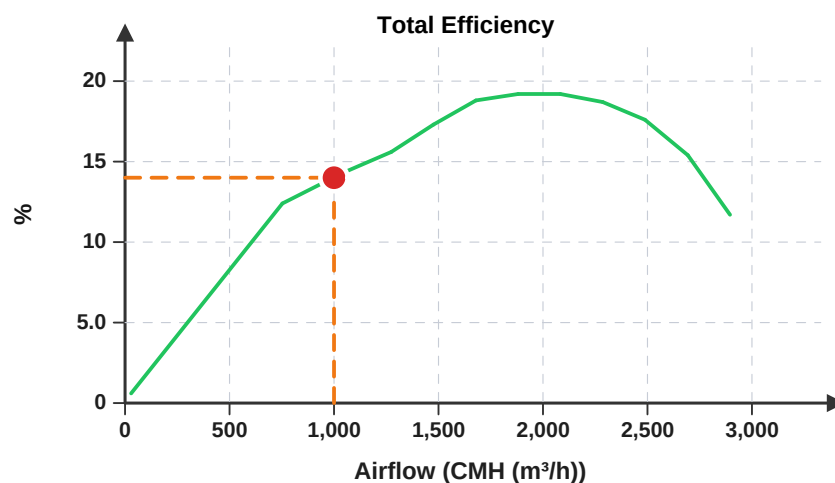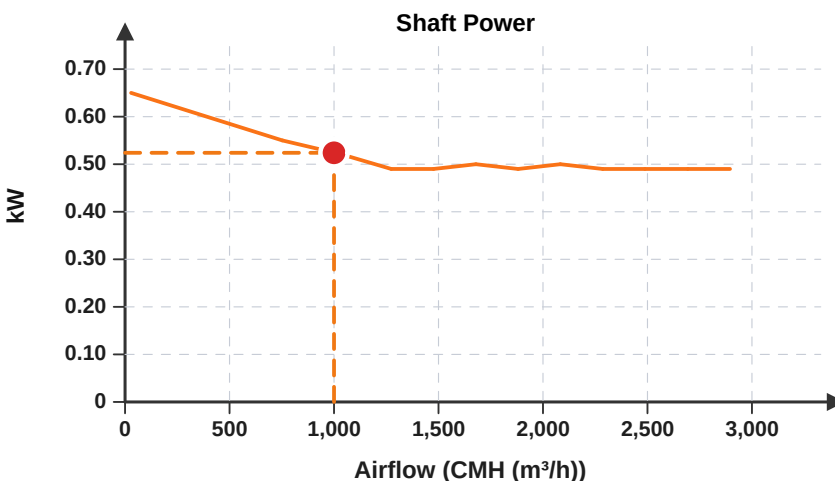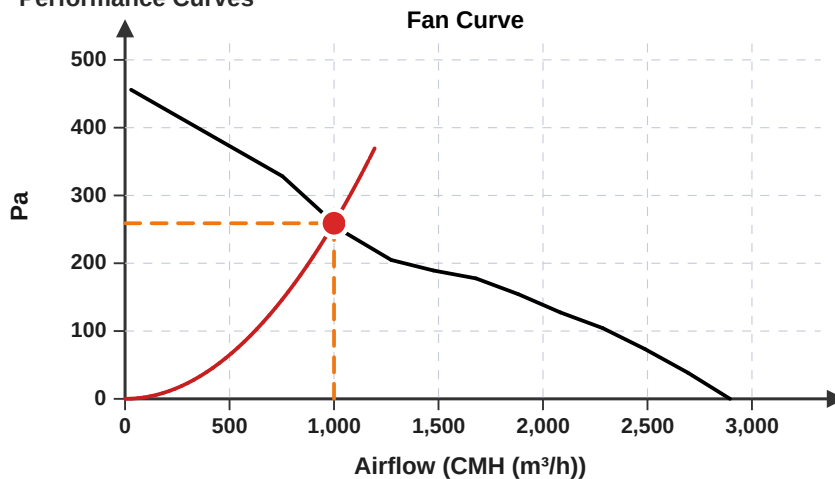




Model : KTA/2-315-6/40°-0.75kW-F400

Sound Power Level (LwA)

84 dB(A)


At Source

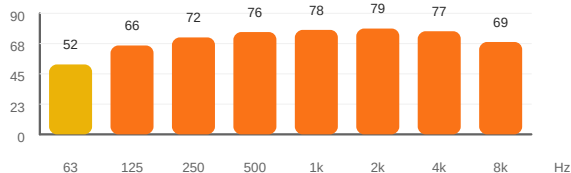

Sound Pressure Level (LpA)

64 dB(A)


At 3m, Q=1

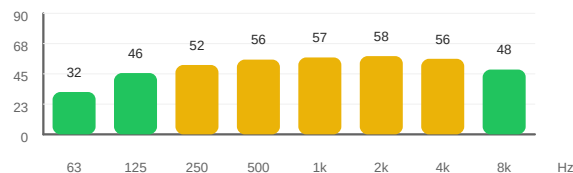

Frequency	63 Hz	125 Hz	250 Hz	500 Hz	1 kHz	2 kHz	4 kHz	8 kHz	Overall	NC
Source (LwA)	52	66	72	76	78	79	77	69	84.0 dB(A)	NC-80
At 3m, Q=1 (LpA)	32	46	52	56	57	58	56	48	63.5 dB(A)	NC-60

NC-60: Light industrial, workshop. Sound data is calculated and should be used as guideline only.

Technical Drawing

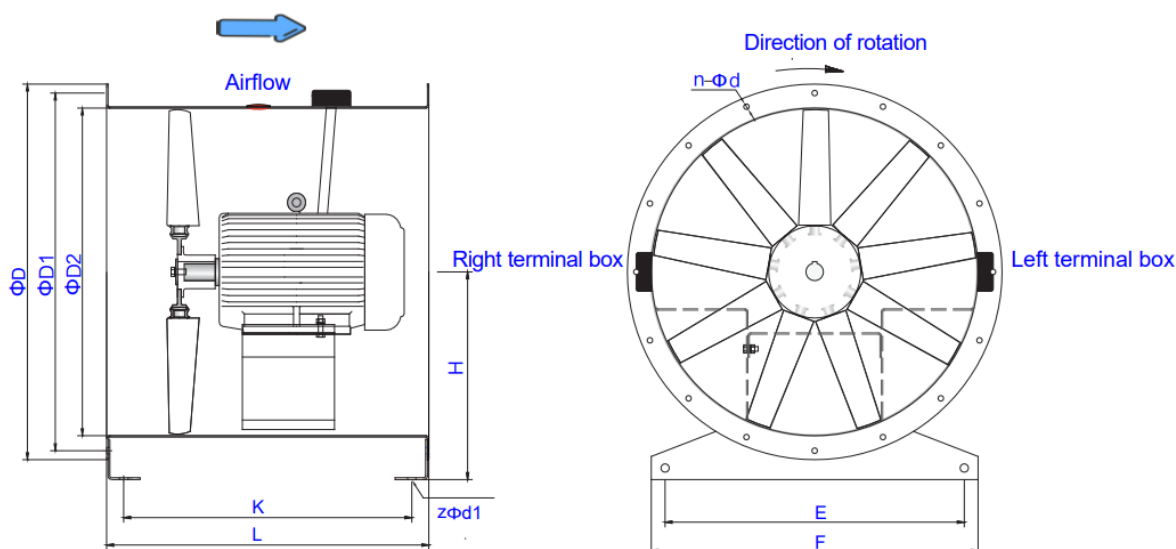

Dimensions (mm)

Size	$\Phi D2$	$\Phi D1$	ΦD	H	E	F	L	K	$n-\Phi d$	$z-\Phi d1$	Motor Max
315	320	366	398	205	265	315	400	358	$8-\Phi 10$	$4-\Phi 10$	80Z

Compatible Accessories:

- Mounting feet
- Matching flanges



Catalogue



IOM Manual