

Model : KVF-150M

KINAIR Circular Inline Duct Fan has an all metal material with strong anti-corrosion ability. Backward inclined type of Impeller design, Optimization of air duct, Ensure continuous and high efficient air supply, air volume supply is adequate. The fan speed can be controlled by voltage or frequency variation regulators. IP44 protection and F-class insulation external rotor motor, which is more durable and ball bearing with long working life over 50000 hours.

Duty Point

Airflow	100 LPS (L/s)
Static Pressure	353 Pa
Temperature	20 °C
Altitude	0 m
Density	1.2 kg/m ³

Operating Point

Airflow	100 LPS (L/s)
Static Pressure	353 Pa
Dynamic Pressure	19.2 Pa
Total Pressure	372 Pa
Shaft Power	0.104 kW
Outlet Velocity	5.7 m/s
Fan Speed	2400 rpm
SFP	1.04 W/(l/s)


Construction

Diameter	150 mm
Weight	5.0 kg

Motor Characteristics

Poles	2P
Power	0.104 kW
Frequency	50 Hz
Voltage	220V
IP Rating	IP44
Insulation	Class F

Performance Curves

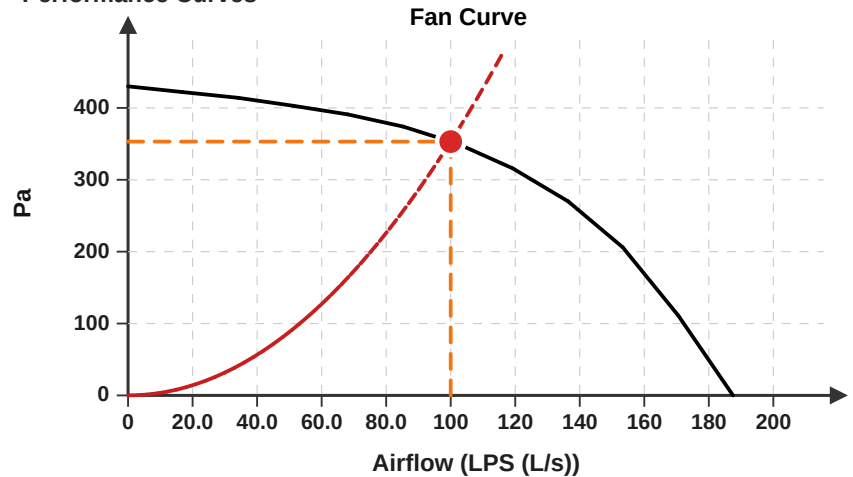

Sound Data

Parameter	At Source	At 3m
Overall Sound Level	65.0 dB(A)	44.5 dB(A)
Estimated NC Rating	-	NC-40



NC rating estimated from overall value at distance.

Selections are based on standard air density of 1.2 kg/m³. Performance tested per ISO 5801 / AMCA 210.



Model : KVF-150M

Technical Drawing

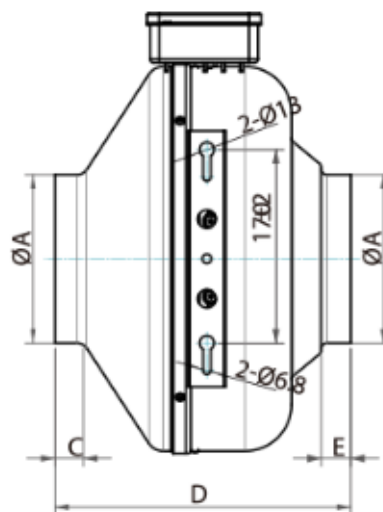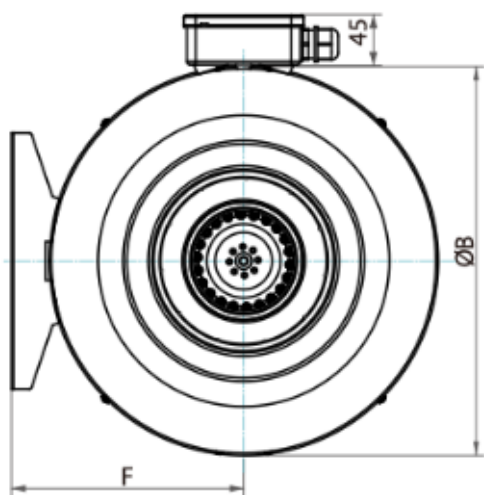

Dimensions (mm)

Size	ØA	ØB	C	D	E	F
150	148	342	25	260	26	204

Compatible Accessories:

- Inbuilt Mounting foot



Catalogue