



## Model : KTAFA/2-355-6/35°-1.1kW-F400

Tube casings crafted from durable rolled Mild sheet steel, featuring corrosion resistant hot-dip galvanized finish, The variable pitch angle impeller is dynamically balanced, the Impeller made from high grade aluminum, It offers excellent strength and lightweight characteristics for efficient airflow.

**F400:** Certified for continuous operation at temperatures up to 400°C for 2 hours, designed for high-temperature smoke extraction in critical fire safety systems.

### Duty Point

|                 |                  |
|-----------------|------------------|
| Airflow         | 3,000 CMH (m³/h) |
| Static Pressure | 188 Pa           |
| Temperature     | 20 °C            |
| Altitude        | 0 m              |
| Density         | 1.2 kg/m³        |

### Operating Point

|                   |                  |
|-------------------|------------------|
| Airflow           | 3,000 CMH (m³/h) |
| Static Pressure   | 188 Pa           |
| Dynamic Pressure  | 42.5 Pa          |
| Total Pressure    | 231 Pa           |
| Static Efficiency | 20.0%            |
| Total Efficiency  | 24.6%            |
| Shaft Power       | 0.783 kW         |
| Outlet Velocity   | 8.4 m/s          |
| Fan Speed         | 2850 rpm         |
| SFP               | 0.94 W/(l/s)     |

### Construction

|             |         |
|-------------|---------|
| Diameter    | 355 mm  |
| Blade Count | 6       |
| Blade Angle | 35°     |
| Weight      | 15.7 kg |




### Motor Characteristics

|                   |         |
|-------------------|---------|
| Poles             | 2P      |
| Power             | 1.1 kW  |
| Frequency         | 50 Hz   |
| Voltage           | 415V    |
| Full Load Current | 2.3 A   |
| Starting Current  | 14.95 A |
| IP Rating         | IP55    |
| Insulation        | Class H |
| Efficiency Class  | IE3     |
| Fire Rating       | F400    |
| Brand             | HAVELLS |
| Frame             | 80Z     |

### Certifications



### Performance Curves

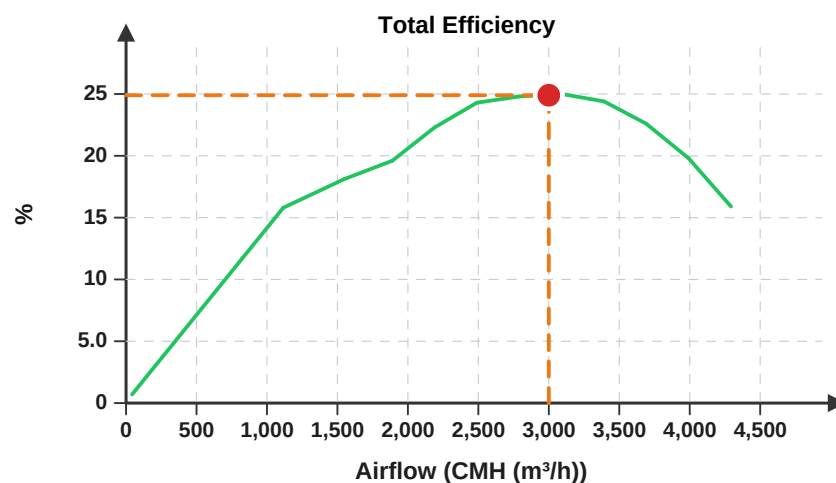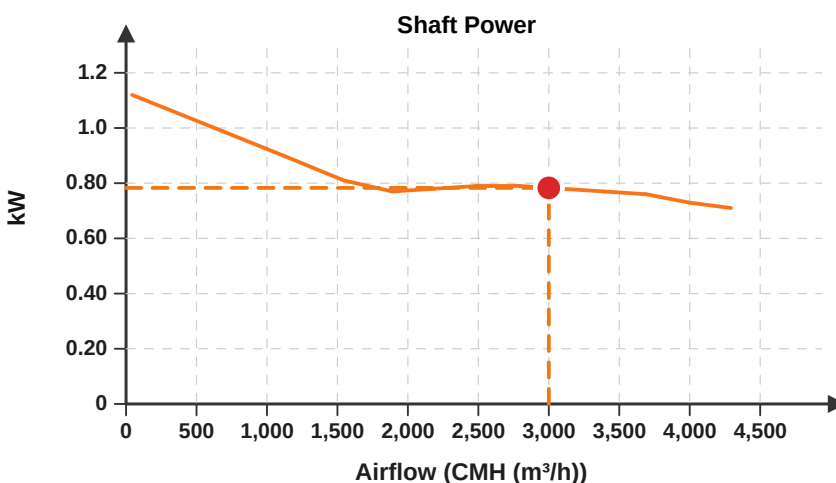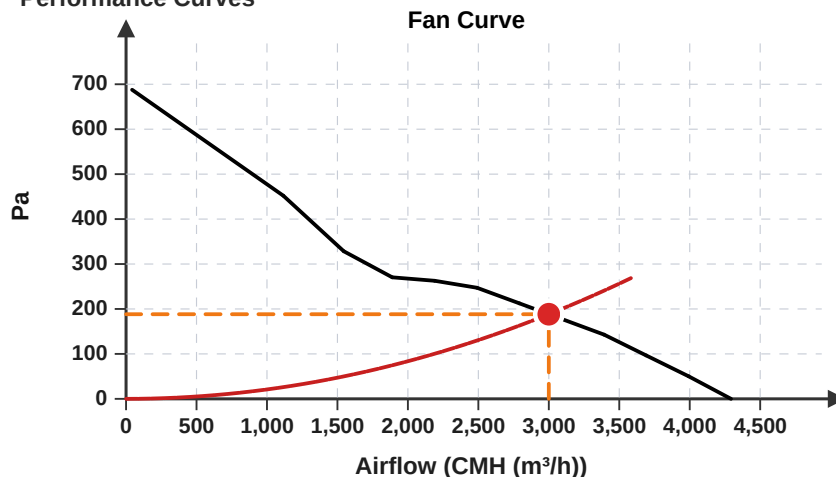




Model : KTA/2-355-6/35°-1.1kW-F400


## Sound Power Level (LwA)

85 dB(A)

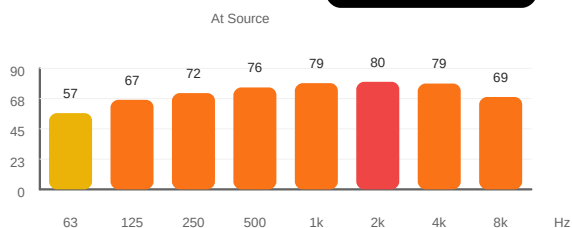

## Sound Pressure Level (LpA)


65 dB(A)

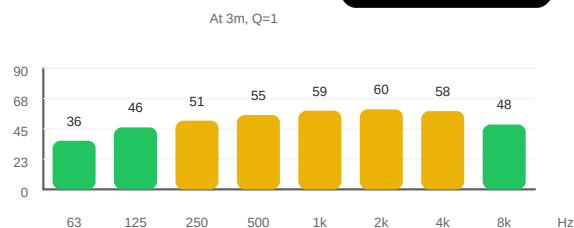

| Frequency        | 63 Hz | 125 Hz | 250 Hz | 500 Hz | 1 kHz | 2 kHz | 4 kHz | 8 kHz | Overall    | NC    |
|------------------|-------|--------|--------|--------|-------|-------|-------|-------|------------|-------|
| Source (LwA)     | 57    | 67     | 72     | 76     | 79    | 80    | 79    | 69    | 85.0 dB(A) | NC-80 |
| At 3m, Q=1 (LpA) | 36    | 46     | 51     | 55     | 59    | 60    | 58    | 48    | 64.5 dB(A) | NC-65 |

NC-65: Heavy industrial. Sound data is calculated and should be used as guideline only.

## Technical Drawing

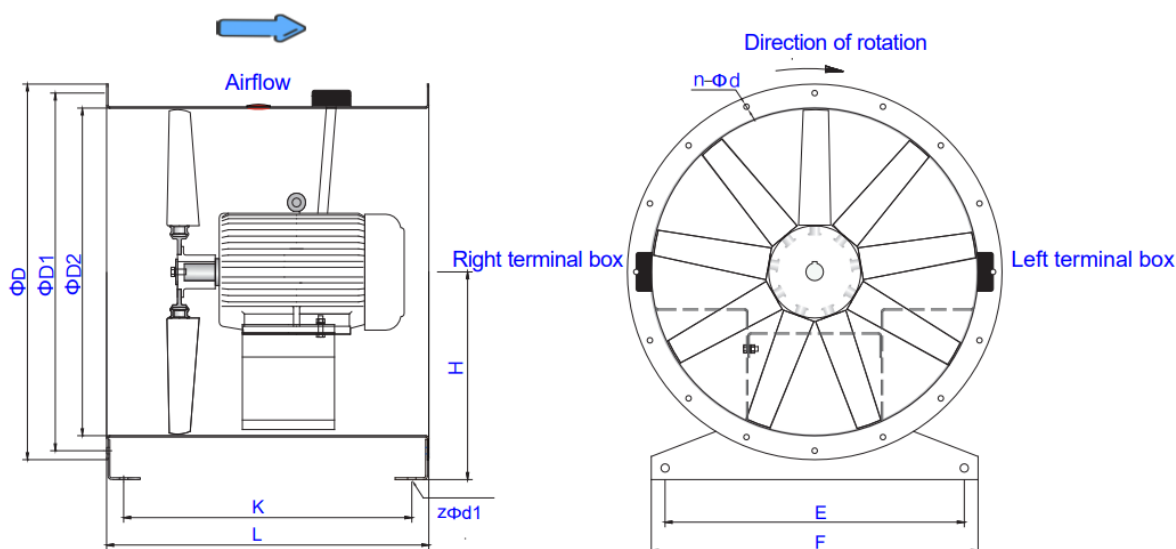

## Dimensions (mm)

| Size | $\Phi D2$ | $\Phi D1$ | $\Phi D$ | H   | E   | F   | L   | K   | $n-\Phi d$  | $z-\Phi d1$ | Motor Max |
|------|-----------|-----------|----------|-----|-----|-----|-----|-----|-------------|-------------|-----------|
| 355  | 359       | 405       | 438      | 225 | 305 | 355 | 420 | 358 | $8-\Phi 10$ | $4-\Phi 10$ | 80Z       |

## Compatible Accessories:

- Mounting feet
- Matching flanges



Catalogue



IOM Manual