



Model : KTAFF/2-315-6/35°-0.55kW-F400

Tube casings crafted from durable rolled Mild sheet steel, featuring corrosion resistant hot-dip galvanized finish, The variable pitch angle impeller is dynamically balanced, the Impeller made from high grade aluminum, It offers excellent strength and lightweight characteristics for efficient airflow.

F400: Certified for continuous operation at temperatures up to 400°C for 2 hours, designed for high-temperature smoke extraction in critical fire safety systems.

Duty Point

Airflow	1,650 CMH (m³/h)
Static Pressure	164 Pa
Temperature	20 °C
Altitude	0 m
Density	1.2 kg/m³

Operating Point

Airflow	1,650 CMH (m³/h)
Static Pressure	164 Pa
Dynamic Pressure	20.8 Pa
Total Pressure	185 Pa
Static Efficiency	18.3%
Total Efficiency	20.6%
Shaft Power	0.412 kW
Outlet Velocity	5.9 m/s
Fan Speed	2850 rpm
SFP	0.90 W/(l/s)

Construction

Diameter	315 mm
Blade Count	6
Blade Angle	35°
Weight	22.7 kg




Motor Characteristics

Poles	2P
Power	0.55 kW
Frequency	50 Hz
Voltage	415V
Full Load Current	1.2 A
Starting Current	6.6 A
IP Rating	IP55
Insulation	Class H
Efficiency Class	IE3
Fire Rating	F400
Brand	HAVELLS
Frame	80Z

Certifications



Performance Curves

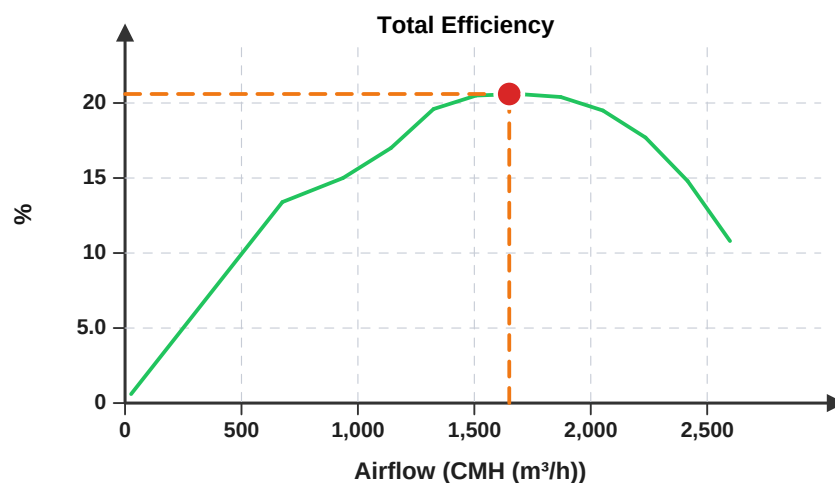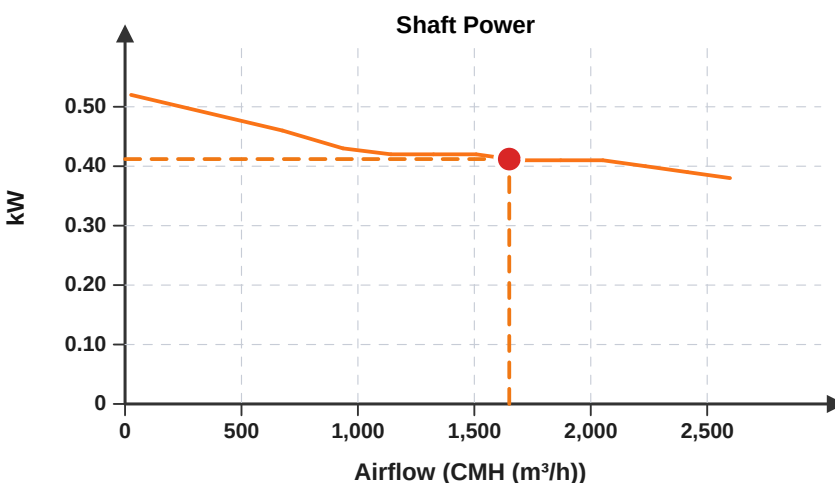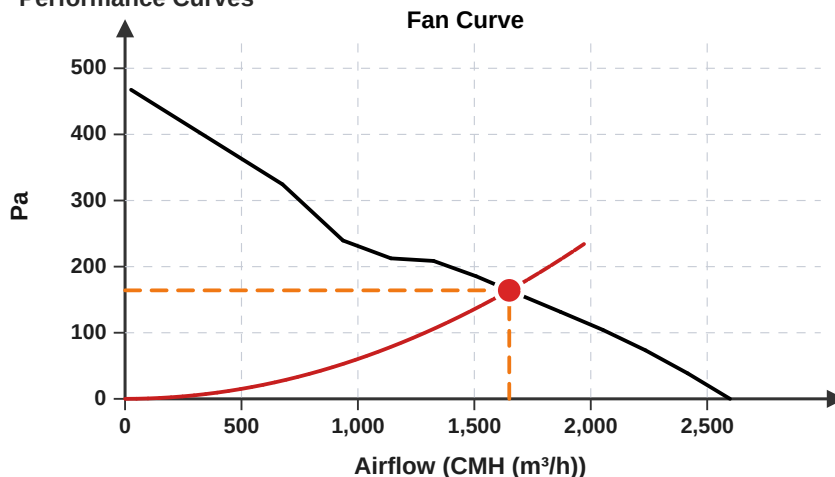




Model : KTA/2-315-6/35°-0.55kW-F400

Sound Power Level (LwA)

83 dB(A)


At Source

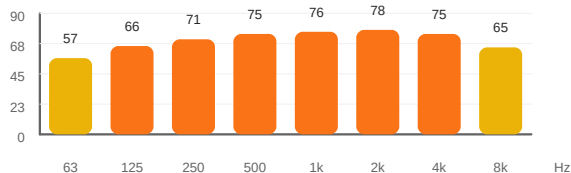

Sound Pressure Level (LpA)

62 dB(A)


At 3m, Q=1

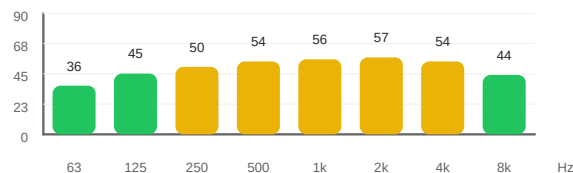

Frequency	63 Hz	125 Hz	250 Hz	500 Hz	1 kHz	2 kHz	4 kHz	8 kHz	Overall	NC
Source (LwA)	57	66	71	75	76	78	75	65	82.5 dB(A)	NC-80
At 3m, Q=1 (LpA)	36	45	50	54	56	57	54	44	62.0 dB(A)	NC-60

NC-60: Light industrial, workshop. Sound data is calculated and should be used as guideline only.

Technical Drawing

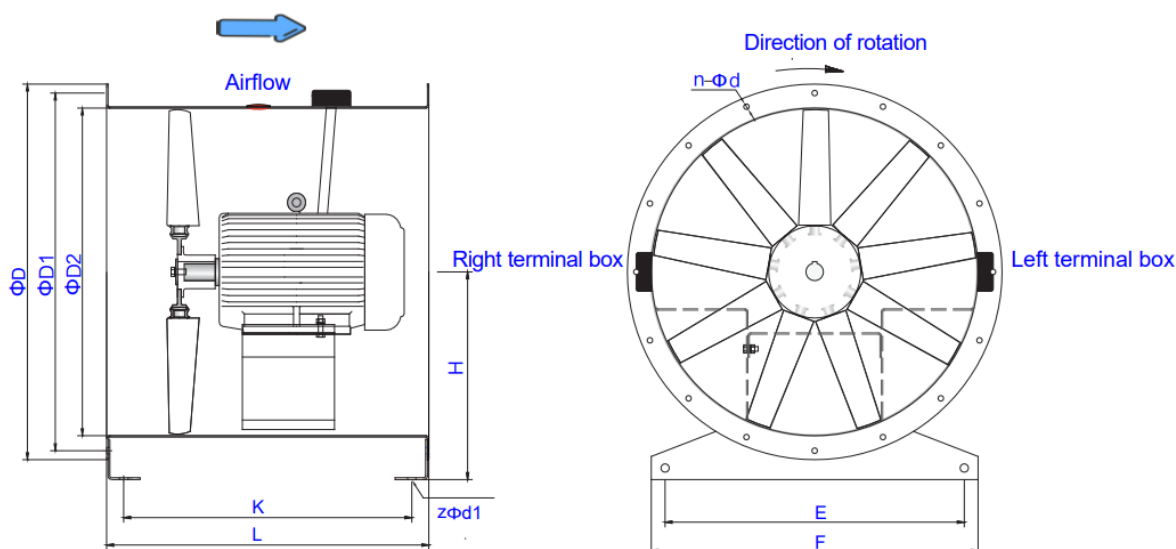

Dimensions (mm)

Size	$\Phi D2$	$\Phi D1$	ΦD	H	E	F	L	K	$n-\Phi d$	$z-\Phi d1$	Motor Max
315	320	366	398	205	265	315	400	358	$8-\Phi 10$	$4-\Phi 10$	80Z

Compatible Accessories:

- Mounting feet
- Matching flanges



Catalogue



IOM Manual