



Model : KVF-125P

KINAIR Mixed Flow In-line Ducted Fans have plastic housing, high efficient motor, quiet wind wheel and are durable.

Duty Point

Airflow	75.0 LPS (L/s)
Static Pressure	84.6 Pa
Temperature	20 °C
Altitude	0 m
Density	1.2 kg/m ³

Operating Point

Airflow	75.0 LPS (L/s)
Static Pressure	84.6 Pa
Dynamic Pressure	22.4 Pa
Total Pressure	107 Pa
Shaft Power	0.030 kW
Outlet Velocity	6.1 m/s
Fan Speed	2200 rpm
SFP	0.40 W/(l/s)


Construction

Diameter	125 mm
Weight	2.8 kg

Motor Characteristics

Poles	2P
Power	0.03 kW
Frequency	50 Hz
Voltage	220V

Performance Curves

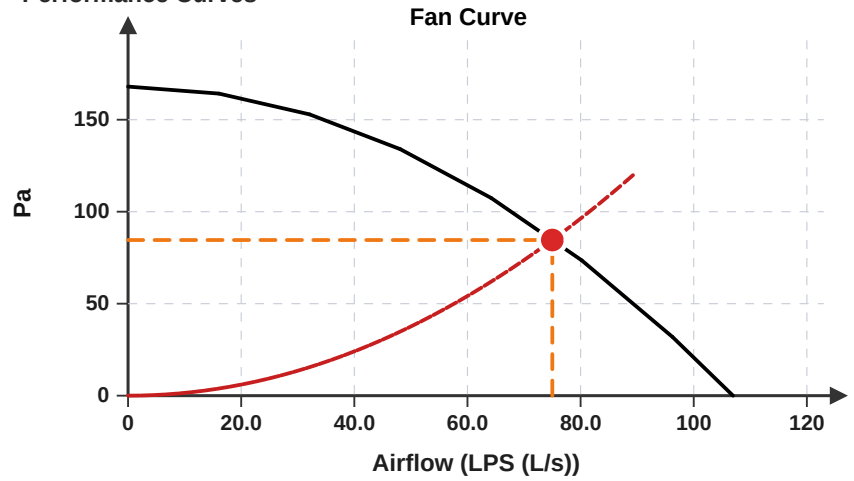

Sound Data


Parameter	At Source	At 3m
Overall Sound Level	34.0 dB(A)	13.5 dB(A)
Estimated NC Rating	-	NC-10

NC rating estimated from overall value at distance.



Model : KVF-125P

Technical Drawing

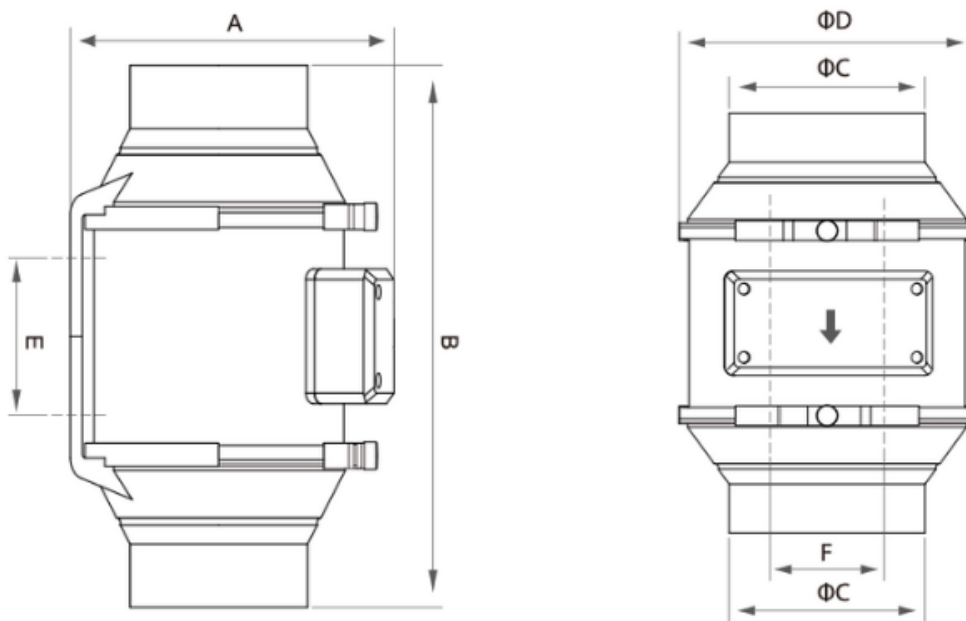

Dimensions (mm)

Size	A	B	C	D	E	F
125	215	257	121	177	59.5	79.5



Catalogue