# Interactive System Board Viewer

### EliteDesk 800 SFF series

# Welcome to the interactive System Board for the EliteDesk 800 SFF series

### Here's how to use it...

**Zoomable View** (Click the link to navigate to the viewer)


On the Zoomable View page, you will find the viewer's zoom navigation links above the viewer on the left-hand side. You can choose from four levels of magnification: 1x, 2x, 3x, and 4x.


**1x:** The default magnification is 1x and at this magnification you can view the location of a feature by selecting it from the numbered list on the left.

**2x, 3x, 4x:** When you choose a greater magnification level, you use the navigation arrows and numbered features list to focus on the feature that you wish to review.


### That's it!

# 1x view

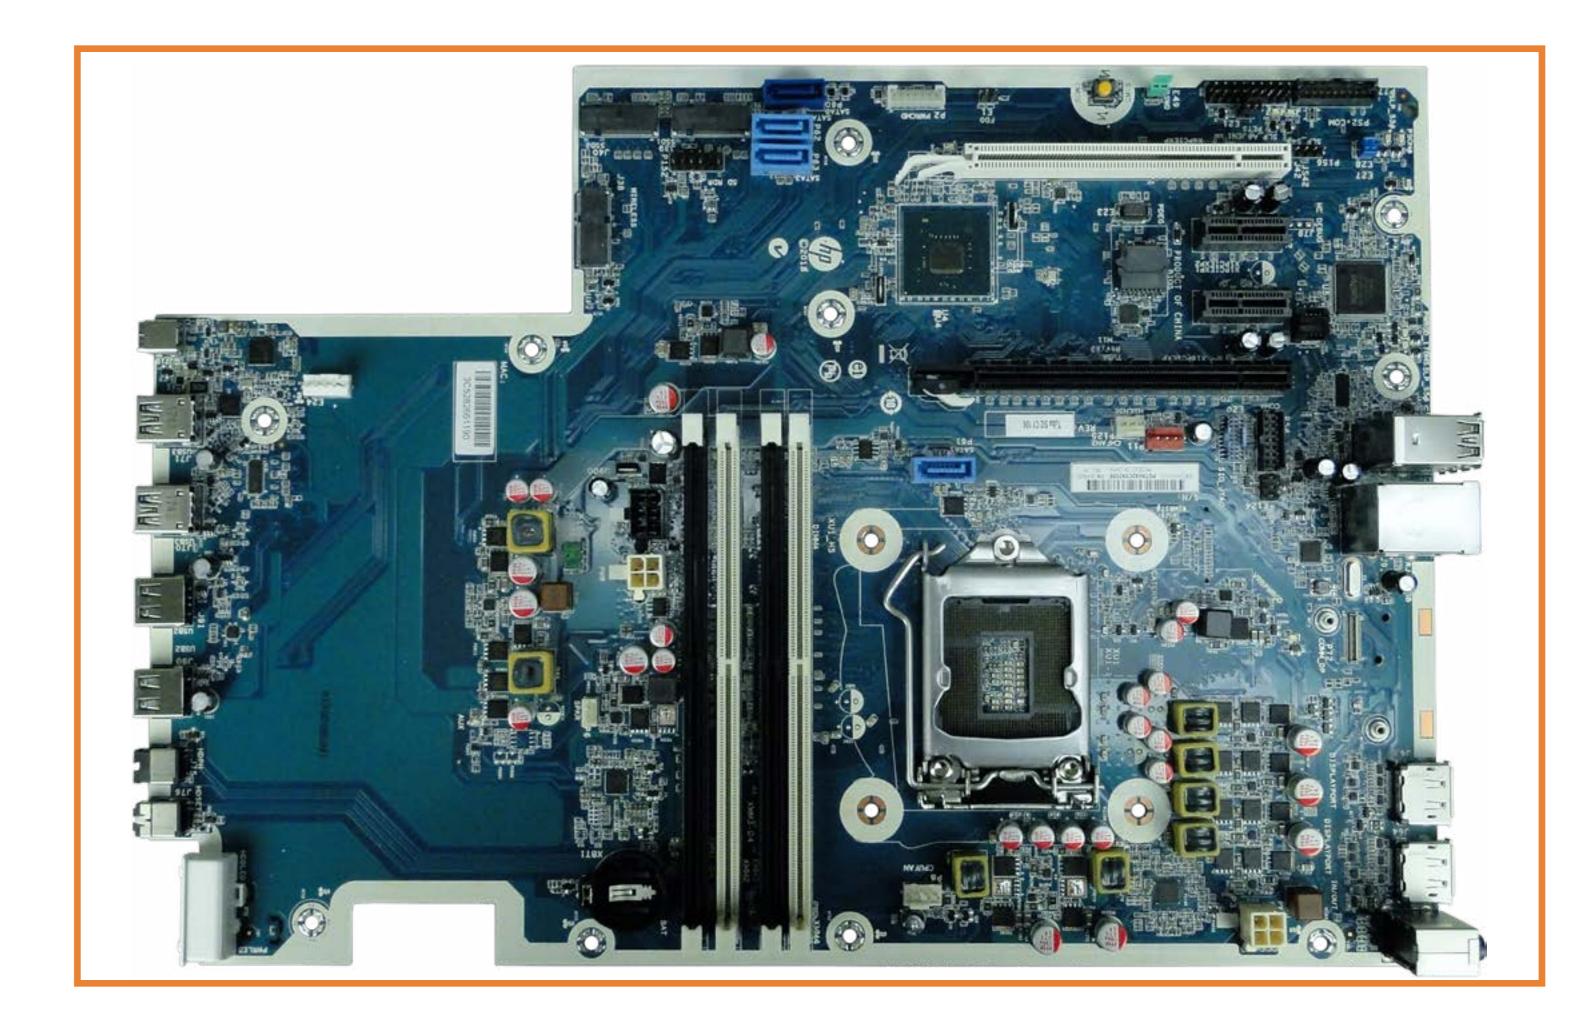





- 1. E24
- 2. SATA Power
- 3. M.2 WLAN
- 4. M.2 SSD
- 5. SATA2
- 6. SATAO
- 7. SATA3
- 8. Power Supply
- 9. CMOS Reset
- 10. PS2/Com B Header
- 11. PCI Express x4
- 12. PCI Express x1
- 13. PCI Express x16
- 14. Hood Sensor
- 15. USB 3.1 ports
- 16. Optional Serial Port
- 17. USB 2.0 ports
- 18. Hood Lock/Solenoid
- 19. Rear Fan
- 20. Optional Port
- 21. Display Port Monitor Connectors
- 22. Audio In/Out Jack
- 23. CPU Power
- 24. Processor
- 25. CPU Fan
- 26. SATA1
- 27. DIMM Slots
- 28. Battery
- 29. Speaker
- 30. Power Connector
- 31. Power Button
- 32. Headphone/Microphone Combo Jack
- 33. Headphone Jack
- 34. USB 2.0 Fast Charge
- 35. USB 2.0
- 36. USB 3.1 Gen2
- 37. USB Type-C

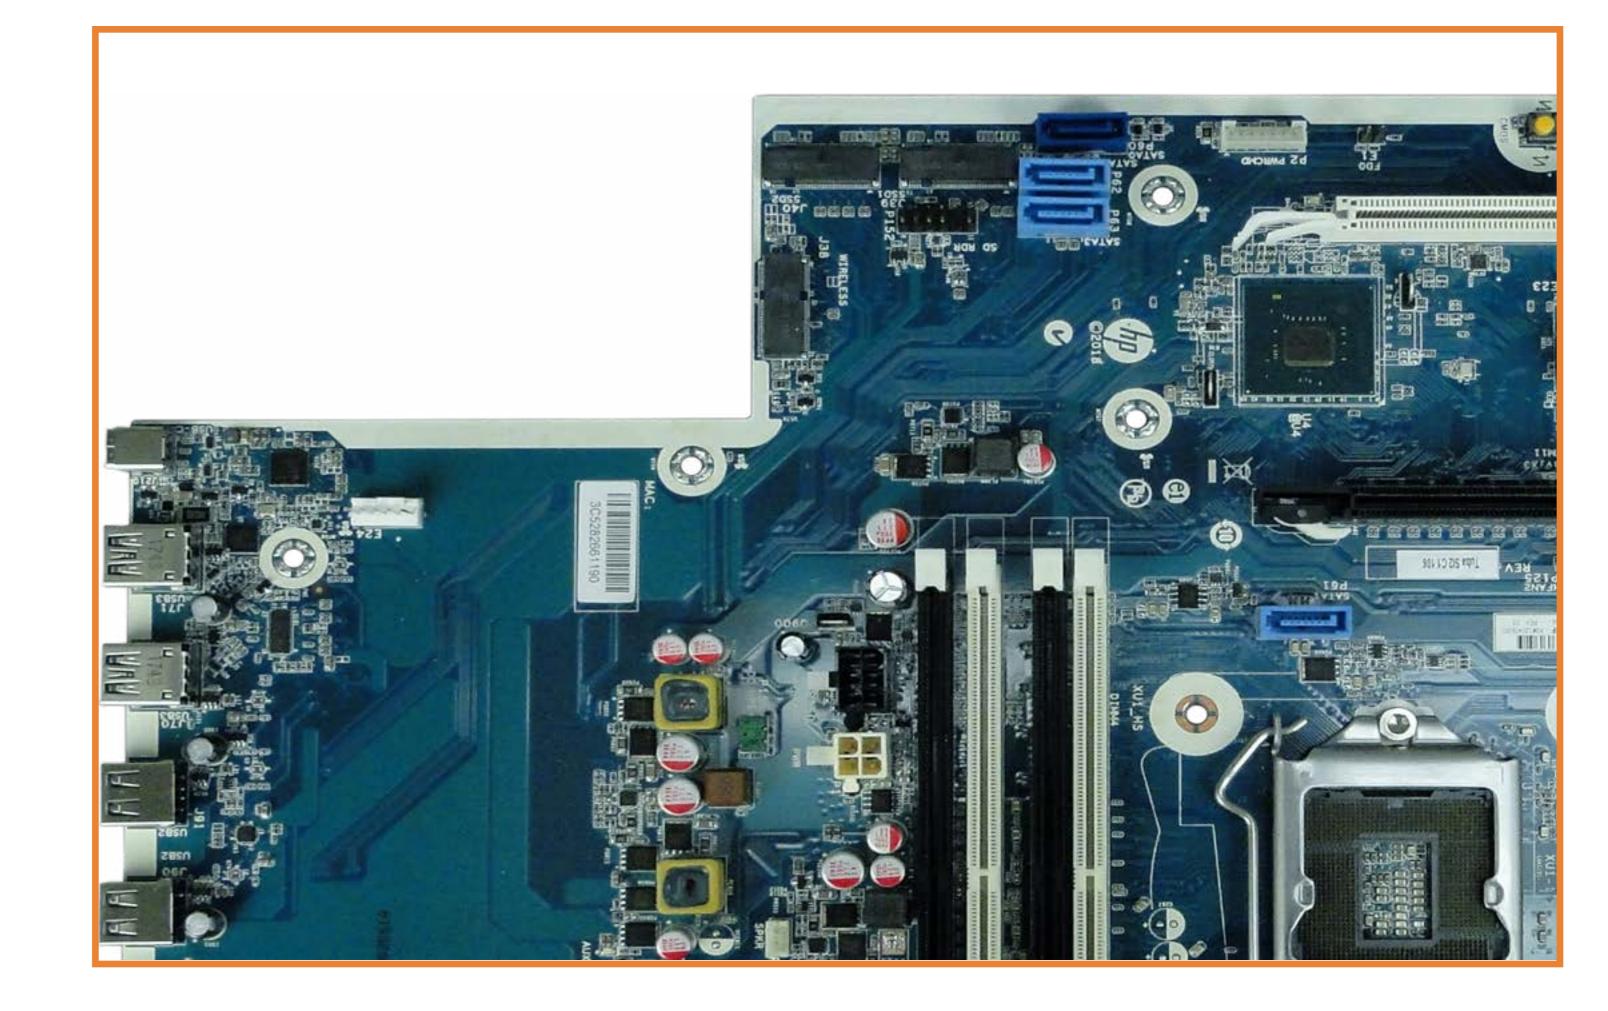

- 100
- 2. SATA Power
- 3. M.2 WLAN
- 4. M.2 SSD
- 5. SATA2
- 6. SATAO
- 7. SATA3
- 8. Power Supply
- 9. CMOS Reset
- 10. PS2/Com B Header
- 11. PCI Express x4
- 12. PCI Express x1
- 13. PCI Express x16
- 14. Hood Sensor
- 15. USB 3.1 ports
- 16. Optional Serial Port
- 17. USB 2.0 ports
- 18. Hood Lock/Solenoid
- 19. Rear Fan
- 20. Optional Port
- 21. Display Port Monitor Connectors
- 22. Audio In/Out Jack
- 23. CPU Power
- 24. Processor
- 25. CPU Fan
- 26. SATA1
- 27. DIMM Slots
- 28. Battery
- 29. Speaker
- 30. Power Connector
- 31. Power Button
- 32. Headphone/Microphone Combo Jack
- 33. Headphone Jack
- 34. USB 2.0 Fast Charge
- 35. USB 2.0
- 36. USB 3.1 Gen2
- 37. USB Type-C

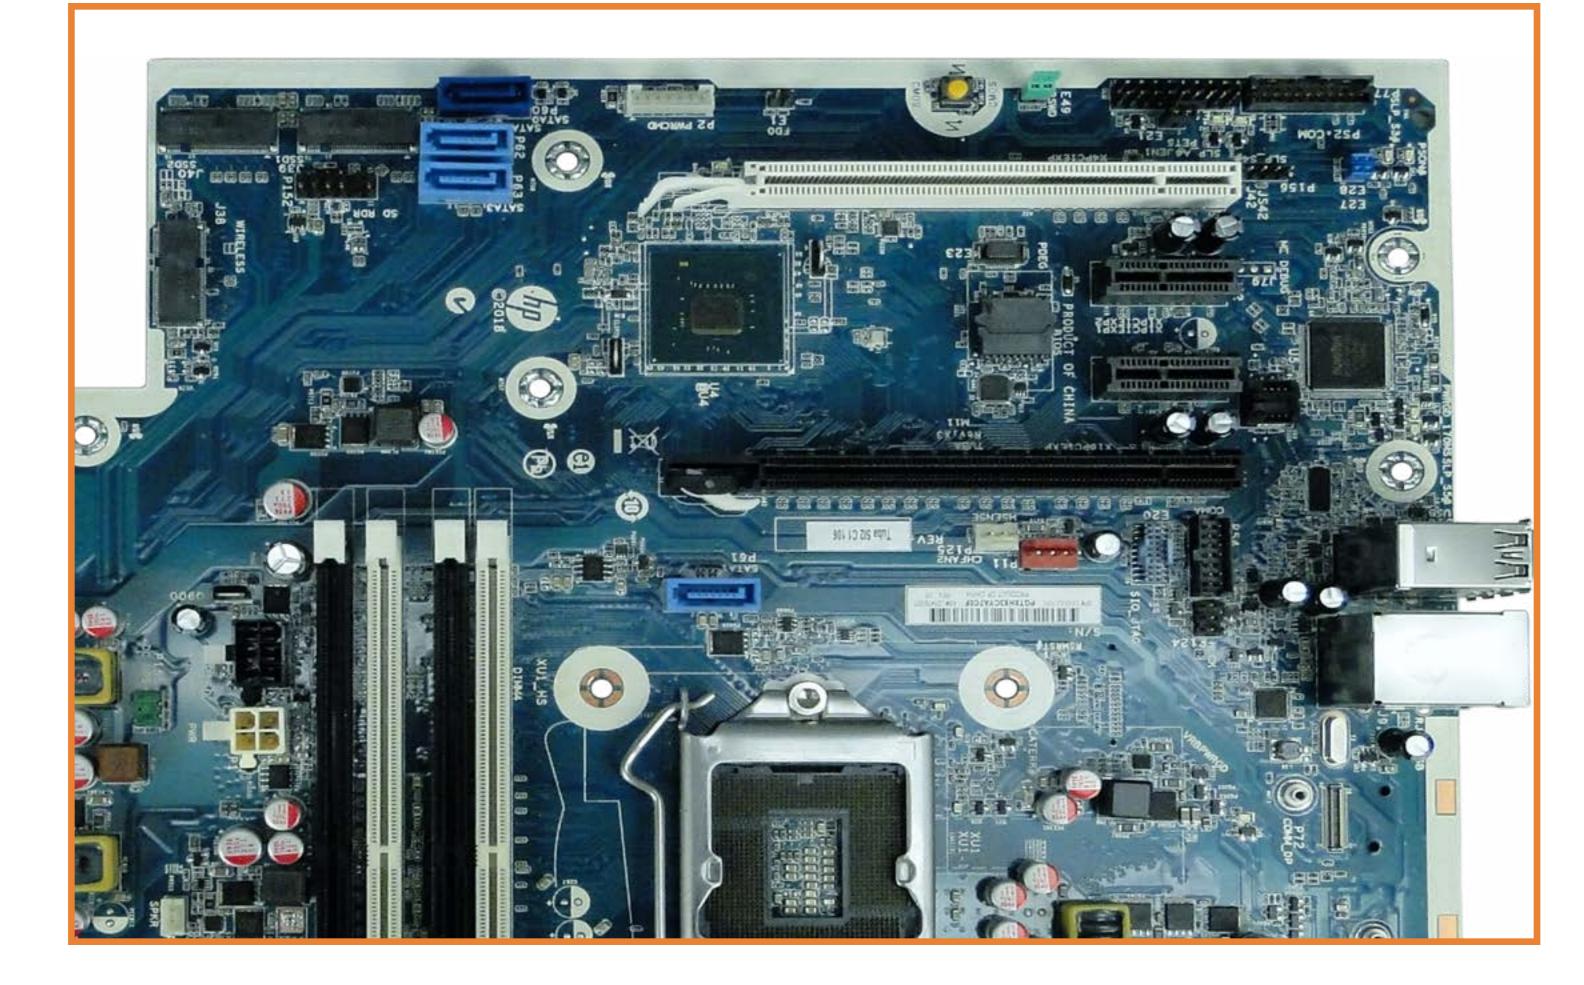







- 1. E24
- 2. SATA Power
- 3. M.2 WLAN
- 4. M.2 SSD
- 5. SATA2
- 6. SATAO
- 7. SATA3
- 8. Power Supply
- 9. CMOS Reset
- 10. PS2/Com B Header
- 11. PCI Express x4
- 12. PCI Express x1

### 13. PCI Express x16

- 14. Hood Sensor
- 15. USB 3.1 ports
- 16. Optional Serial Port
- 17. USB 2.0 ports
- 18. Hood Lock/Solenoid
- 19. Rear Fan
- 20. Optional Port
- 21. Display Port Monitor Connectors
- 22. Audio In/Out Jack
- 23. CPU Power
- 24. Processor
- 25. CPU Fan
- 26. SATA1
- 27. DIMM Slots
- 28. Battery
- 29. Speaker
- 30. Power Connector
- 31. Power Button
- 32. Headphone/Microphone Combo Jack
- 33. Headphone Jack
- 34. USB 2.0 Fast Charge
- 35. USB 2.0
- 36. USB 3.1 Gen2
- 37. USB Type-C

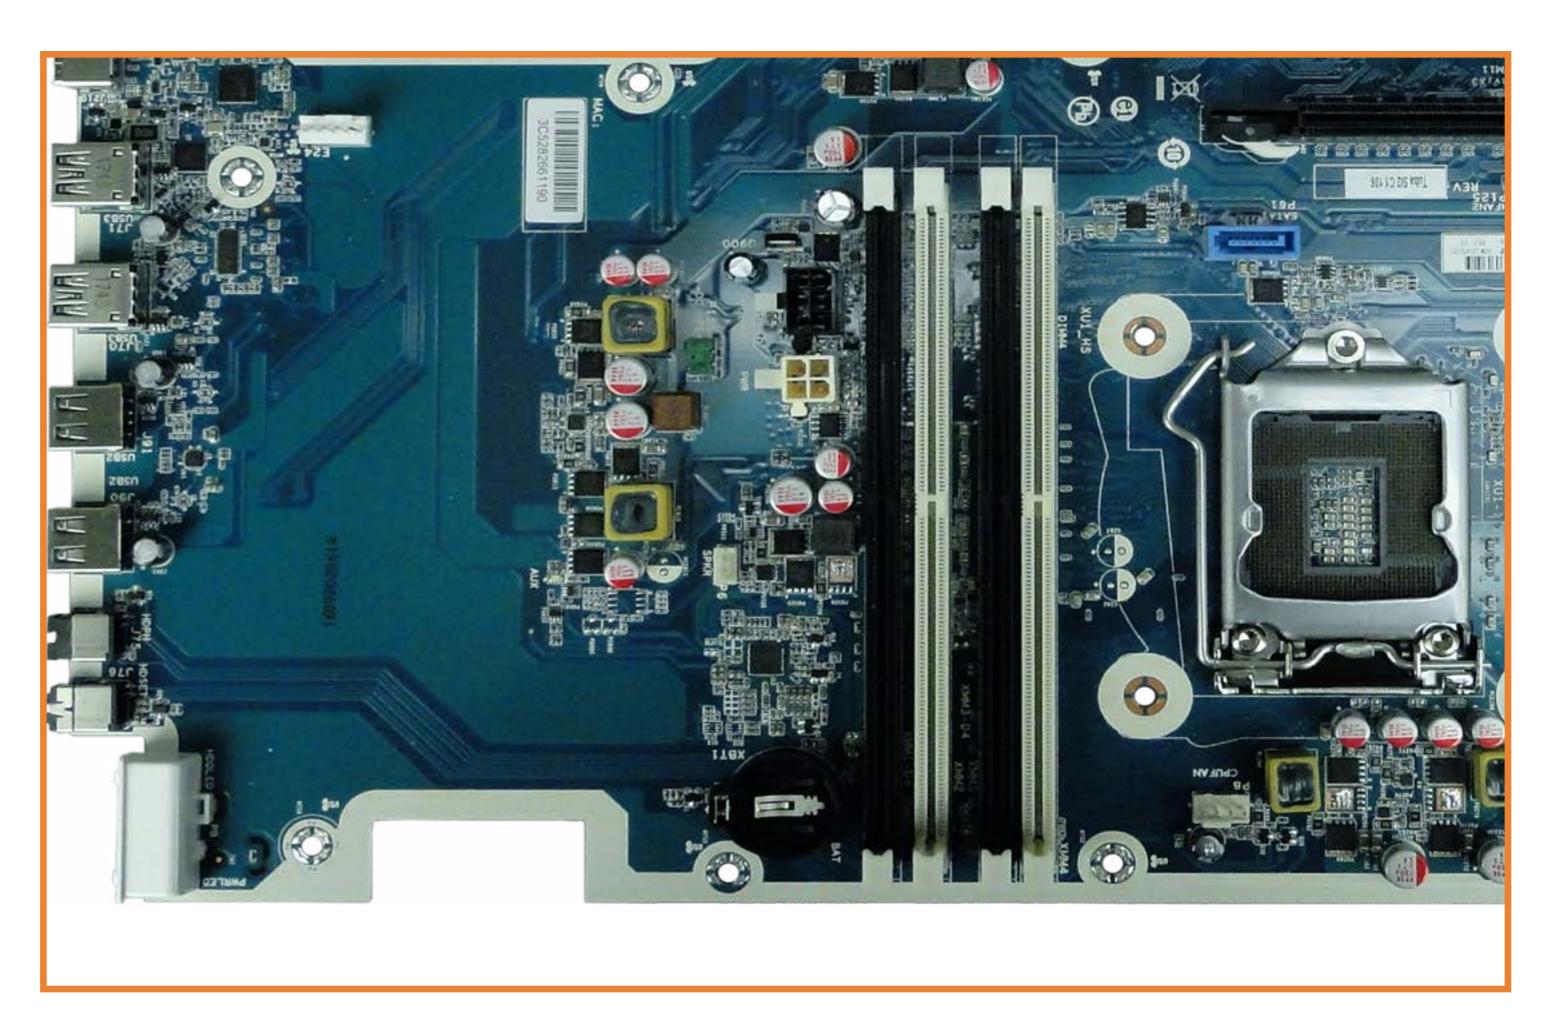




- 1. E24
- 2. SATA Power
- 3. M.2 WLAN
- 4. M.2 SSD
- 5. SATA2
- 6. SATAO
- 7. SATA3
- 8. Power Supply
- 9. CMOS Reset
- 10. PS2/Com B Header
- 11. PCI Express x4
- 12. PCI Express x1
- 13. PCI Express x16
- 14. Hood Sensor
- 15. USB 3.1 ports
- 16. Optional Serial Port
- 17. USB 2.0 ports
- 18. Hood Lock/Solenoid
- 19. Rear Fan
- 20. Optional Port
- 21. Display Port Monitor Connectors
- 22. Audio In/Out Jack
- 23. CPU Power
- 24. Processor
- 25. CPU Fan
- 26. SATA1
- 27. DIMM Slots
- 28. Battery
- 29. Speaker
- 30. Power Connector
- 31. Power Button
- 32. Headphone/Microphone Combo Jack
- 33. Headphone Jack
- 34. USB 2.0 Fast Charge
- 35. USB 2.0
- 36. USB 3.1 Gen2
- 37. USB Type-C





### 1. E24

- 2. SATA Power
- 3. M.2 WLAN
- 4. M.2 SSD
- 5. SATA2
- 6. SATAO
- 7. SATA3
- 8. Power Supply
- 9. CMOS Reset
- 10. PS2/Com B Header
- 11. PCI Express x4
- 12. PCI Express x1
- 13. PCI Express x16
- 14. Hood Sensor
- 15. USB 3.1 ports
- 16. Optional Serial Port
- 17. USB 2.0 ports
- 18. Hood Lock/Solenoid
- 19. Rear Fan
- 20. Optional Port
- 21. Display Port Monitor Connectors
- 22. Audio In/Out Jack
- 23. CPU Power
- 24. Processor
- 25. CPU Fan
- 26. SATA1
- 27. DIMM Slots
- 28. Battery
- 29. Speaker
- 30. Power Connector
- 31. Power Button
- 32. Headphone/Microphone Combo Jack
- 33. Headphone Jack
- 34. USB 2.0 Fast Charge
- 35. USB 2.0
- 36. USB 3.1 Gen2
- 37. USB Type-C

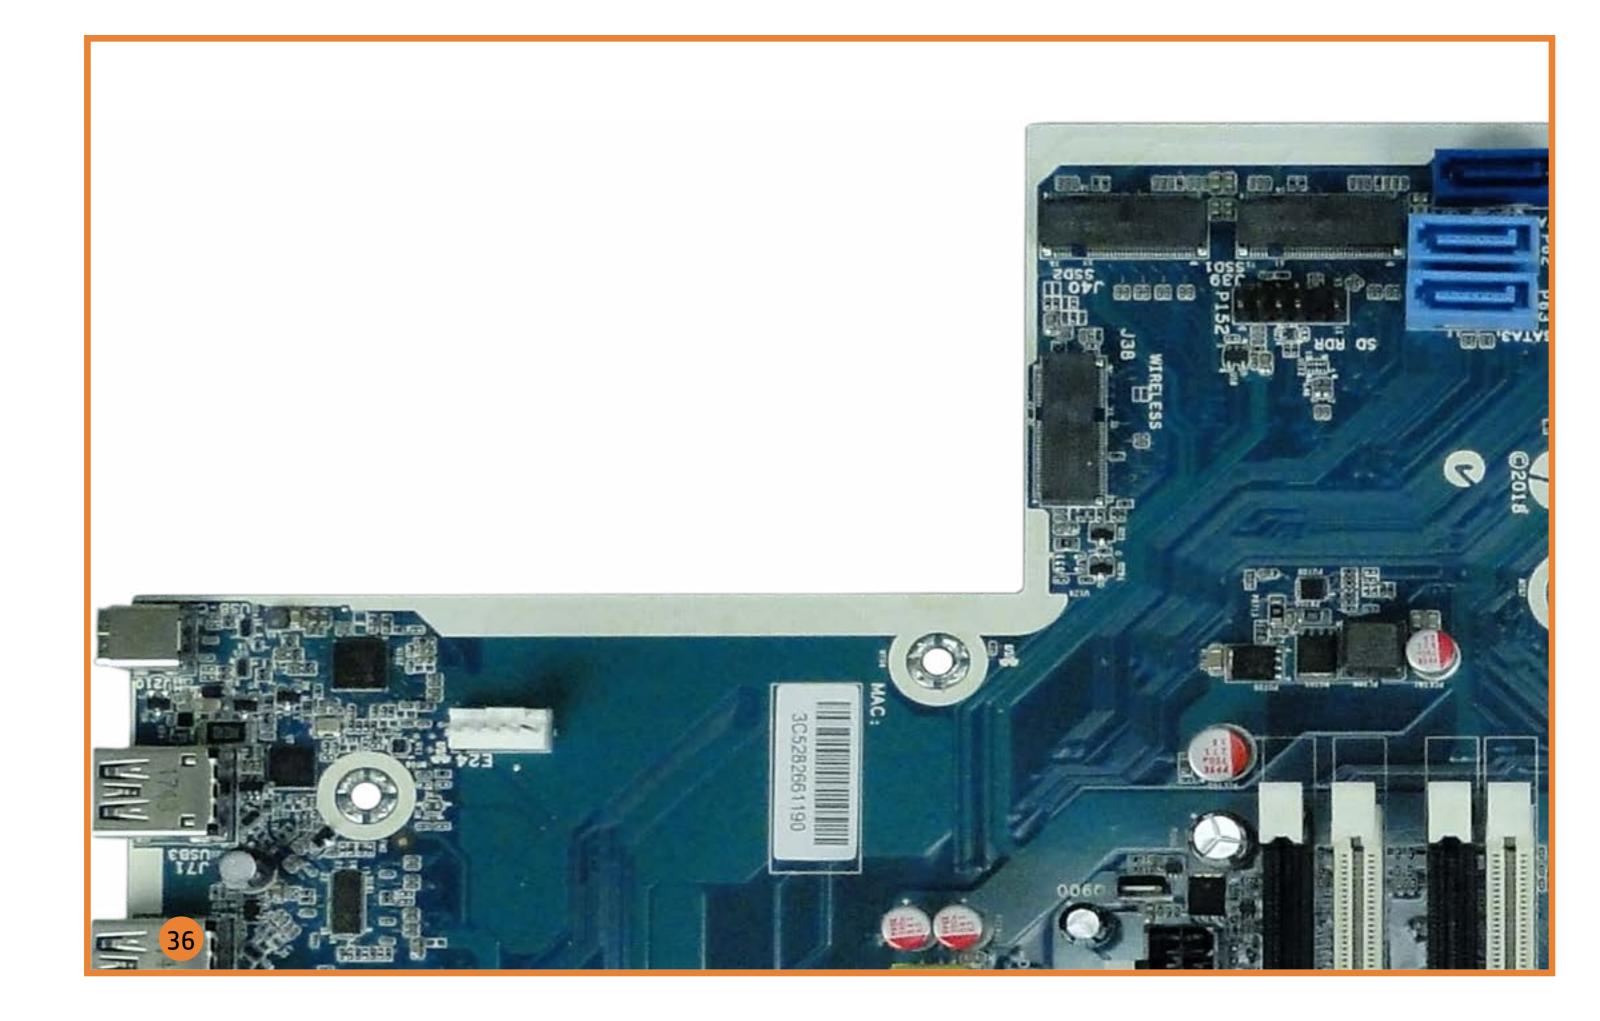


# **↑**


- 1. E24
- 2. SATA Power
- 3. M.2 WLAN
- 4. M.2 SSD
- 5. SATA2
- 6. SATAO
- 7. SATA38. Power Supply
- 9. CMOS Reset
- 10. PS2/Com B Header
- 11. PCI Express x4
- 12. PCI Express x1
- 13. PCI Express x16
- 14. Hood Sensor
- 15. USB 3.1 ports
- 16. Optional Serial Port
- 17. USB 2.0 ports
- 18. Hood Lock/Solenoid
- 19. Rear Fan
- 20. Optional Port
- 21. Display Port Monitor Connectors
- 22. Audio In/Out Jack
- 23. CPU Power
- 24. Processor
- 25. CPU Fan

### 26. SATA1


- 27. DIMM Slots
- 28. Battery
- 29. Speaker
- 30. Power Connector
- 31. Power Button
- 32. Headphone/Microphone Combo Jack
- 33. Headphone Jack
- 34. USB 2.0 Fast Charge
- 35. USB 2.0
- 36. USB 3.1 Gen2
- 37. USB Type-C

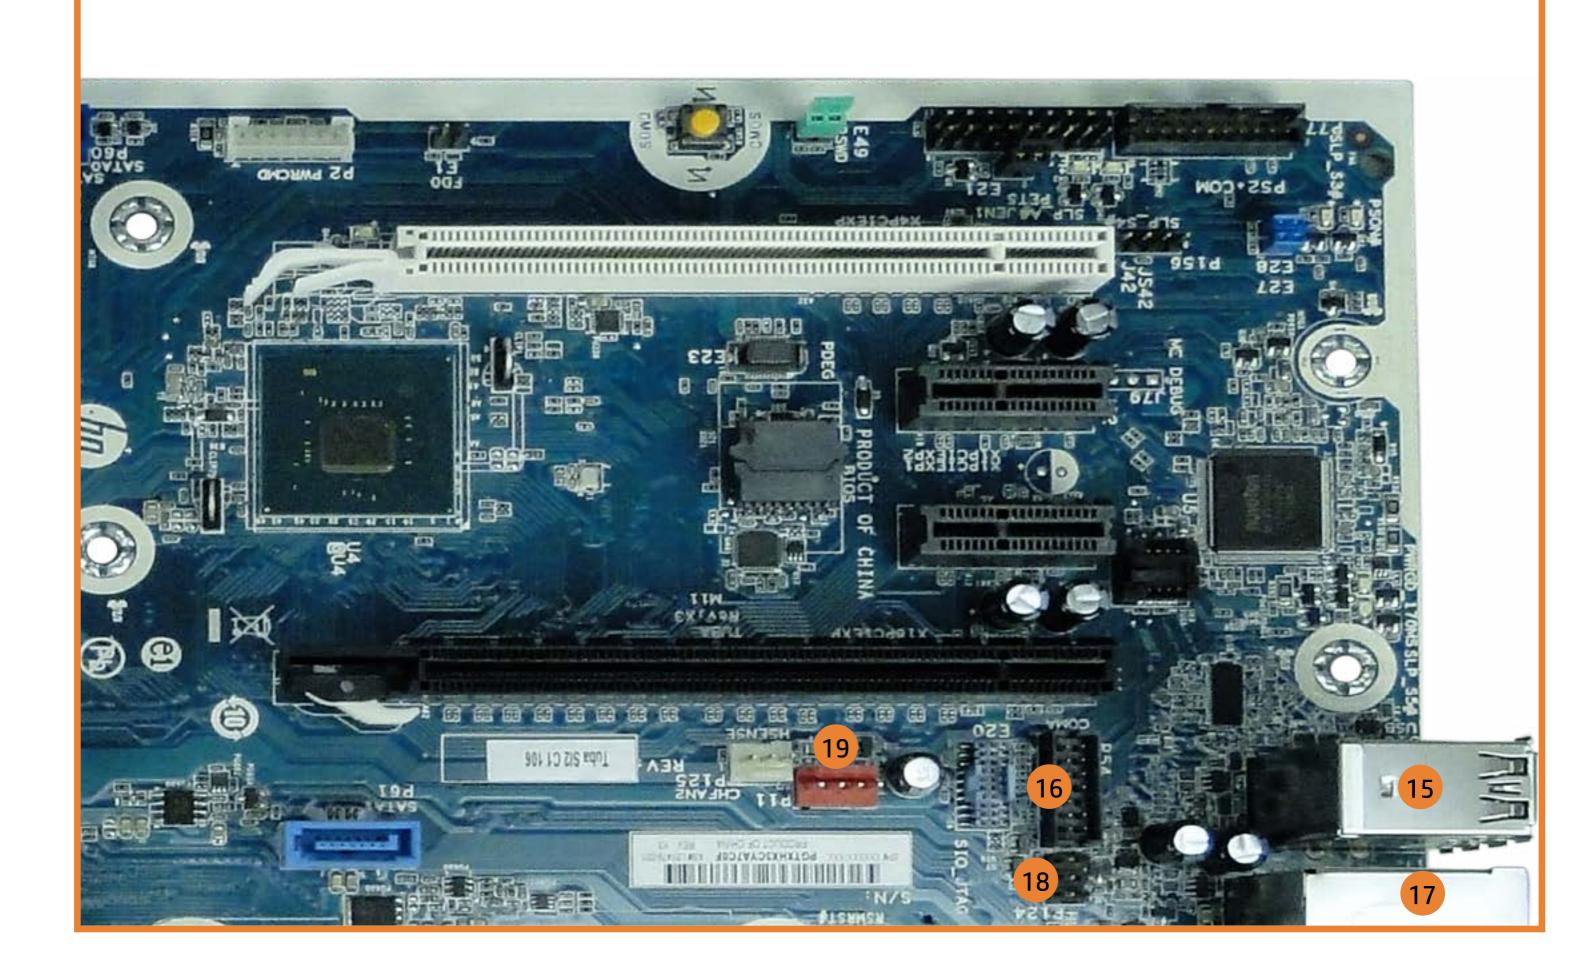








- 1. E24
- 2. SATA Power
- 3. M.2 WLAN
- 4. M.2 SSD
- 5. SATA2
- 6. SATAO
- 7. SATA3
- 8. Power Supply
- 9. CMOS Reset
- 10. PS2/Com B Header
- 11. PCI Express x4
- 12. PCI Express x1
- 13. PCI Express x16
- 14. Hood Sensor
- 15. USB 3.1 ports
- 16. Optional Serial Port
- 17. USB 2.0 ports
- 18. Hood Lock/Solenoid
- 19. Rear Fan
- 20. Optional Port
- 21. Display Port Monitor Connectors
- 22. Audio In/Out Jack
- 23. CPU Power
- 24. Processor
- 25. CPU Fan
- 26. SATA1
- 27. DIMM Slots
- 28. Battery
- 29. Speaker
- 30. Power Connector
- 31. Power Button
- 32. Headphone/Microphone Combo Jack
- 33. Headphone Jack
- 34. USB 2.0 Fast Charge
- 35. USB 2.0
- 36. USB 3.1 Gen2
- 37. USB Type-C

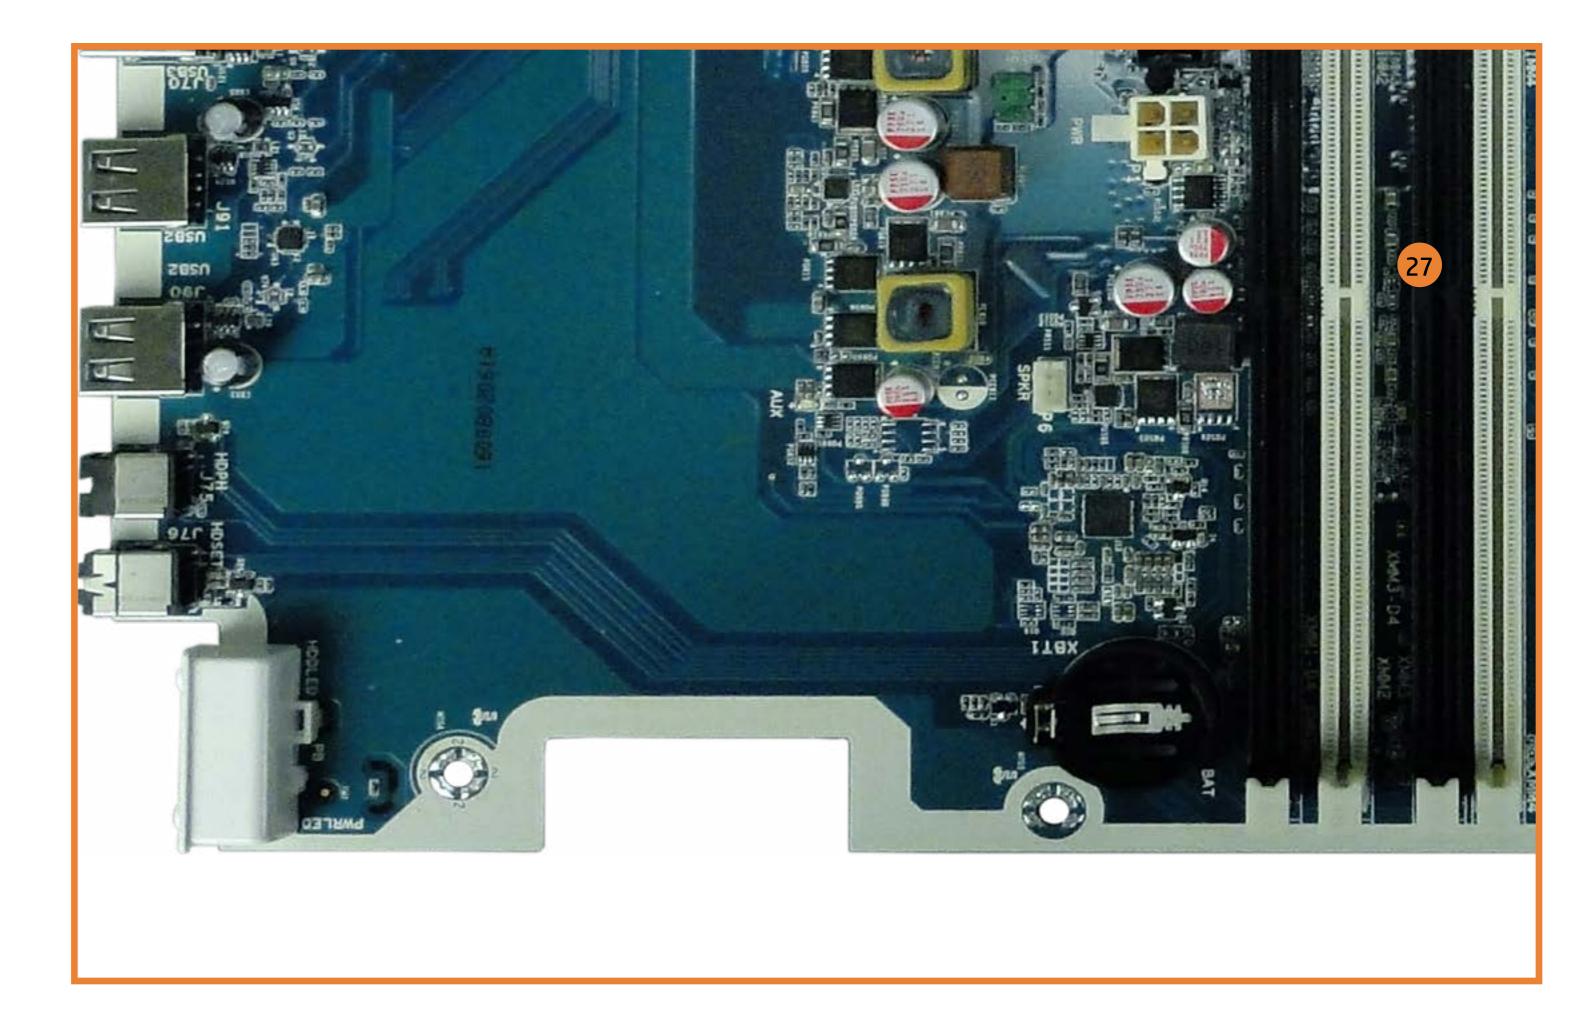




- 1. E24
- 2. SATA Power
- 3. M.2 WLAN
- 4. M.2 SSD
- 5. SATA2
- 6. SATAO
- 7. SATA3
- 8. Power Supply
- 9. CMOS Reset
- 10. PS2/Com B Header
- 11. PCI Express x4
- 12. PCI Express x1
- 13. PCI Express x16
- 14. Hood Sensor
- 15. USB 3.1 ports
- 16. Optional Serial Port
- 17. USB 2.0 ports
- 18. Hood Lock/Solenoid
- 19. Rear Fan
- 20. Optional Port
- 21. Display Port Monitor Connectors
- 22. Audio In/Out Jack
- 23. CPU Power
- 24. Processor
- 25. CPU Fan
- 26. SATA1
- 27. DIMM Slots
- 28. Battery
- 29. Speaker
- 30. Power Connector
- 31. Power Button
- 32. Headphone/Microphone Combo Jack
- 33. Headphone Jack
- 34. USB 2.0 Fast Charge
- 35. USB 2.0
- 36. USB 3.1 Gen2
- 37. USB Type-C

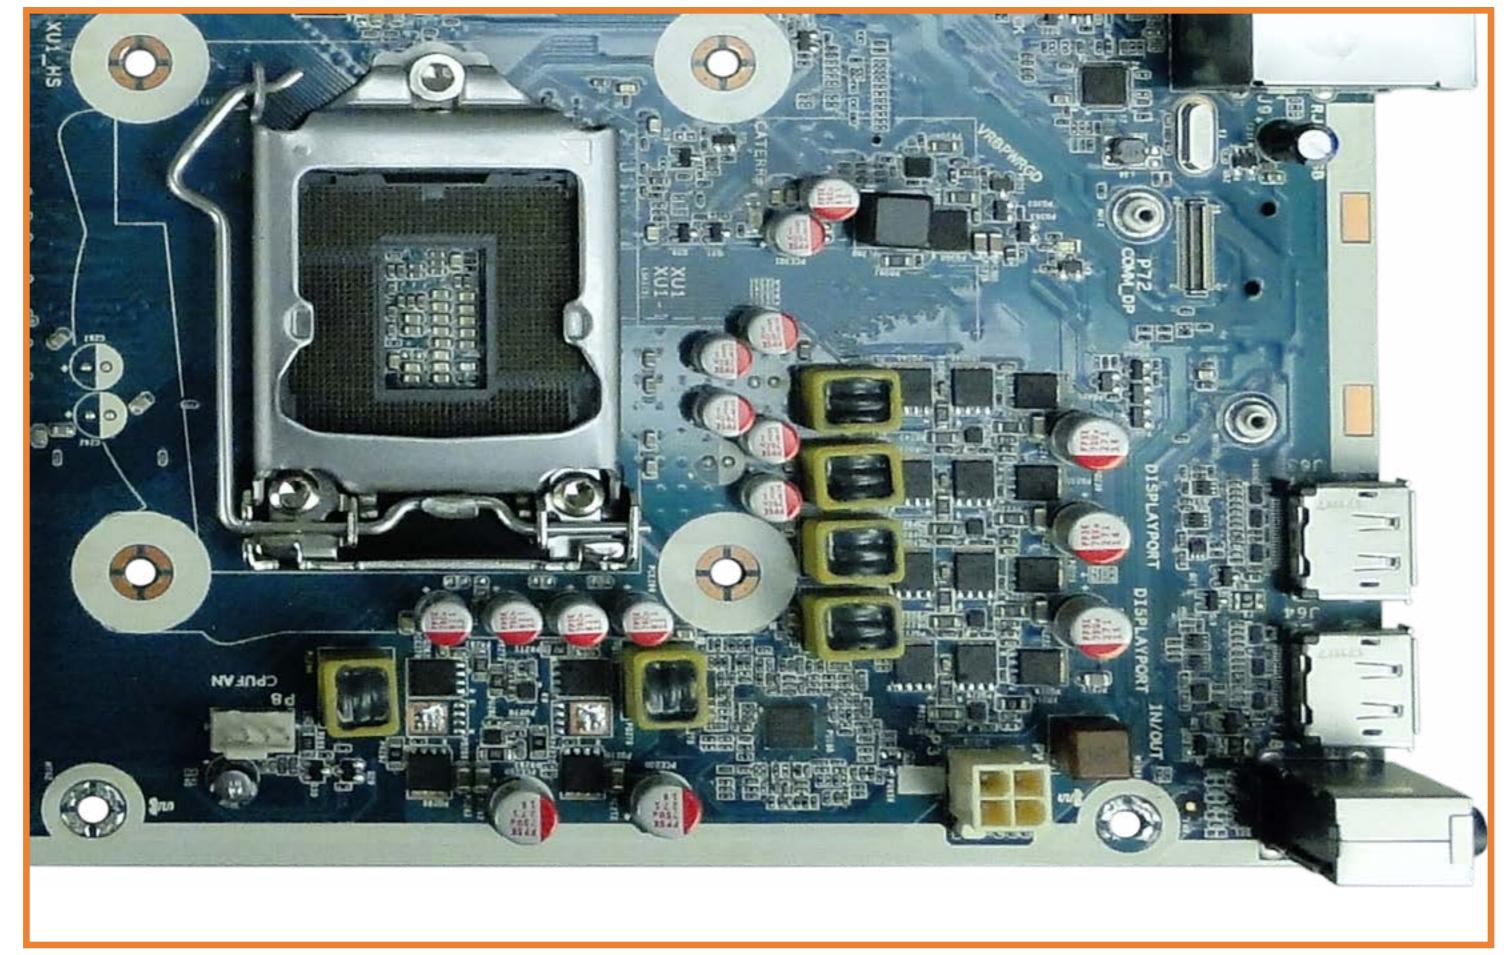




- 1. E24
- 2. SATA Power
- 3. M.2 WLAN
- 4. M.2 SSD
- 5. SATA2
- 6. SATAO
- 7. SATA3
- 8. Power Supply
- 9. CMOS Reset
- 10. PS2/Com B Header
- 11. PCI Express x4
- 12. PCI Express x1
- 13. PCI Express x16
- 14. Hood Sensor
- 15. USB 3.1 ports
- 16. Optional Serial Port
- 17. USB 2.0 ports
- 18. Hood Lock/Solenoid
- 19. Rear Fan
- 20. Optional Port
- 21. Display Port Monitor Connectors
- 22. Audio In/Out Jack
- 23. CPU Power
- 24. Processor
- 25. CPU Fan
- 26. SATA1
- 27. DIMM Slots
- 28. Battery
- 29. Speaker
- 30. Power Connector
- 31. Power Button
- 32. Headphone/Microphone Combo Jack
- 33. Headphone Jack
- 34. USB 2.0 Fast Charge
- 35. USB 2.0
- 36. USB 3.1 Gen2
- 37. USB Type-C

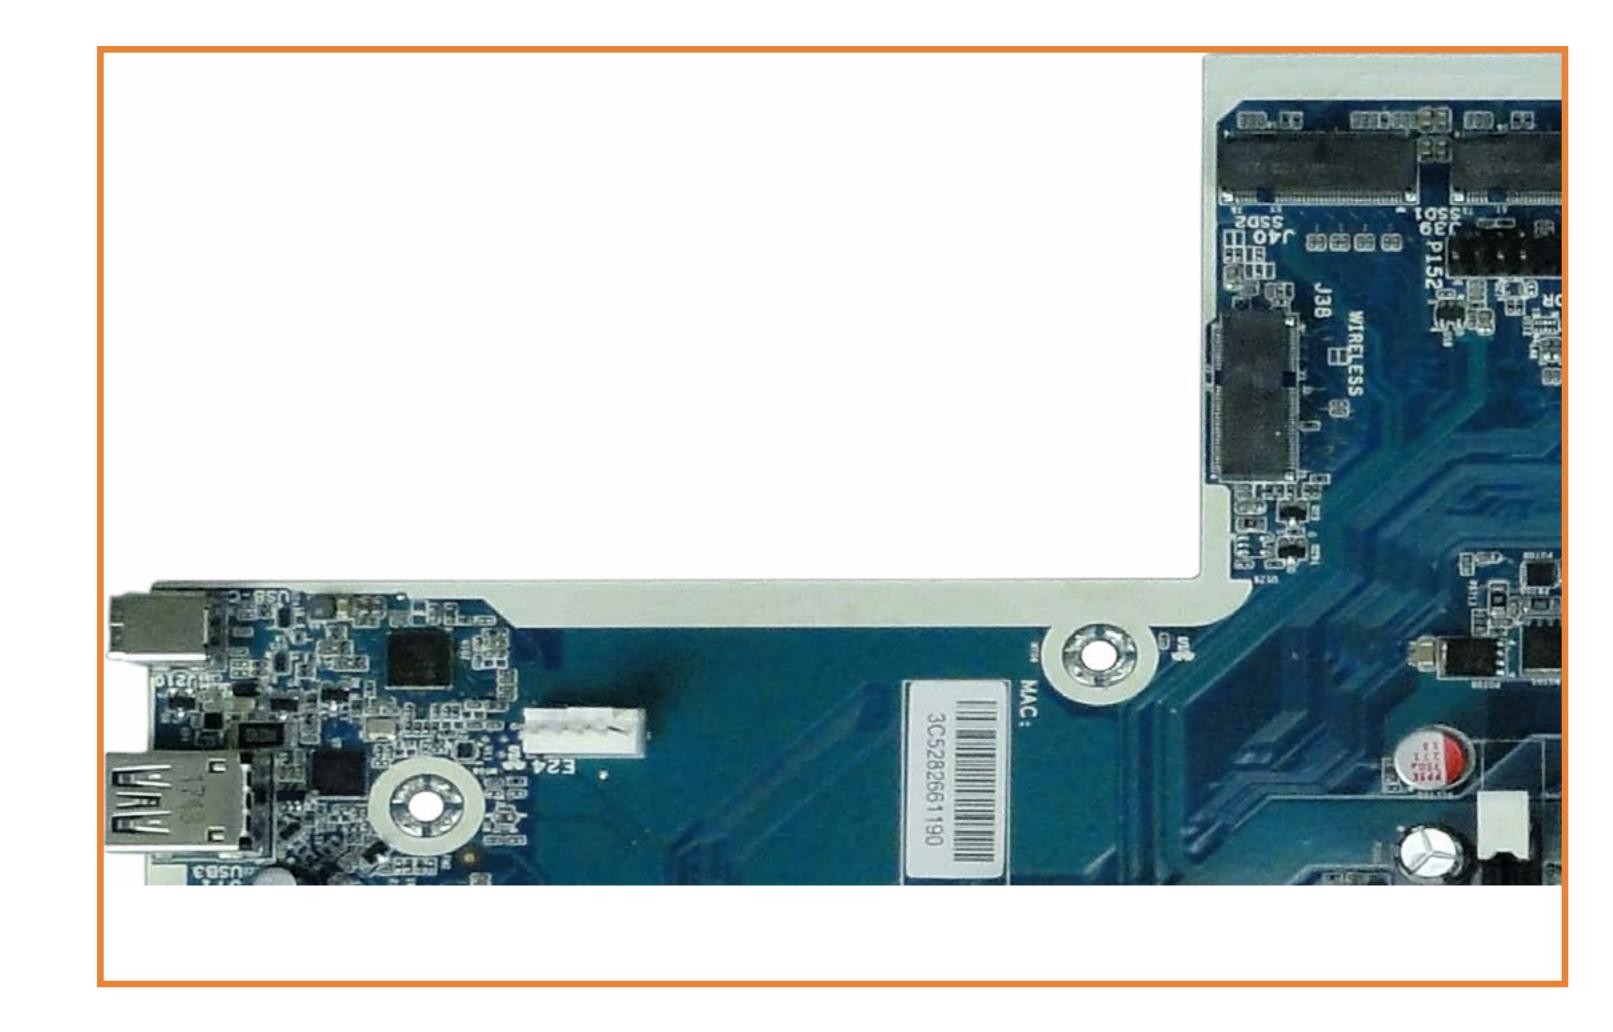


# 1

- 1. E24
- 2. SATA Power
- 3. M.2 WLAN
- 4. M.2 SSD
- 5. SATA2
- 6. SATAO
- 7. SATA3
- 8. Power Supply
- 9. CMOS Reset
- 10. PS2/Com B Header
- 11. PCI Express x4
- 12. PCI Express x1
- 13. PCI Express x16
- 14. Hood Sensor
- 15. USB 3.1 ports
- 16. Optional Serial Port
- 17. USB 2.0 ports
- 18. Hood Lock/Solenoid
- 19. Rear Fan
- 20. Optional Port
- 21. Display Port Monitor Connectors
- 22. Audio In/Out Jack
- 23. CPU Power
- 24. Processor
- 25. CPU Fan
- 26. SATA1
- 27. DIMM Slots
- 28. Battery
- 29. Speaker
- 30. Power Connector
- 31. Power Button
- 32. Headphone/Microphone Combo Jack
- 33. Headphone Jack
- 34. USB 2.0 Fast Charge
- 35. USB 2.0
- 36. USB 3.1 Gen2
- 37. USB Type-C

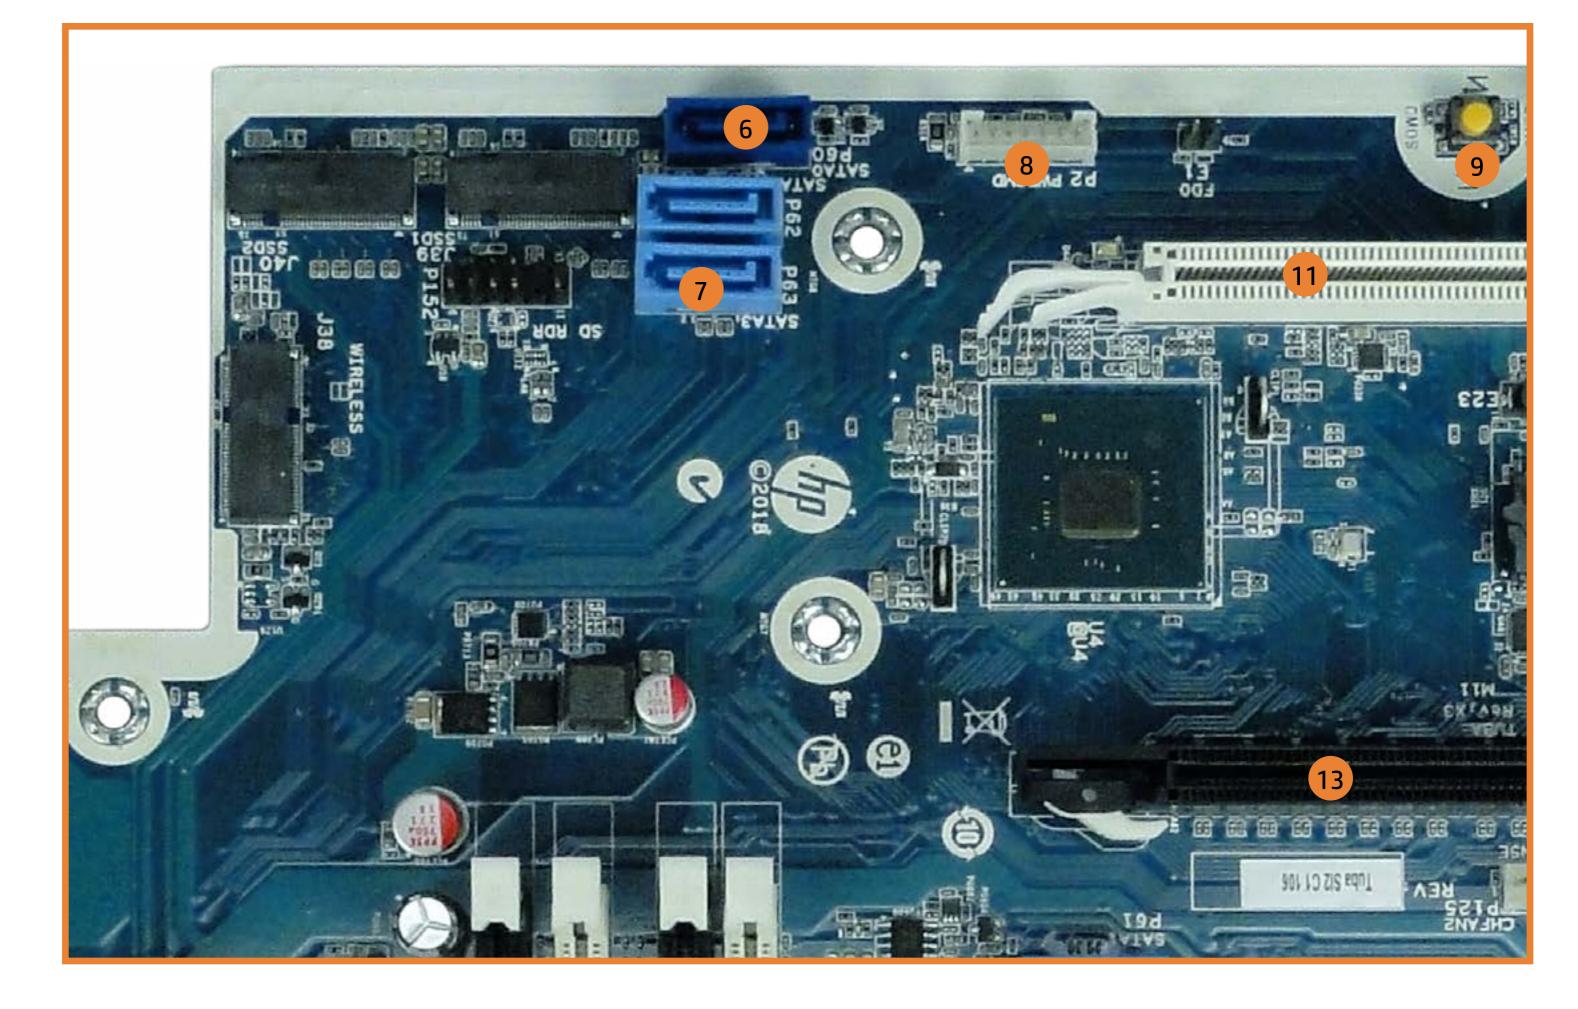

# **↑**


- 1. E24
- 2. SATA Power
- 3. M.2 WLAN
- 4. M.2 SSD
- 5. SATA2
- 6. SATAO
- 7. SATA3
- 8. Power Supply
- 9. CMOS Reset
- 10. PS2/Com B Header
- 11. PCI Express x4
- 12. PCI Express x1
- 13. PCI Express x16
- 14. Hood Sensor
- 15. USB 3.1 ports
- 16. Optional Serial Port
- 17. USB 2.0 ports
- 18. Hood Lock/Solenoid
- 19. Rear Fan
- 20. Optional Port
- 21. Display Port Monitor Connectors
- 22. Audio In/Out Jack
- 23. CPU Power
- 24. Processor
- 25. CPU Fan
- 26. SATA1
- 27. DIMM Slots
- 28. Battery
- 29. Speaker
- 30. Power Connector
- 31. Power Button
- 32. Headphone/Microphone Combo Jack
- 33. Headphone Jack
- 34. USB 2.0 Fast Charge
- 35. USB 2.0
- 36. USB 3.1 Gen2
- 37. USB Type-C

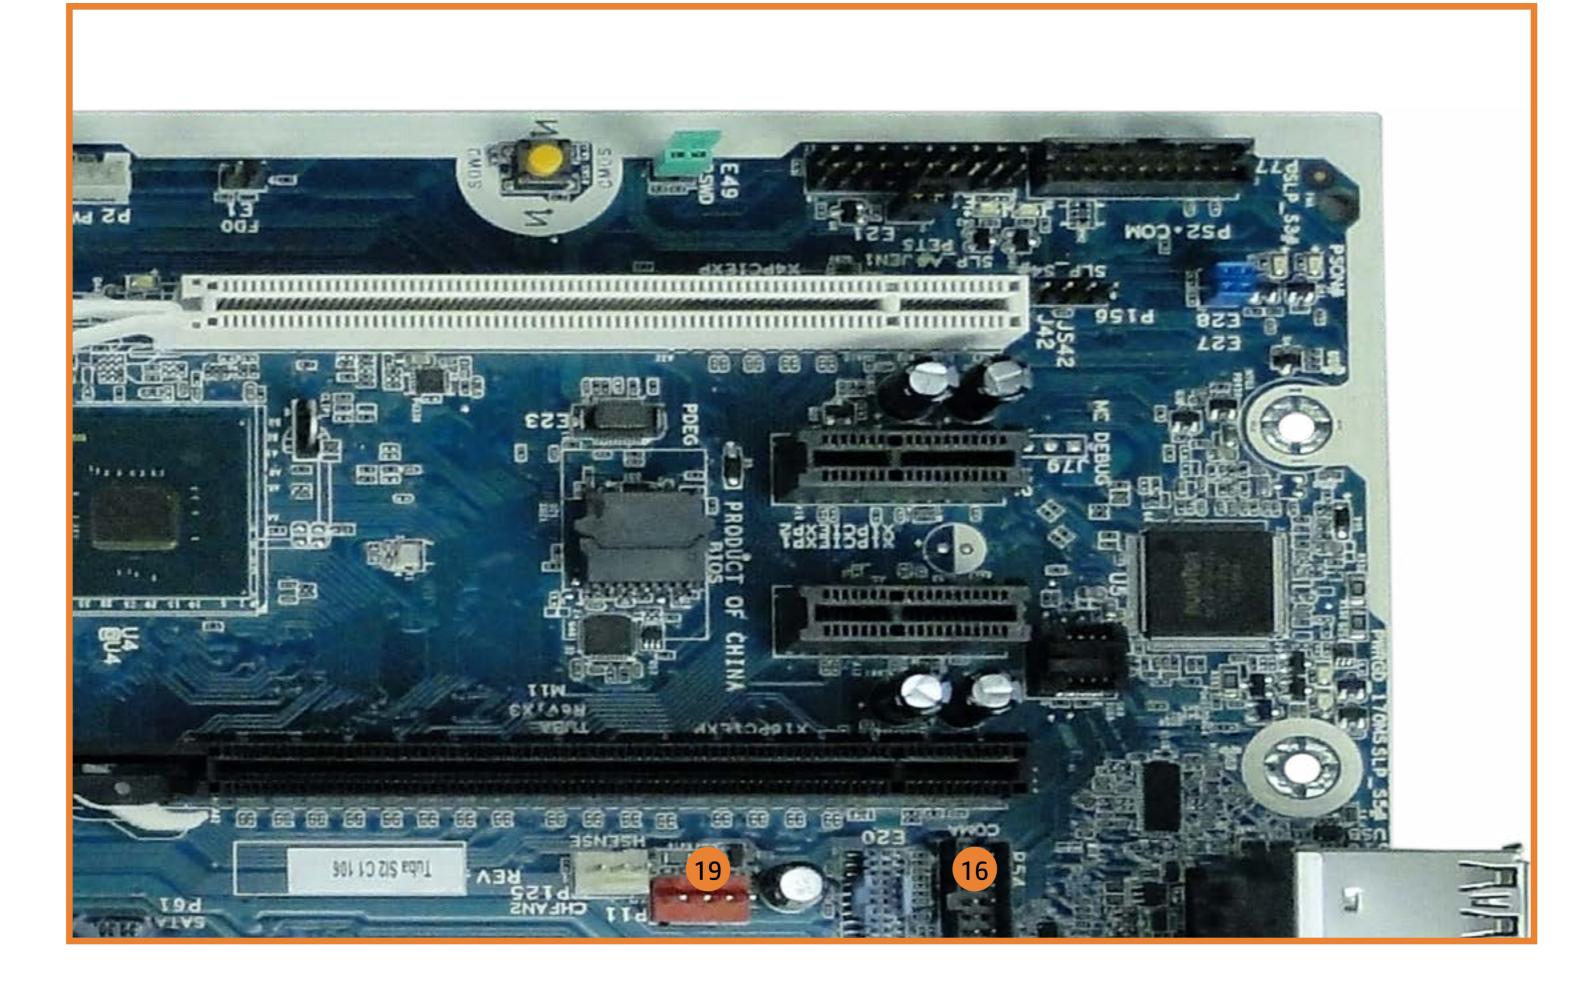





- 1. F24
- 2. SATA Power
- 3. M.2 WLAN
- 4. M.2 SSD
- 5. SATA2
- 6. SATAO
- 7. SATA3
- 8. Power Supply
- 9. CMOS Reset
- 10. PS2/Com B Header
- 11. PCI Express x4
- 12. PCI Express x1
- 13. PCI Express x16
- 14. Hood Sensor
- 15. USB 3.1 ports
- 16. Optional Serial Port
- 17. USB 2.0 ports
- 18. Hood Lock/Solenoid
- 19. Rear Fan
- 20. Optional Port
- 21. Display Port Monitor Connectors
- 22. Audio In/Out Jack
- 23. CPU Power
- 24. Processor
- 25. CPU Fan
- 26. SATA1
- 27. DIMM Slots
- 28. Battery
- 29. Speaker
- 30. Power Connector31. Power Button
- 32. Headphone/Microphone Combo Jack
- 33. Headphone Jack
- 34. USB 2.0 Fast Charge
- 35. USB 2.0
- 36. USB 3.1 Gen2
- 37. USB Type-C

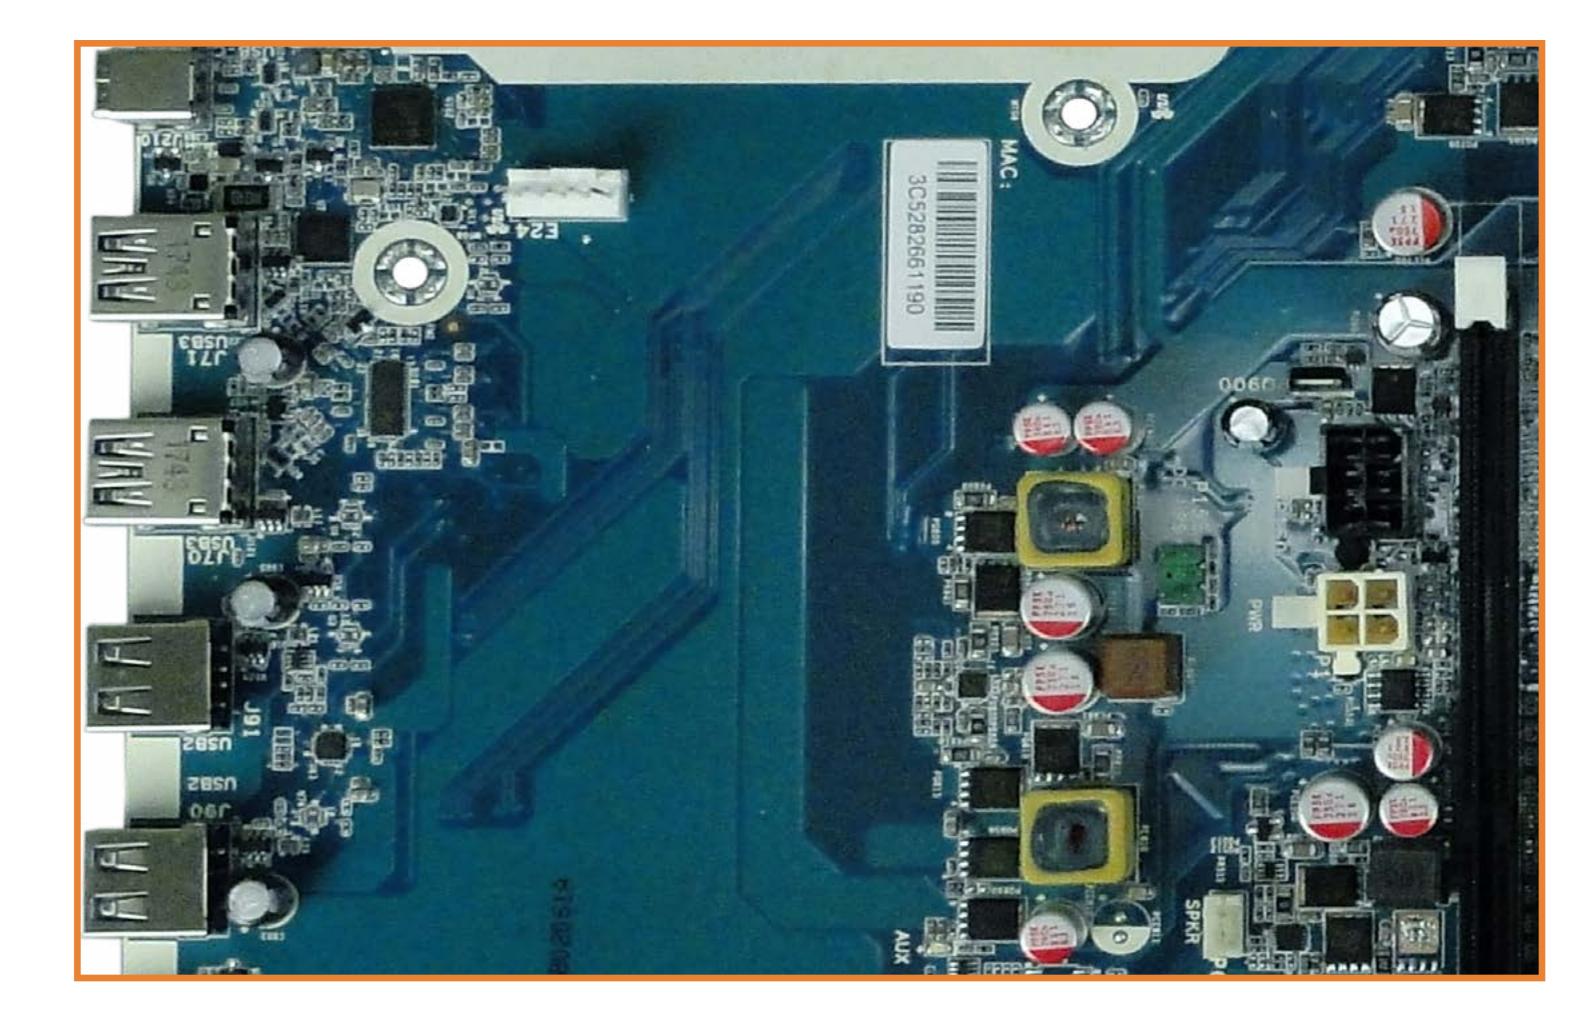

- 1. F24
- 2. SATA Power
- 3. M.2 WLAN
- 4. M.2 SSD
- 5. SATA2
- 6. SATAO
- 7. SATA3
- 8. Power Supply
- 9. CMOS Reset
- 10. PS2/Com B Header
- 11. PCI Express x4
- 12. PCI Express x1

### 13. PCI Express x16


- 14. Hood Sensor
- 15. USB 3.1 ports
- 16. Optional Serial Port
- 17. USB 2.0 ports
- 18. Hood Lock/Solenoid
- 19. Rear Fan
- 20. Optional Port
- 21. Display Port Monitor Connectors
- 22. Audio In/Out Jack
- 23. CPU Power

### 24. Processor

- 25. CPU Fan
- 26. SATA1
- 27. DIMM Slots
- 28. Battery
- 29. Speaker

### 30. Power Connector

- 31. Power Button
- 32. Headphone/Microphone Combo Jack
- 33. Headphone Jack
- 34. USB 2.0 Fast Charge
- 35. USB 2.0
- 36. USB 3.1 Gen2
- 37. USB Type-C

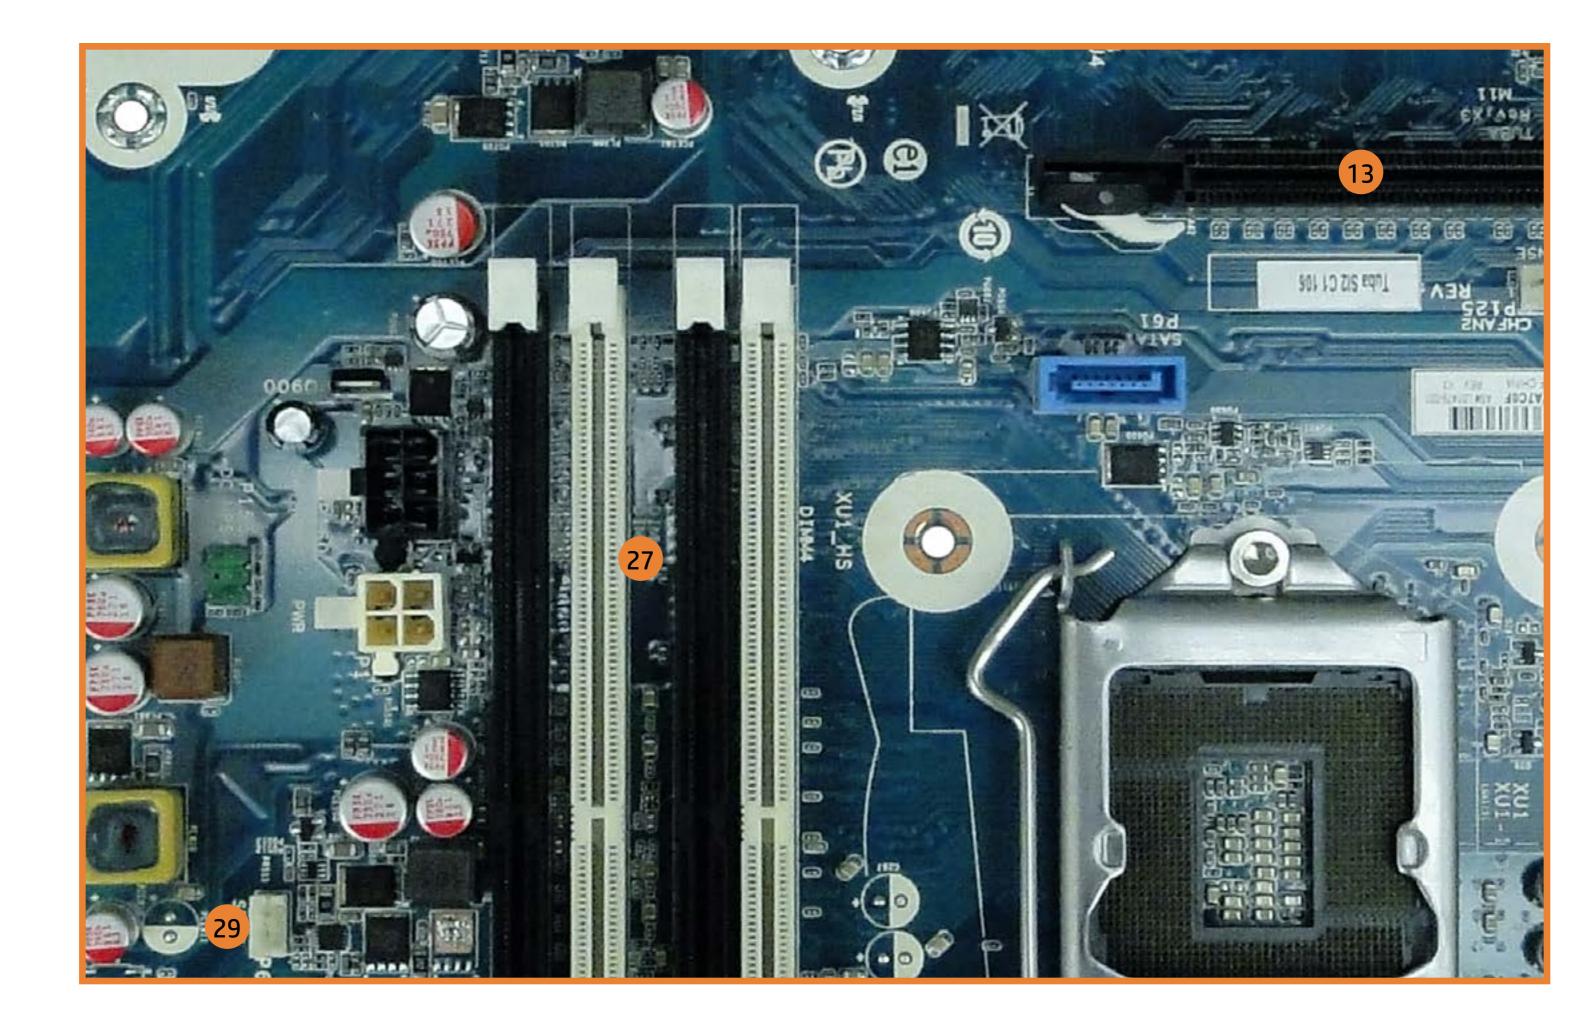





2. SATA Power

3. M.2 WLAN

4. M.2 SSD

5. SATA2

6. SATAO

7. SATA3

8. Power Supply

9. CMOS Reset

10. PS2/Com B Header

11. PCI Express x4

12. PCI Express x1

13. PCI Express x16

14. Hood Sensor

15. USB 3.1 ports

16. Optional Serial Port

17. USB 2.0 ports

18. Hood Lock/Solenoid

19. Rear Fan

20. Optional Port

21. Display Port Monitor Connectors

22. Audio In/Out Jack

23. CPU Power

24. Processor

25. CPU Fan

26. SATA1

27. DIMM Slots

28. Battery

29. Speaker

30. Power Connector

31. Power Button

32. Headphone/Microphone Combo Jack


33. Headphone Jack

34. USB 2.0 Fast Charge


35. USB 2.0


36. USB 3.1 Gen2

37. USB Type-C

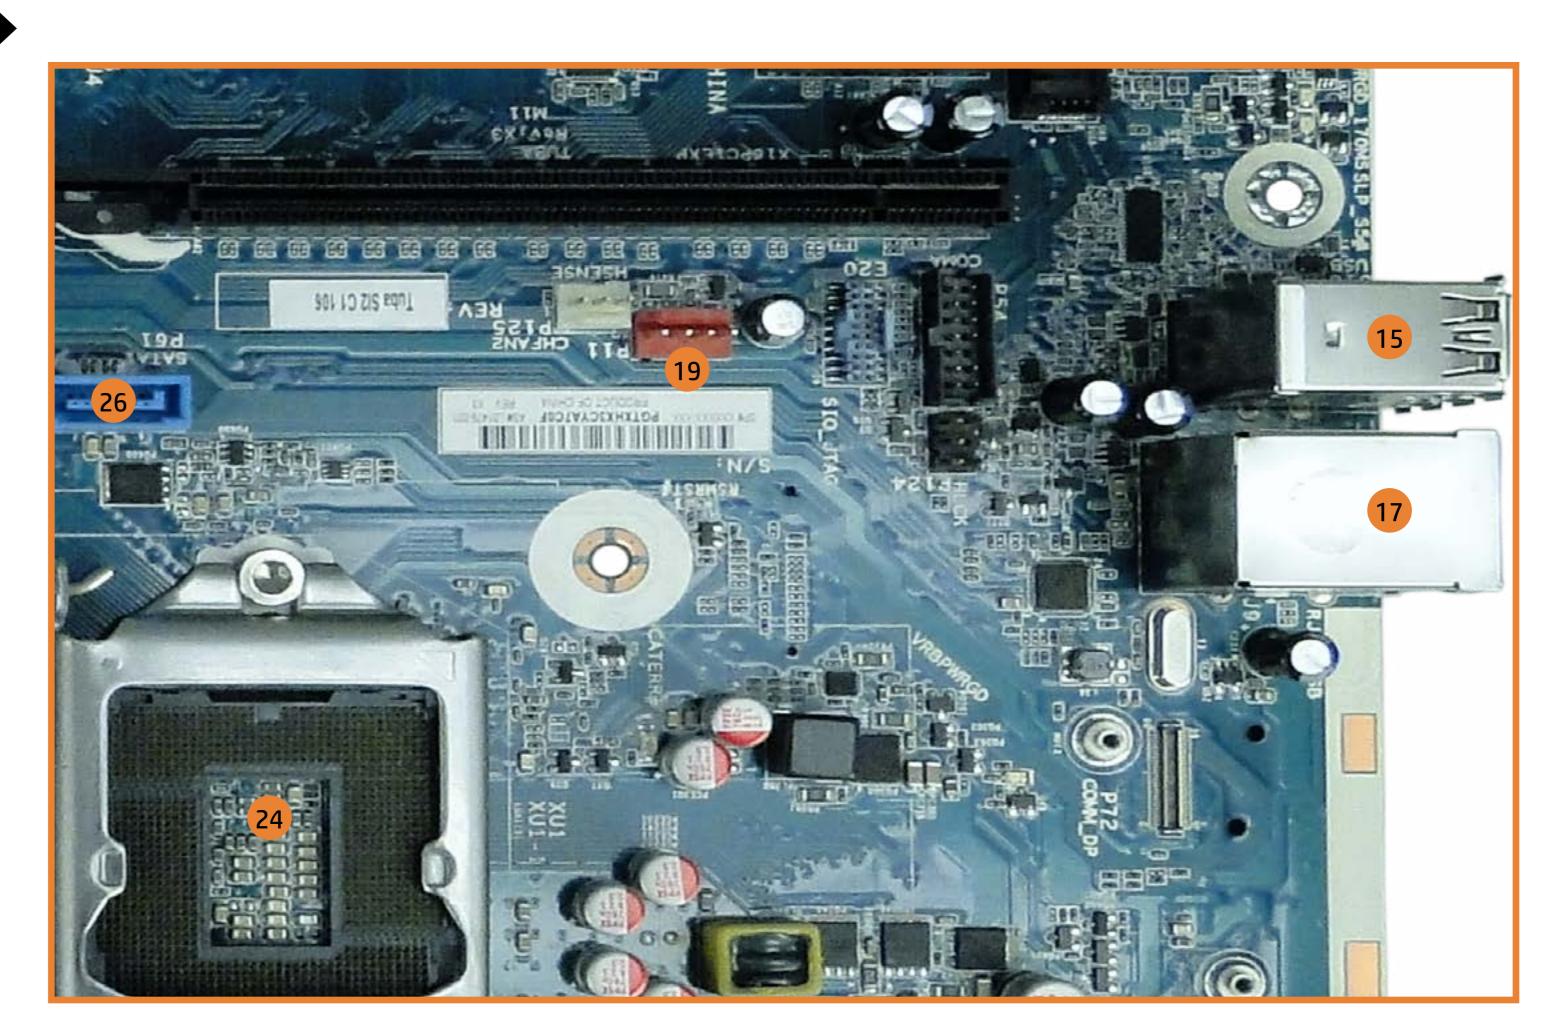









- 1. E24
- 2. SATA Power
- 3. M.2 WLAN
- 4. M.2 SSD
- 5. SATA2
- 6. SATAO
- 7. SATA3
- 8. Power Supply
- 9. CMOS Reset
- 10. PS2/Com B Header
- 11. PCI Express x4
- 12. PCI Express x1
- 13. PCI Express x16
- 14. Hood Sensor
- 15. USB 3.1 ports
- 16. Optional Serial Port
- 17. USB 2.0 ports
- 18. Hood Lock/Solenoid
- 19. Rear Fan
- 20. Optional Port
- 21. Display Port Monitor Connectors
- 22. Audio In/Out Jack
- 23. CPU Power
- 24. Processor
- 25. CPU Fan
- 26. SATA1
- 27. DIMM Slots
- 28. Battery
- 29. Speaker
- 30. Power Connector
- 31. Power Button
- 32. Headphone/Microphone Combo Jack
- 33. Headphone Jack
- 34. USB 2.0 Fast Charge
- 35. USB 2.0
- 36. USB 3.1 Gen2
- 37. USB Type-C

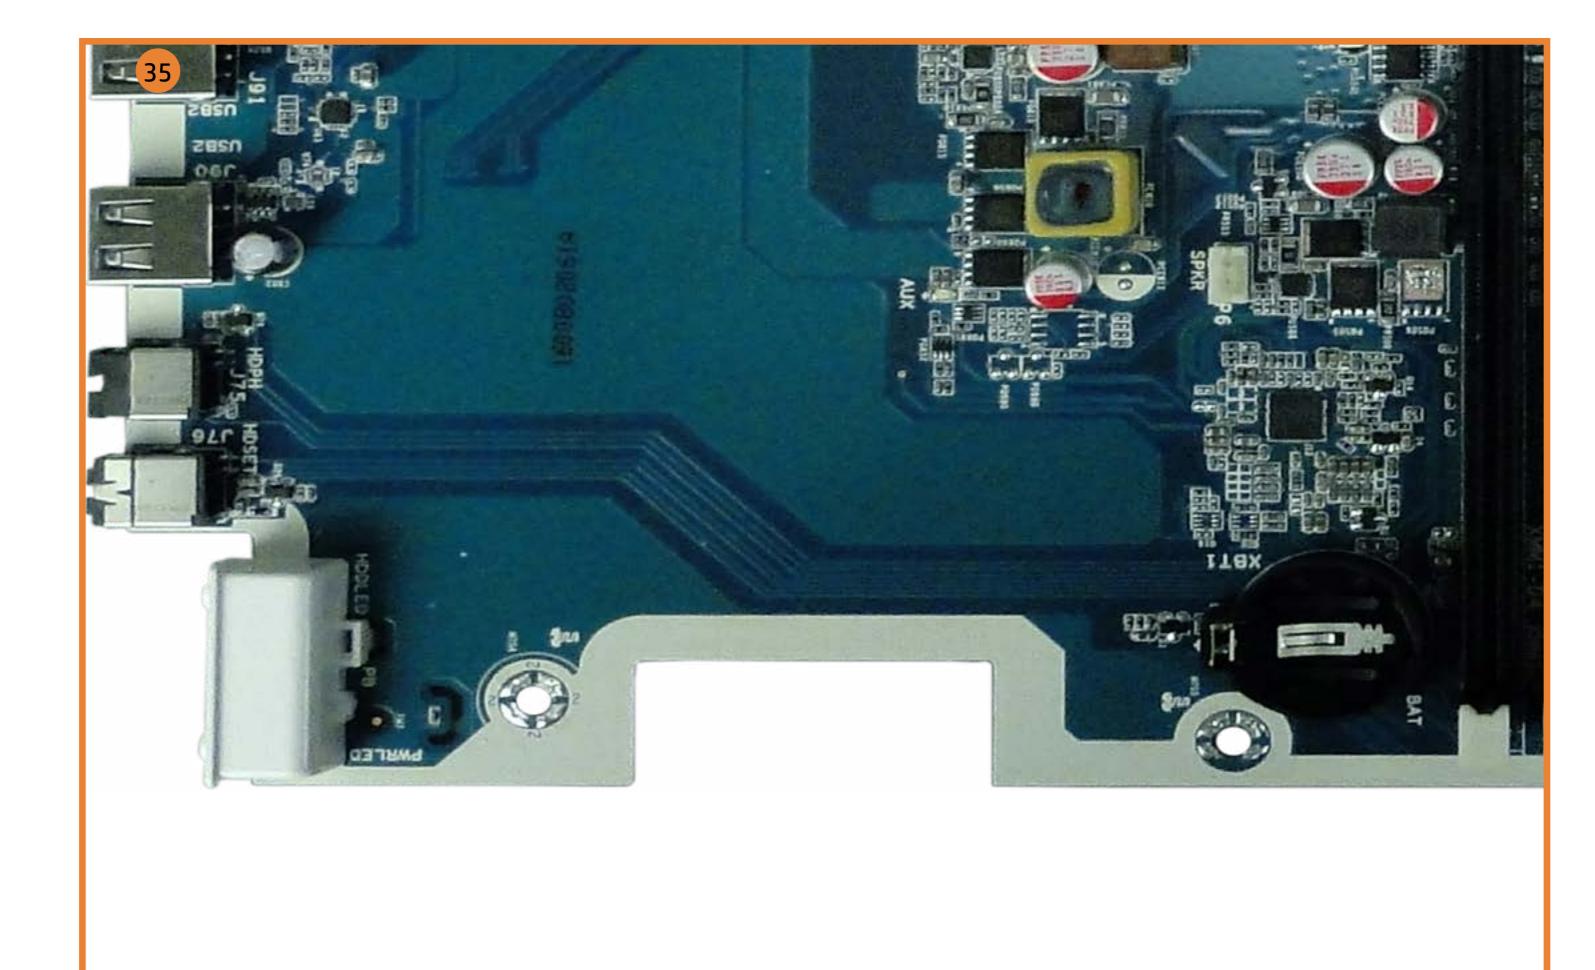




### 1. E24

- 2. SATA Power
- 3. M.2 WLAN
- 4. M.2 SSD
- 5. SATA2
- 6. SATA0
- 7. SATA3
- 8. Power Supply
- 9. CMOS Reset
- 10. PS2/Com B Header
- 11. PCI Express x4
- 12. PCI Express x1
- 13. PCI Express x16
- 14. Hood Sensor
- 15. USB 3.1 ports
- 16. Optional Serial Port
- 17. USB 2.0 ports
- 18. Hood Lock/Solenoid
- 19. Rear Fan
- 20. Optional Port
- 21. Display Port Monitor Connectors
- 22. Audio In/Out Jack
- 23. CPU Power
- 24. Processor
- 25. CPU Fan
- 26. SATA1
- 27. DIMM Slots
- 28. Battery
- 29. Speaker
- 30. Power Connector
- 31. Power Button
- 32. Headphone/Microphone Combo Jack
- 33. Headphone Jack
- 34. USB 2.0 Fast Charge
- 35. USB 2.0
- 36. USB 3.1 Gen2
- 37. USB Type-C

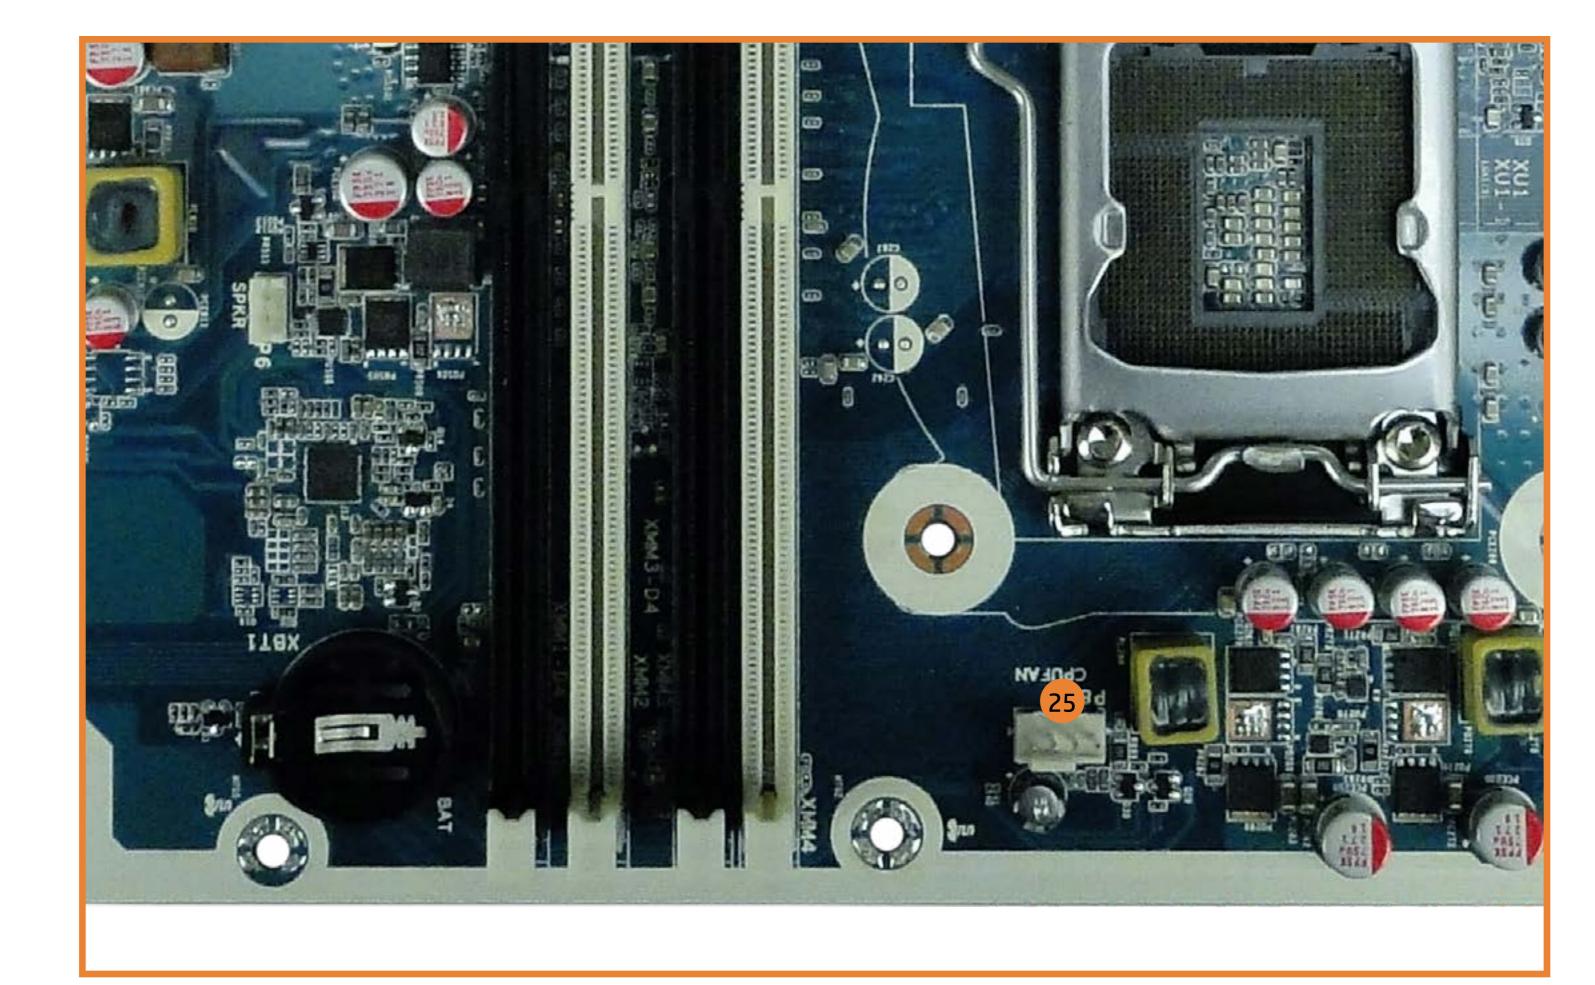



- 1. E24
- 2. SATA Power
- 3. M.2 WLAN
- 4. M.2 SSD
- 5. SATA2
- 6. SATAO
- 7. SATA3
- 8. Power Supply
- 9. CMOS Reset
- 10. PS2/Com B Header
- 11. PCI Express x4
- 12. PCI Express x1
- 13. PCI Express x16
- 14. Hood Sensor
- 15. USB 3.1 ports
- 16. Optional Serial Port
- 17. USB 2.0 ports
- 18. Hood Lock/Solenoid
- 19. Rear Fan
- 20. Optional Port
- 21. Display Port Monitor Connectors
- 22. Audio In/Out Jack
- 23. CPU Power
- 24. Processor
- 25. CPU Fan26. SATA1
- 27. DIMM Slots
- 28. Battery
- 29. Speaker
- 30. Power Connector
- 31. Power Button
- 32. Headphone/Microphone Combo Jack
- 33. Headphone Jack
- 34. USB 2.0 Fast Charge
- 35. USB 2.0
- 36. USB 3.1 Gen2
- 37. USB Type-C

