

Redes Industriales

Código(14541)

GIROB-RIN


Práctica Encaminamiento en Internet

Material basado en las notas de la asignatura: AMPLIACIÓN DE SISTEMAS OPERATIVOS Y REDES

Grados Ingeniería en Informática Universidad Complutense de Madrid

PROFESORES:

Rafael Moreno Vozmediano Rubén Santiago Montero Juan Carlos Fabero Jiménez

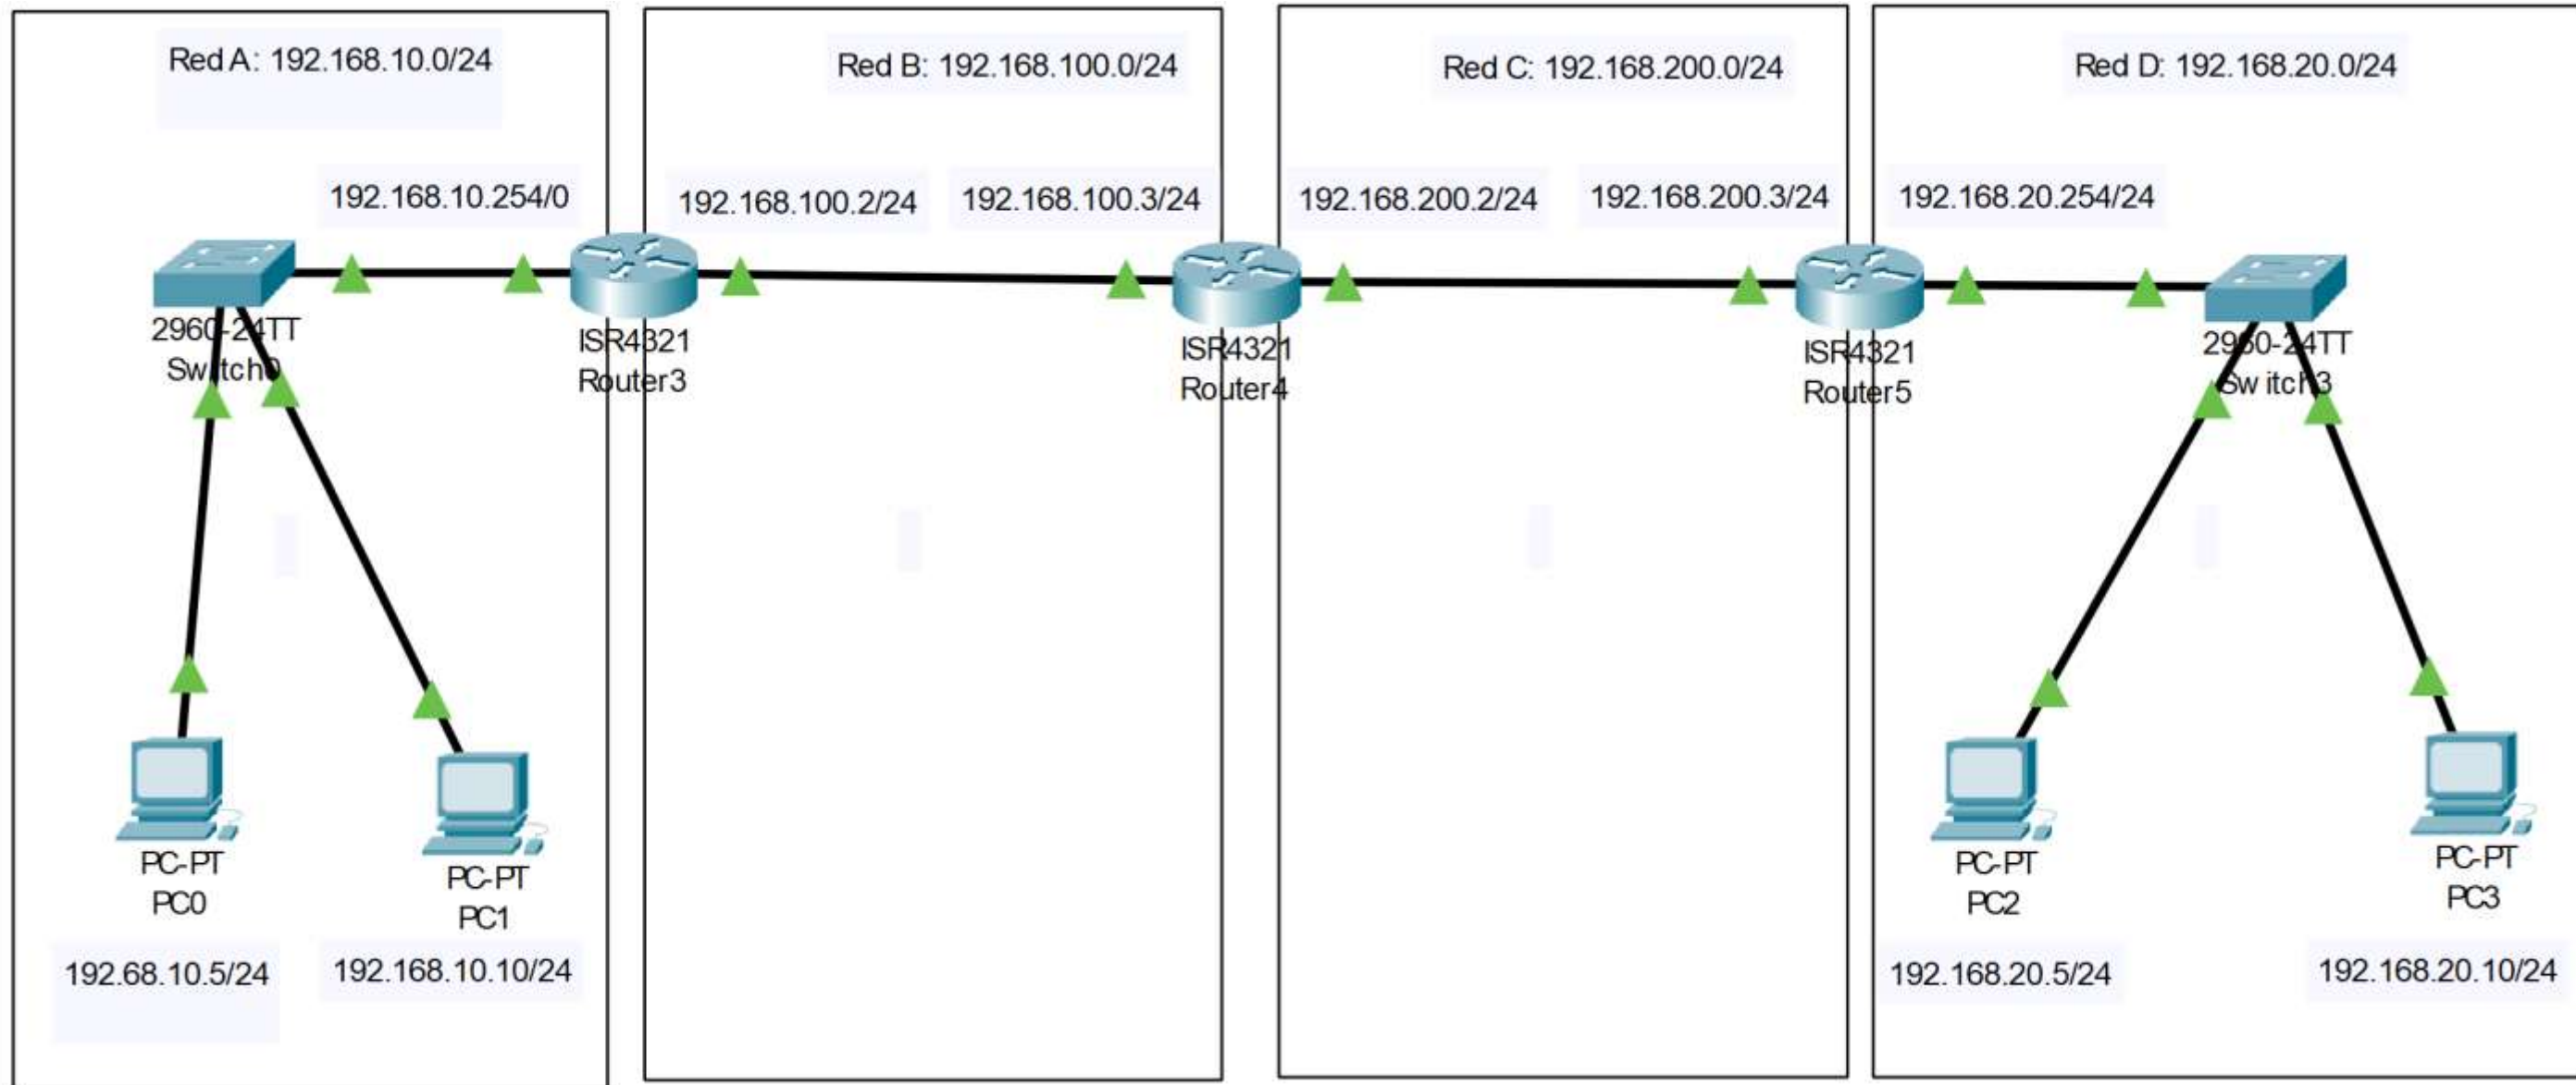


Encaminamiento estático: Primera solución




Network Address

0.0.0.0/0 vía 192.168.100.3

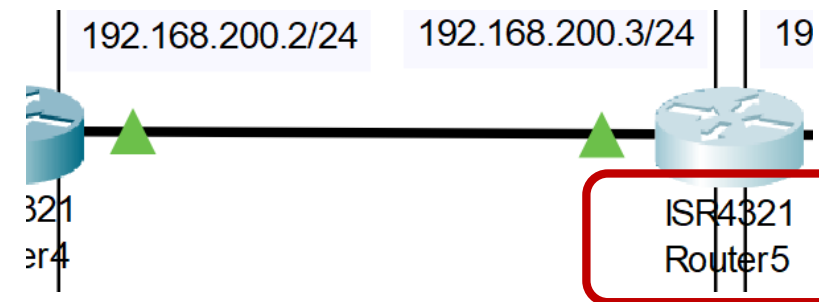

Network Address

0.0.0.0/0 vía 192.168.200.2

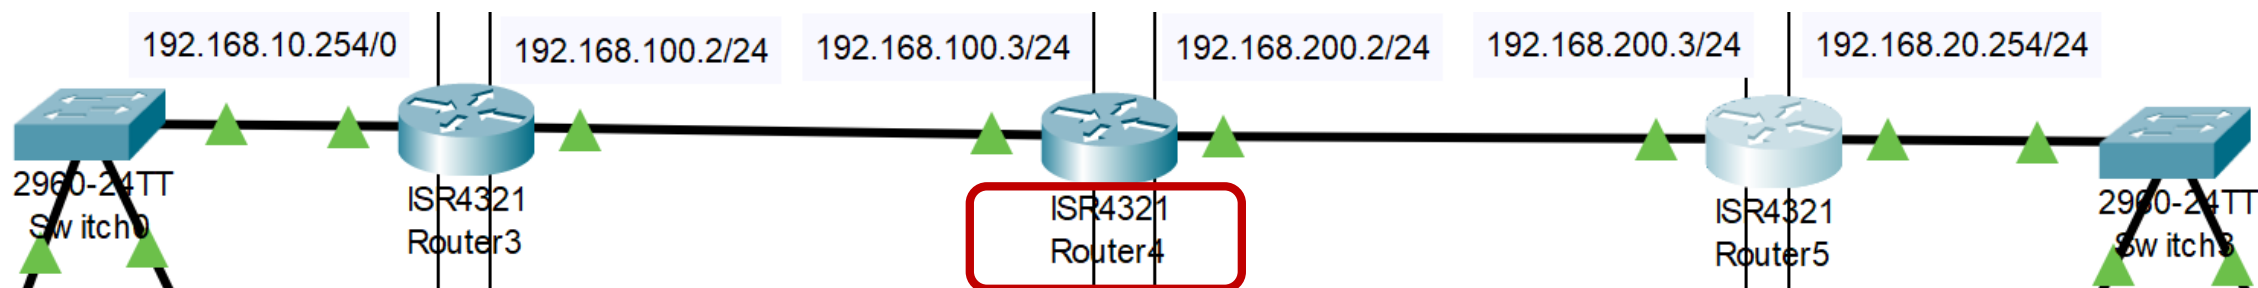


Network Address

192.168.10.0/24 vía 192.168.100.2

192.168.20.0/24 vía 192.168.200.3

Encaminamiento estático: Segunda solución

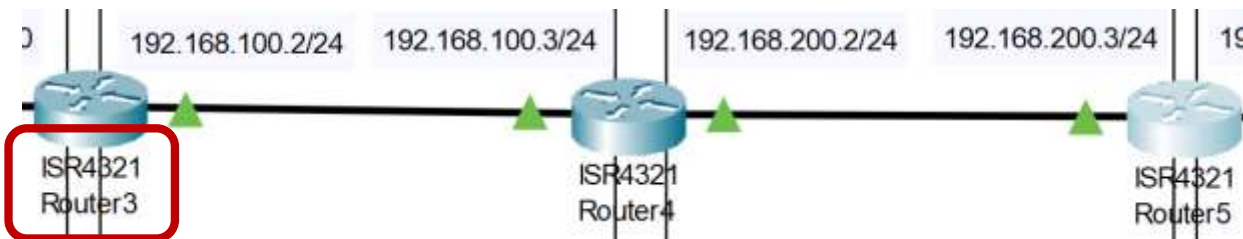


Network Address

192.168.20.0/24 vía 192.168.100.3
192.168.200.0/24 vía 192.168.100.3

Network Address

192.168.10.0/0 vía 192.168.200.2
192.168.100.0/32 vía 192.168.200.2

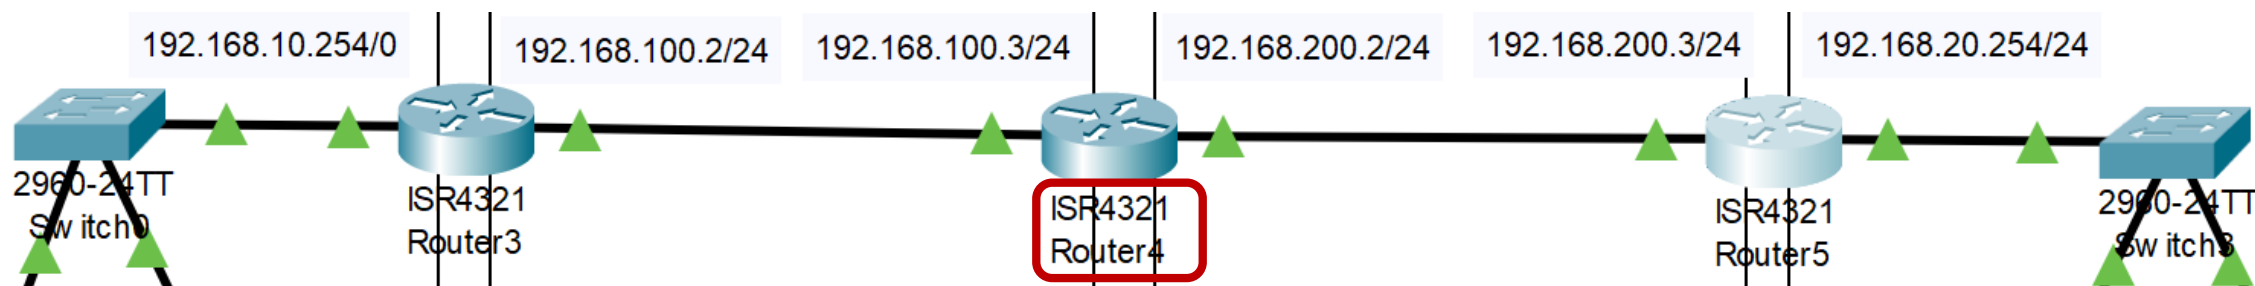

Network Address

192.168.10.0/24 vía 192.168.100.2
192.168.20.0/24 vía 192.168.200.3

```
Router>
Router>
Router>enable
Router#configure terminal
Enter configuration commands, one per line. End with CNTL/Z.
Router(config)#router rip
Router(config-router)#version 2
Router(config-router)#no auto-summary
Router(config-router)#network 192.168.10.0
Router(config-router)#network 10.10.10.0
Router(config-router)#network 10.10.30.0
Router(config-router)#passive-interface g0/0
Router(config-router)#default-information originate
Router(config-router)#end
Router#
%SYS-5-CONFIG_I: Configured from console by console

Router#wr
Building configuration...
[OK]
Router#show ip protocols
Routing Protocol is "rip"
Sending updates every 30 seconds, next due in 7 seconds
Invalid after 180 seconds, hold down 180, flushed after 240
Outgoing update filter list for all interfaces is not set
Incoming update filter list for all interfaces is not set
Redistributing: rip
Default version control: send version 2, receive 2
  Interface          Send Recv Triggered RIP Key-chain
Automatic network summarization is not in effect
Maximum path: 4
Routing for Networks:
  10.0.0.0
  192.168.10.0
Passive Interface(s):
  GigabitEthernet0/0
Routing Information Sources:
  Gateway         Distance      Last Update
Distance: (default is 120)
Router#
```

enable
configure terminal
router rip
version 2
no auto-summary
network 192.168.10.0
network 10.10.10.0
network 10.10.30.0
passive-interface g0/0
default-information originate
end
wr
show ip protocols

```
Router>
Router>
Router>
Router>enable
Router#configure terminal
Enter configuration commands, one per line.  End with CNTL/Z.
Router(config)#router rip
Router(config-router)#version 2
Router(config-router)#network 10.10.20.0
Router(config-router)#network 10.10.30.0
Router(config-router)#default-information originate
Router(config-router)#end
Router#
%SYS-5-CONFIG_I: Configured from console by console
wr
Building configuration...
[OK]
Router#show ip protocols
Routing Protocol is "rip"
  Sending updates every 30 seconds, next due in 7 seconds
  Invalid after 180 seconds, hold down 180, flushed after 240
  Outgoing update filter list for all interfaces is not set
  Incoming update filter list for all interfaces is not set
  Redistributing: rip
  Default version control: send version 2, receive 2
    Interface          Send Recv Triggered RIP Key-chain
  Automatic network summarization is in effect
  Maximum path: 4
  Routing for Networks:
    10.0.0.0
  Passive Interface(s):
  Routing Information Sources:
    Gateway         Distance      Last Update
  Distance: (default is 120)
Router#
```

enable
configure terminal
router rip
version 2
no auto-summary
network 10.10.20.0
network 10.10.30.0
default-information originate
end
wr
show ip protocols


```
Router>
Router>enable
Router#configure terminal
Enter configuration commands, one per line. End with CNTL/Z.
Router(config)#router rip
Router(config-router)#version 2
Router(config-router)#no auto-summary
Router(config-router)#network 10.10.10.0
Router(config-router)#network 10.10.40.0
Router(config-router)#network 10.10.20.0
Router(config-router)#default-information originate
Router(config-router)#end
Router#
%SYS-5-CONFIG_I: Configured from console by console

Router#wr
Building configuration...
[OK]
Router#
Router#show ip protocols
Routing Protocol is "rip"
Sending updates every 30 seconds, next due in 21 seconds
Invalid after 180 seconds, hold down 180, flushed after 240
Outgoing update filter list for all interfaces is not set
Incoming update filter list for all interfaces is not set
Redistributing: rip
Default version control: send version 2, receive 2
  Interface          Send Recv Triggered RIP Key-chain
Automatic network summarization is not in effect
Maximum path: 4
Routing for Networks:
    10.0.0.0
Passive Interface(s):
Routing Information Sources:
    Gateway         Distance      Last Update
Distance: (default is 120)
Router#
```

enable
configure terminal
router rip
version 2
no auto-summary
network 10.10.10.0
network 10.10.20.0
network 10.10.40.0
default-information originate
end
wr
show ip protocols

```
Router>enable
Router#configure terminal
Enter configuration commands, one per line.  End with CNTL/Z.
Router(config)#router rip
Router(config-router)#version 2
Router(config-router)#no auto-summary
Router(config-router)#network 192.168.20.0
Router(config-router)#network 10.10.40.0
Router(config-router)#passive-interface g0/1
Router(config-router)#default-information originate
Router(config-router)#end
Router#
%SYS-5-CONFIG_I: Configured from console by console
wr
Building configuration...
[OK]
Router#show ip protocols
Routing Protocol is "rip"
  Sending updates every 30 seconds, next due in 11 seconds
  Invalid after 180 seconds, hold down 180, flushed after 240
  Outgoing update filter list for all interfaces is not set
  Incoming update filter list for all interfaces is not set
  Redistributing: rip
  Default version control: send version 2, receive 2
    Interface          Send Recv Triggered RIP Key-chain
  Automatic network summarization is not in effect
  Maximum path: 4
  Routing for Networks:
    10.0.0.0
    192.168.20.0
  Passive Interface(s):
    GigabitEthernet0/1
  Routing Information Sources:
    Gateway         Distance      Last Update
  Distance: (default is 120)
Router#exit
```

enable
configure terminal
router rip
version 2
no auto-summary
network 192.168.20.0
network 10.10.40.0
passive-interface g0/1
default-information originate
end
wr
show ip protocols

Infraestructura Informática para Centros de Datos (ICD) (Código 14534) Ejemplo Encaminamiento Packet Tracer
