

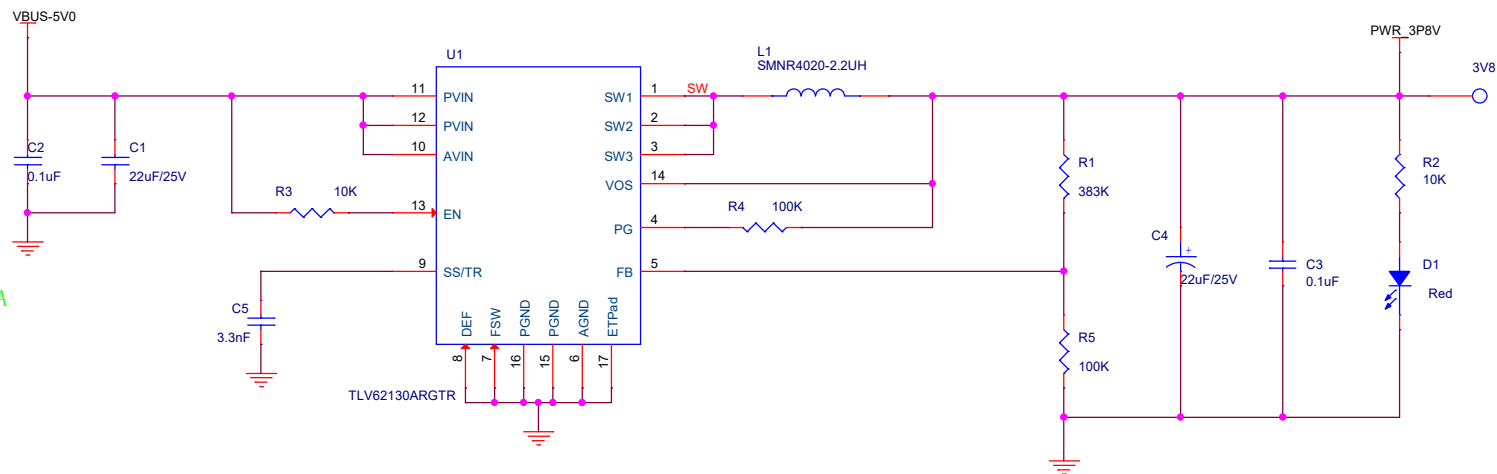


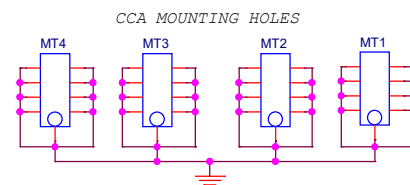





核心板电源输入电压范围：5v - 17v@1A




$$FB=0.8V$$
$$VOUT = 3.86V = (0.8V / 100K) * (100K + 383K)$$

M.2 封装的5G模块供电范围是3.3V - 4.4V
设计电压时3.8V-3.9V

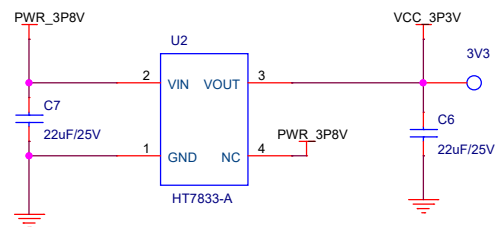


北京传承互联科技有限公司		
Title		
5G_M2_To_RJ45-USB3		
Size	Document Number	Rev
B		2.1
Date:	Sunday, June 02, 2024	Sheet 1 of 4

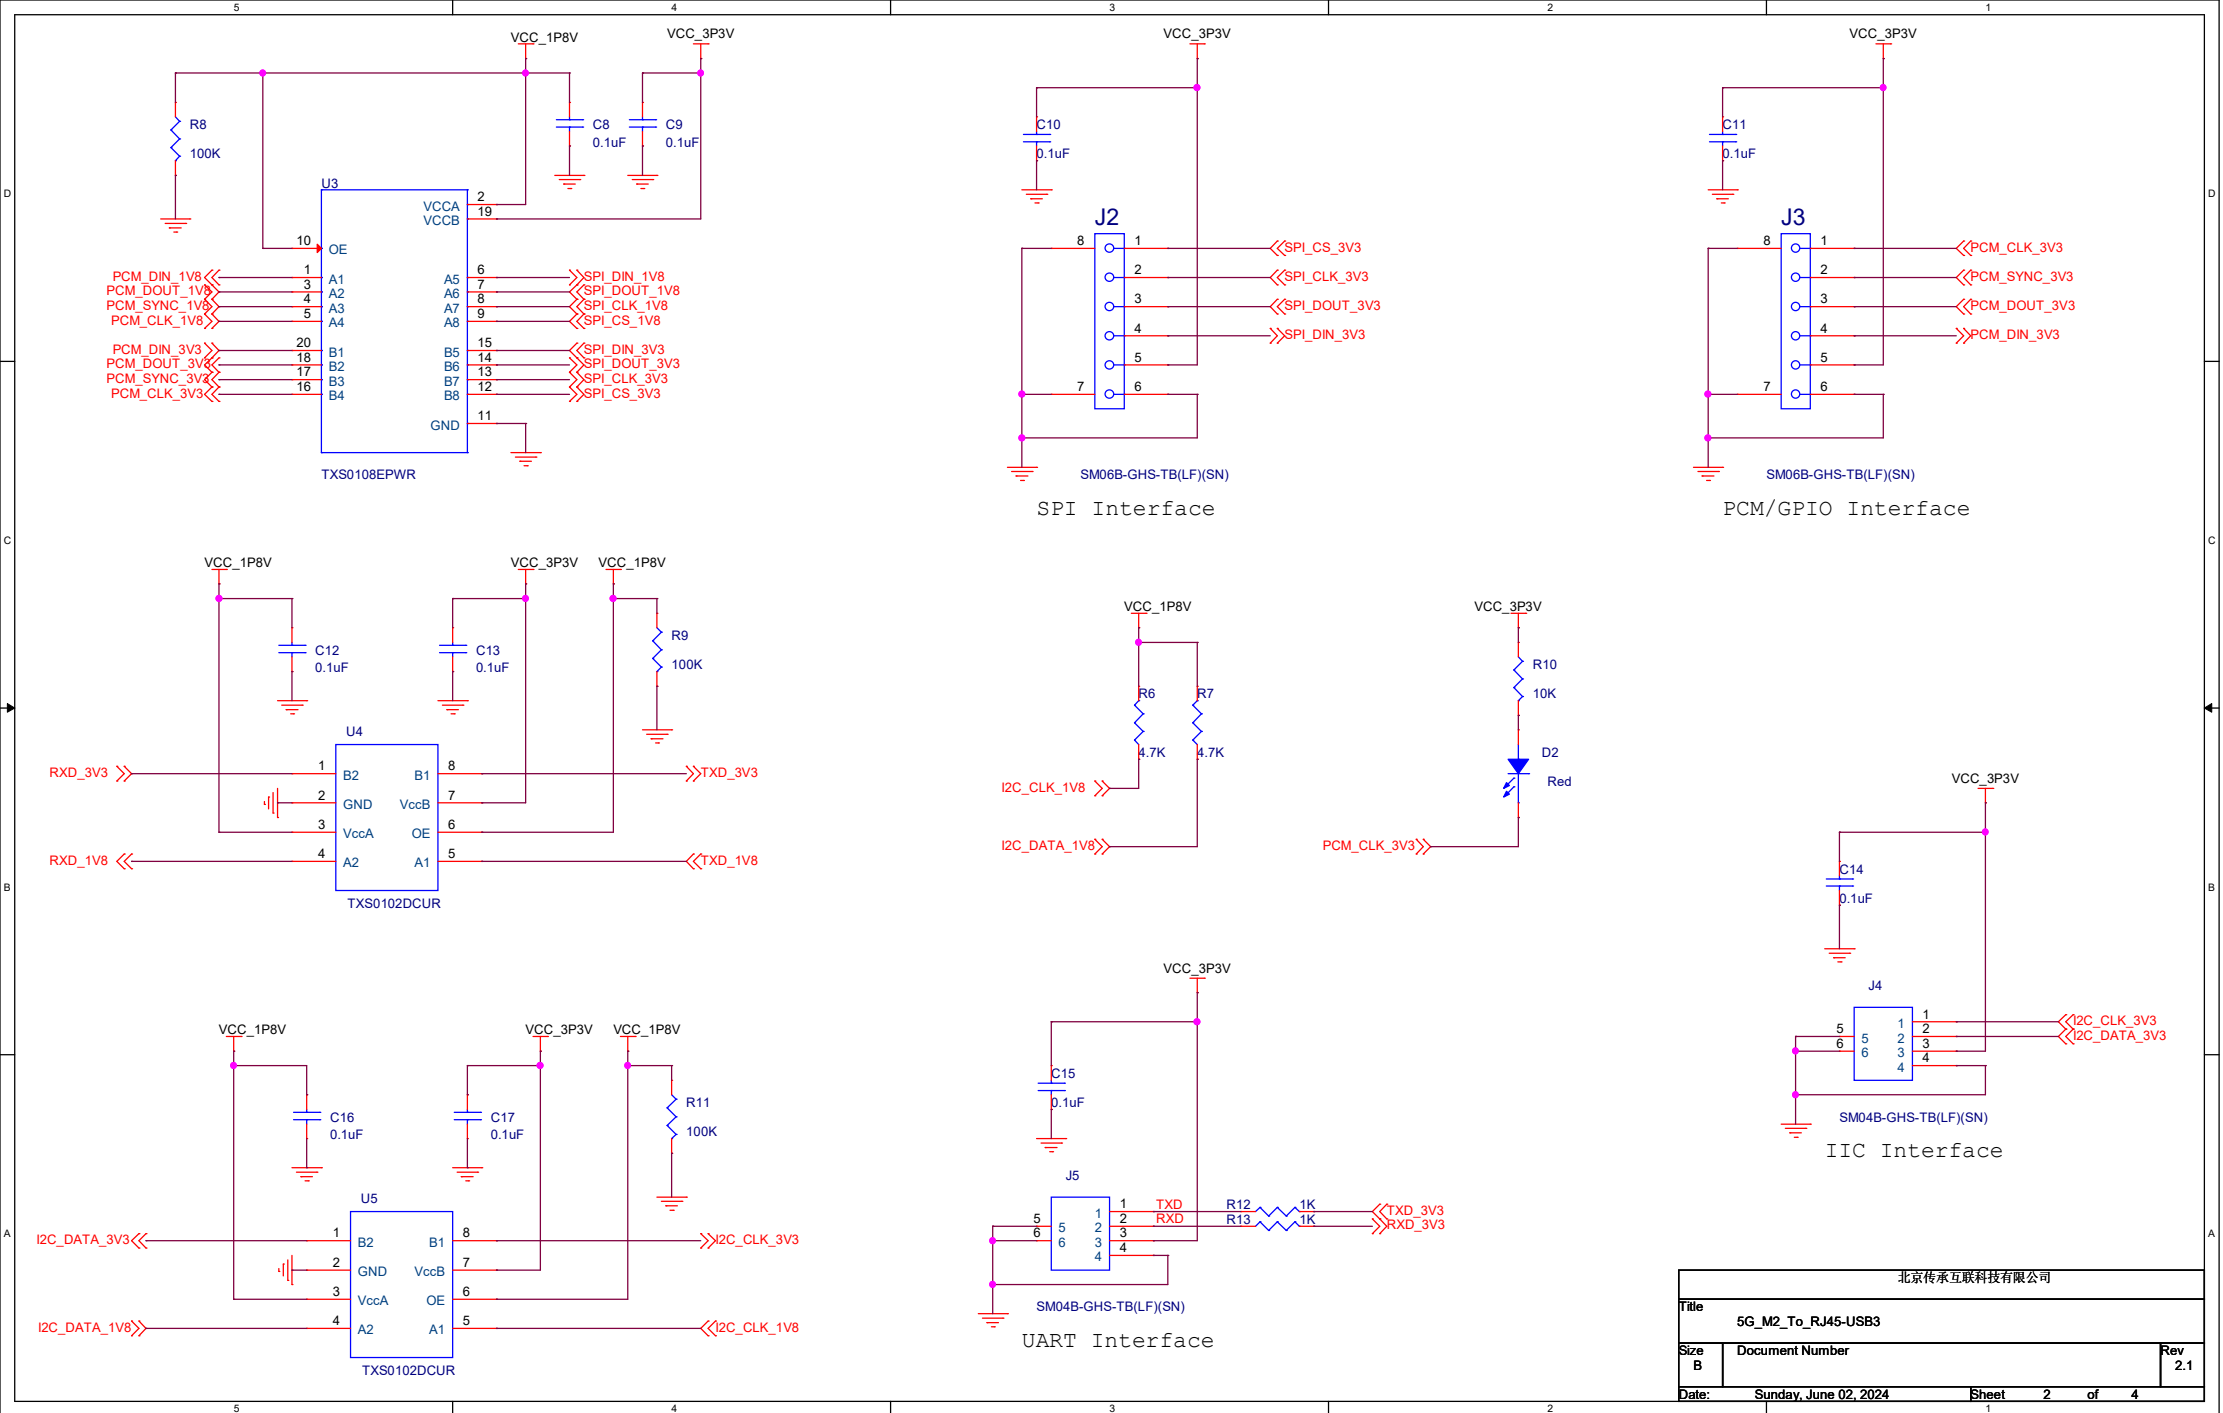

IV

Title					5G_M2_To_RJ45-USB3							
Size		Document Number					Rev					
B							2.1					
Date:		Sunday, June 02, 2024			Sheet		3		of		4	

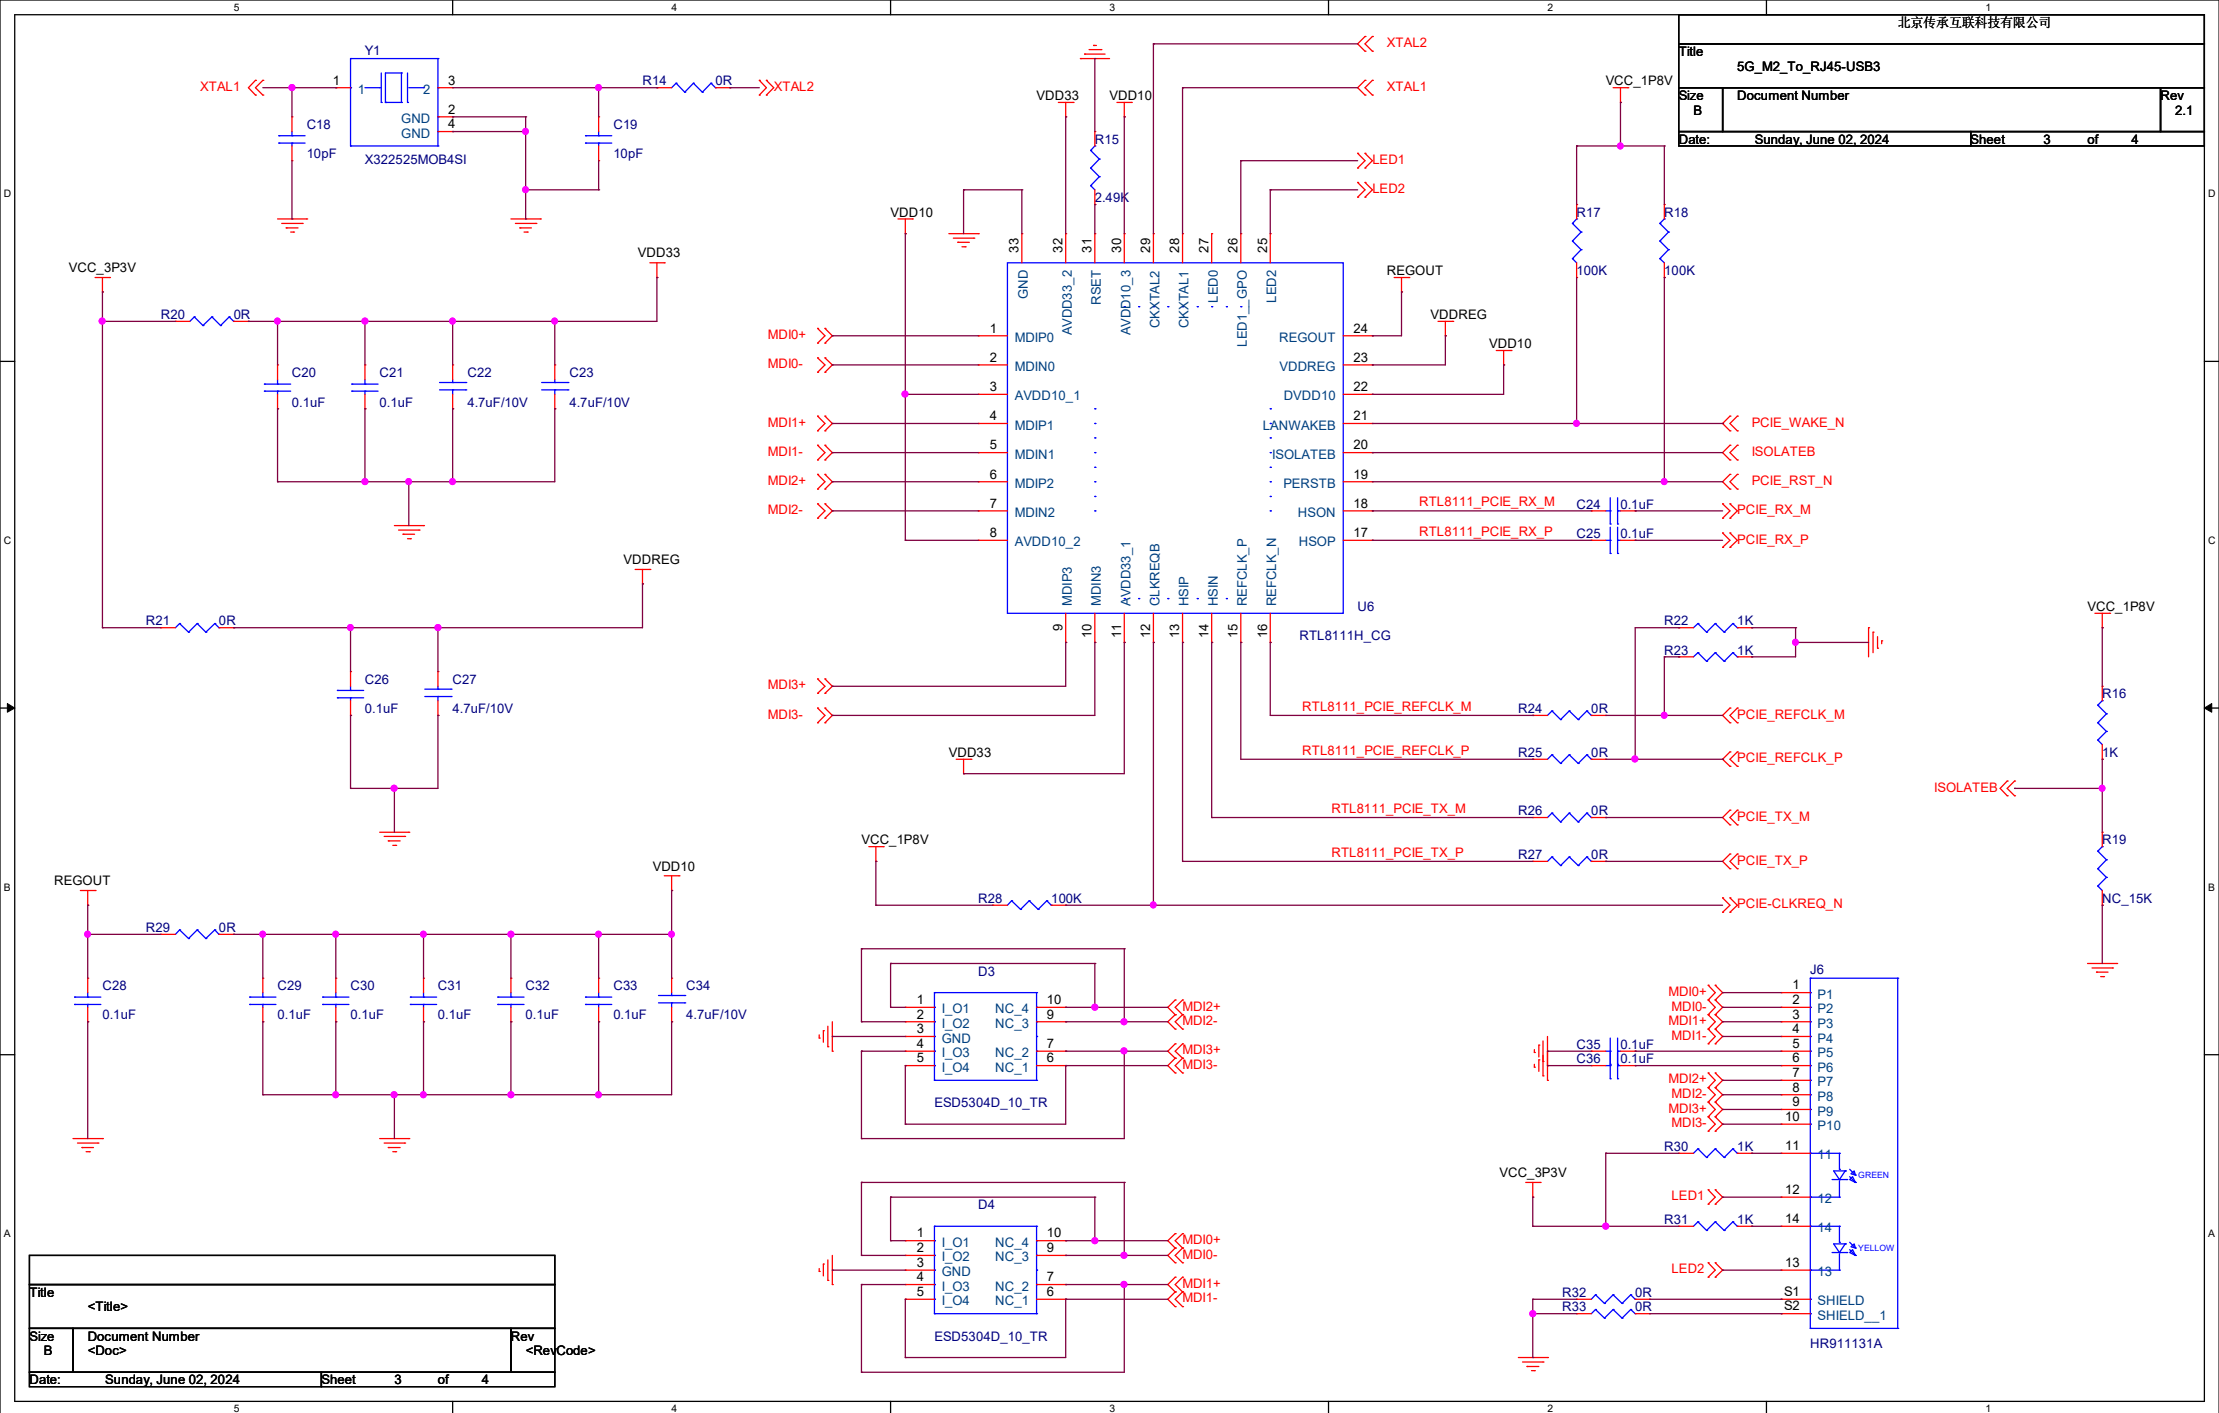

Title				
<Title>				
Size	Document Number			Rev
B	<Doc>			<Rev
Date:	Sunday, June 02, 2024		Sheet	3 of 4

