



Jomo Kenyatta University of Agriculture and Technology
College of Engineering and Technology
School of Mechanical, Materials, and Manufacturing Engineering
Department of Mechatronic Engineering

EMT 2540: PRACTICAL REPORT I

ADDITIVE MANUFACTURING

Bernie Kiplelgo Cheruiyot (ENM221-0054/2017)

Mogire Earl Spencer (ENM221-0077/2017)

June 22, 2022

Contents

Table of Contents	I
List of Figures	II
List of Tables	III
List of Abbreviations	1
1 Introduction	1
1.1 Additive Manufacturing	1
1.2 Objectives	2
2 Literature Review	3
2.1 Additive Manufacturing	3
2.2 Technologies Associated with AM	4
2.2.1 Reverse Engineering Technology	4
2.2.2 Computer Aided Engineering	4
2.2.3 Heptic Based CAD	5
2.3 Classification of AM Processes	5
3 Methodology	7
3.1 Equipment	7
3.2 Procedure	7
4 Results	10
References	11

List of Figures

Figure 3.1.1 Complex Workpiece	8
Figure 3.2.1 Scanning	9
Figure 3.2.2 Scanned 3D model	9

List of Tables

Chapter 1

Introduction

1.1 Additive Manufacturing

Additive Manufacturing (AM) is a manufacturing technology that uses the additive approach in the fabrication of parts. AM significantly simplifies the process of producing complex 3D objects directly from CAD data .

3D Printing has become the most commonly used wording to describe AM technologies. This term alludes to the use of a 2D process (printing) and extending them into the third dimension. Significant improvements in accuracy and material properties have seen 3D printing technology become useful in other applications other than prototyping. These applications are: testing, tooling, manufacturing, etc.

3D printing is a rapid and seamless process. It also reduces the amount of resources and processes required significantly. With the addition of some supporting technologies like silicone-rubber molding, drills, polishers, grinders, etc. AM can be possible to manufacture a vast range of different parts with different characteristics. Workshops which adopt AM technology can be much cleaner, more streamlined, and more versatile than before.

1.2 Objectives

1. To design a CAD model of a complex 3D part.
2. To fabricate the complex 3D part using an Additive Manufacturing technique (3D Printing)

Chapter 2

Literature Review

2.1 Additive Manufacturing

Additive manufacturing, referred to in short as AM, is the basic principle of generating a model using a three-dimensional Computer-Aided Design (3D CAD) system and fabricating it directly without the need for process planning. In contrast to other manufacturing processes, AM needs only some basic dimensional details and a small amount of knowledge on how the AM machine works and the materials that are used to build the part.

The basic working principle for AM works is that parts are made by adding material in layers, each layer being a thin cross-section of the part derived from the original CAD data. Layer thickness will affect the final output: the thinner each layer is, the closer the final part will be to the original.

Additive Manufacturing, commonly referred as 3D printing is a computer-based technology. Like many other manufacturing technologies, improvements in computing power and reduction in mass storage costs paved the way for processing the large amounts of data typical of modern 3D Computer-Aided Design (CAD) models within reasonable time frames. AM takes full advantage of many of the important features of computer technol-

ogy, both directly (in the AM machines themselves) and indirectly (within the supporting technology).

2.2 Technologies Associated with AM

The most common input method for AM technology is to accept a file converted into the STL file format originally built within a conventional 3D CAD system. There are, however, other ways in which the STL files can be generated and other technologies that can be used in conjunction with AM technology. These are:

2.2.1 Reverse Engineering Technology

Reverse Engineering (RE) is the process of capturing geometric data from another object, commonly referred to as 3D scanning. These data is initially available “point cloud” form i.e. an unconnected set of points representing the object surfaces. These points need to be connected together using RE software like Artec, which may also be used to combine point clouds from different scans and to perform other functions like hole-filling and smoothing.

Engineered objects are scanned using laser-scanning or touch probe technology. Objects that have complex internal features or anatomical models may make use of Computerized Tomography (CT).

2.2.2 Computer Aided Engineering

Direct Digital Manufacture, where AM can be used to directly produce final products, requires Computer Aided Engineering (CAE) tools to evaluate how these parts would perform prior to AM. This ensures that we can build products right the first time as a form of Design for Additive Manufacturing (D for AM).

2.2.3 Heptic Based CAD

CAD modeling systems work in a similar way to Freeform modeling systems to provide a design environment that is more intuitive than other standard CAD systems. They often use a robotic haptic feedback device called the Phantom to provide force feedback relating to the virtual modeling environment. An object can be seen on-screen, but also felt in 3D space using the Phantom. The modeling environment includes what is known as Virtual Clay that deforms under force applied using the haptic cursor. This provides a mechanism for direct interaction with the modeling material, much like how a sculptor interacts with actual clay. Basically, this is CAD for non-engineers for non-engineering applications.

2.3 Classification of AM Processes

1. Vat photopolymerization - processes that utilize a liquid photopolymer that is contained in a vat and processed by selectively delivering energy to cure specific regions of a part cross-section.
2. Material extrusion - processes that deposit a material by extruding it through a nozzle, typically while scanning the nozzle in a pattern that produces a part cross-section.
3. Material jetting: ink-jet printing processes.
4. Binder jetting - processes where a binder is printed into a powder bed in order to form part cross-sections.
5. Sheet lamination: processes that deposit a layer of material at a time, where the material is in sheet form.

-
6. Directed energy deposition - processes that simultaneously deposit a material (usually powder or wire) and provide energy to process that material through a single deposition device.
 7. Fused Deposition Modeling (FDM).

FDM uses a heating chamber to liquefy polymer that is fed into the system as a filament. The filament is pushed into the chamber by a tractor wheel arrangement and it is this pushing that generates the extrusion pressure. In this practical exercise, FDM was used to come up with a 3D object.

Chapter 3

Methodology

The equipment needed and procedures undertaken to carry out 3D printing are described in the following sections. The experiment was done at iPIC (Rapid Prototyping lab) in JKUAT.

3.1 Equipment

1. 3D Scanning hardware and software (Artec3D, Artec Spider, Artec Studio.)
2. Workpiece shown in Figure 3.1.1.
3. 3D Printing hardware and software ()

3.2 Procedure

The 3D scanning hardware and software were set up and the workpiece placed on the turntable for scanning. Figure 3.2.1 shows the workpiece being scanned. Several scans



Figure 3.1.1: Complex Workpiece

were performed and the final 3D model was obtained. Figure 3.2.2 shows the 3D model obtained from the scans.



Figure 3.2.1: Workpiece being scanned

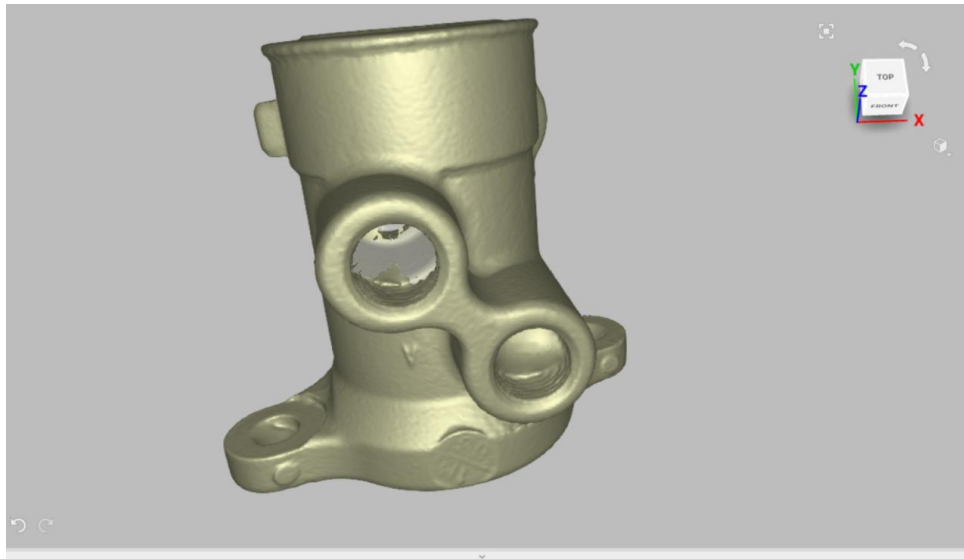


Figure 3.2.2: Model obtained from 3D scanning

Chapter 4

Results

Bibliography

- [1] J. Njiri and D. Söffker, “State-of-the-art in wind turbine control: Trends and challenges,” *Renewable and Sustainable Energy Reviews*, vol. 60, pp. 377–393, 2016.
- [2] T. Kane and D. Levinson, *Dynamics: Theory and Applications*. McGraw-Hill Book Company, New York, 1985.