




 Economic Development Distict,Manshan,Anhui,China

 +86-13335550888
+86-13955563190(wechat/whatsapp)

 www.camcexport.com

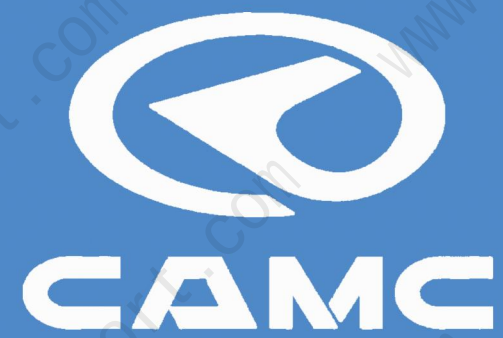

CAMC
PRODUCT BROCHURE

DIESEL/EV/ CNG/LNG/MERHANOL TRUCK

CREATE WEALTH DRIVE FUTURE

- More reliable security
- Green and low-carbon new energy
- Suitable for multiple transportation modes
- More configuration options



COMPANY PROFILE

CAMC is the China production and R&D base for heavy-duty trucks, special-purpose heavy-duty vehicles and parts, and is also a major state-supported enterprise. CAMC is located in Ma'an Shan Economic and Technological Development Zone, Anhui, China. In the 1970s, CAMC began to produce bulk cement trucks. In the 1990s, CAMC developed concrete mixer trucks, leading the Chinese mixer truck market. Entering the 21st century, CAMC entered overseas markets, it has been exported to more than 60 countries or regions, mainly traditional diesel tractors, dump trucks, mixer trucks, cargo trucks and electric trucks. In addition, CAMC is the only truck company in China that can independently produce all products, including engines, gearboxes, axles, chassis, and cabs. Domestic and foreign buyers give it high praise.

DIESEL TRUCK



CAMC 4x2 H7 Tractor Truck

Item	Parameter
Truck series	H7 tractor truck
Cabin	CAMC H7 high roof
Color	Red, white, blue, yellow, others optional but charged
Wheelbase	3400
Drive type	4x2
Overall vehicle size(mm)	5950*2550*3850
Kerb weight(kg)	6870
Total weight(kg)	18000
Engine	CM6D28 420 31
Transmission	12JSD200T
Frame	310(8+5mm)
Front axle	7.5T
Middle and rear axle	16T,speed ratio:3.867
Suspension	9/9+6
Tire	385/65R22.5,315/80R22.5
Fuel tank	400L aluminum alloy fuel tank
Emission Standards	Euro 2
Truck entertainment terminal	/
Stabilizer bar	Optional



CAMC 6x4 H7 Dump Truck

Item	Parameter
Truck series	H7 dump truck
Cabin	CAMC H7 flat roof
Color	Red, white, blue, yellow, others optional but charged
Wheelbase	3900+1350
Drive type	6x4
Overall vehicle size(mm)	8380*2495*3400
Kerb weight(kg)	12500
Total weight(kg)	40000
Engine	CM6D18.420 50
Transmission	12JSDX220T-B
Frame	310(8+8mm)
Front axle	7.5T
Middle and rear axle	16T,speed ratio:5.263
Suspension	11/14
Tire	12.00R20(18PR)
Fuel tank	400L aluminum alloy fuel tank
Emission Standards	Euro 5
Truck entertainment terminal	/
Stabilizer bar	Optional



CAMC 6x4 H7 Concrete Mixer Truck

Item	Parameter
Truck series	H7 concrete mixer truck
Cabin	CAMC H7 flat roof
Color	Red, white, blue, yellow, others optional but charged
Wheelbase	3600+1350
Drive type	6x4
Overall vehicle size(mm)	9000*2550*3920
Kerb weight(kg)	15000
Total weight(kg)	47000
Mixing tank capacity(m3)	8/9/10
Engine	CM6D18.385 31
Transmission	9JSD200T
Frame	310(8+5mm)
Front axle	7.5T
Middle and rear axle	16T,speed ratio:5.263
Suspension	9/12
Tire	12.00R20(16PR)
Fuel tank	400L aluminum alloy fuel tank
Emission Standards	Euro 2
Truck entertainment terminal	/
Stabilizer bar	Optional



CAMC 6x4 H9 Tractor Truck

Item	Parameter
Truck series	H9 Tractor truck
Cabin	CAMC H9 low floor cab
Color	Red, white, blue, yellow, others optional but charged
Wheelbase	3400+1350
Drive type	6x4
Overall vehicle size(mm)	7140*2495*3850
Kerb weight(kg)	8870
Total weight(kg)	50000
Engine	CM6D20.450 50
Transmission	12JSDX220T-B
Frame	310(8+5mm)
Front axle	7T
Middle and rear axle	16T,speed ratio:4.267
Suspension	9/12
Tire	12.00R20(18PR)
Fuel tank	800L aluminum alloy fuel tank
Emission Standards	Euro 5
Truck entertainment terminal	Optional
Stabilizer bar	Optional



CAMC 6x4 H9 Dump Truck

Item	Parameter
Truck series	H9 dump truck
Cabin	CAMC H9 flat roof
Color	Red, white, blue, yellow, others optional but charged
Wheelbase	3900+1350
Drive type	6x4
Overall vehicle size(mm)	8380*2495*3400
Kerb weight(kg)	12500
Total weight(kg)	40000
Engine	CM6D18.420 50
Transmission	12JSDX220T-B
Frame	310(8+8mm)
Front axle	7.5T
Middle and rear axle	16T,speed ratio:5.263
Suspension	11/14
Tire	12.00R20(18PR)
Fuel tank	400L aluminum alloy fuel tank
Emission Standards	Euro 5
Truck entertainment terminal	/
Stabilizer bar	Optional



CAMC 8x4 H9 Dump Truck

Item	Parameter
Truck series	H9 dump truck
Cabin	CAMC H9 flat roof
Color	Red, white, blue, yellow, others optional but charged
Wheelbase	1850+3370+1350
Drive type	8x4
Overall vehicle size(mm)	10080*2495*3400
Kerb weight(kg)	15000
Total weight(kg)	45000
Engine	CM6D18.420 50
Transmission	12JSDX220T-B
Frame	310(8+5mm)
Front axle	7.5T
Middle and rear axle	16T,speed ratio:5.263
Suspension	9/9/12
Tire	12.00R20(18PR)
Fuel tank	400L aluminum alloy fuel tank
Emission Standards	Euro 5
Truck entertainment terminal	/
Stabilizer bar	Optional

DIESEL TRUCK



CAMC 6x4 H9 Concrete Mixer Truck

Item	Parameter
Truck series	H9 concrete mixer truck
Cabin	CAMC H9 flat roof
Color	Red, white, blue, yellow, others optional but charged
Wheelbase	3900+1350
Drive type	6x4
Overall vehicle size(mm)	9300*2500*3920
Kerb weight(kg)	15000
Total weight(kg)	47000
Mixing tank capacity(m³)	8/9/10
Engine	CM6D18.375 50
Transmission	12JSD180T
Frame	310(8+5mm)
Front axle	7.5T
Middle and rear axle	16T,speed ratio:5.263
Suspension	9/12
Tire	12.00R20(16PR)
Fuel tank	400L aluminum alloy fuel tank
Emission Standards	Euro 5
Truck entertainment terminal	/
Stabilizer bar	Optional



CAMC 8x4 H9 Concrete Mixer Truck

Item	Parameter
Truck series	H9 concrete mixer truck
Cabin	CAMC H9 flat roof
Color	Red, white, blue, yellow, others optional but charged
Wheelbase(mm)	1850+3370+1350
Drive type	8x4
Overall vehicle size(mm)	10800*2500*3998
Kerb weight(kg)	18500
Total weight(kg)	47000
Mixing tank capacity(m³)	9/9/12
Engine	CM6D18.420 50
Transmission	12JSD180T
Frame	310(8+5mm)
Front axle	7.5T
Middle and rear axle	16T,speed ratio:5.263
Suspension	9/9/12
Tire	12R22.5(18PR)
Fuel tank	300L aluminum alloy fuel tank
Emission Standards	Euro 5
Truck entertainment terminal	/
Stabilizer bar	Optional

ELECTRIC TRUCK



CAMC M5 Electric Tractor Truck

Item	HN4251B36C6BEV
Driving mode	6X4
Wheelbase (mm)	3600+1350
Curb weight (Kg)	11900
GVW (kg)	50000
Ratio of driving axle	4.875(Optional: 5.263, 4.11, etc.)
Motor type	Permanent magnet synchronous motor
(kw) Motor rated/peak power (kw)	220/360
(Nm) Motor rated/peak torque (Nm)	1500/2100
Gearbox	4 shift, AMT
Power Battery	Lithium iron phosphate(CATL)
Power Battery specs	618.24 V, 281.92 kWh
0~50km/h Acceleration time (s)	25
Maximum speed (km/h)	85
Maximum climbing grade (%)	25
Driving range under standard load combined condition (km)	150~170
Power on mode (charging / battery Swapping)	Battery Swapping/DC charging of dual guns
Charging/battery Swapping time	Charging 1h Battery Swapping<6min



CAMC M7 Electric Tractor Truck

Item	HN4251N36C6BEV
Driving mode	6X4
Wheelbase (mm)	3600+1350
Curb weight (Kg)	11900
GVW (kg)	50000
Ratio of driving axle	4.875(Optional: 5.263, 4.11, etc.)
Motor type	Permanent magnet synchronous motor
(kw) Motor rated/peak power (kw)	220/360
(Nm) Motor rated/peak torque (Nm)	1500/2100
Gearbox	4 shift, AMT
Power Battery	Lithium iron phosphate(CATL)
Power Battery specs	618.24 V, 281.92 kWh
0~50km/h Acceleration time (s)	25
Maximum speed (km/h)	85
Maximum climbing grade (%)	25
Driving range under standard load combined condition (km)	150~170
Power on mode (charging / battery Swapping)	Battery Swapping/DC charging of dual guns
Charging/battery Swapping time	Charging 1h Battery Swapping<6min



CAMC M7 Electric Tractor Truck

Item	HN4251B36C6BEV
Driving mode	6X4
Wheelbase (mm)	3600+1350
Curb weight (Kg)	11900
GVW (kg)	50000
Ratio of driving axle	4.875(Optional: 5.263, 4.11, etc.)
Motor type	Permanent magnet synchronous motor
(kw) Motor rated/peak power (kw)	220/360
(Nm) Motor rated/peak torque (Nm)	1500/2100
Gearbox	4 shift, AMT
Power Battery	Lithium iron phosphate(CATL)
Power Battery specs	579.6 V, 350.08 kWh
0~50km/h Acceleration time (s)	25
Maximum speed (km/h)	85
Maximum climbing grade (%)	25
Driving range under standard load combined condition (km)	190~210
Power on mode (charging / battery Swapping)	Battery Swapping/DC charging of dual guns
Charging/battery Swapping time	Charging 1.5h Battery Swapping<6min



CAMC H7 Electric Tractor Truck

Item	HN4250H36C8BEV
Driving mode	6X4
Wheelbase (mm)	3800+1350
Curb weight (Kg)	11900
GVW (kg)	50000
Ratio of driving axle	5.921 (Optional: 5.263, 4.11, etc.)
Motor type	Permanent magnet synchronous motor
Motor rated / peak power (kW)	220/360
Motor rated / peak torque (N.m)	1500/2100
Gearbox	9 shift, AMT
Power Battery	Lithium iron phosphate(CATL)
Power Battery specs.	618.24 V, 281.92 kWh
0~50km/h Acceleration time (s)	25
Maximum speed (km/h)	85
Maximum climbing grade (%)	25
Driving range under standard load combined condition (km)	150~170
Power on mode (charging / battery Swapping)	Battery Swapping/DC charging of dual guns
Charging/battery Swapping time	Charging 1h Battery Swapping<6min

ELECTRIC TRUCK



CAMC H7 Electric Tractor Truck

Item	HN4250H36C8BEV
Driving mode	6X4
Wheelbase (mm)	3800+1350
Curb weight (Kg)	11900
GVW (kg)	50000
Ratio of driving axle	5.921 (Optional: 5.263, 4.11, etc.)
Motor type	Permanent magnet synchronous motor
Motor rated / peak power (kW)	220/360
Motor rated / peak torque (N.m)	1500/2100
Gearbox	9 shift, AMT
Power Battery	Lithium iron phosphate(CATL)
Power Battery specs.	579.6 V, 350.08 kWh
0~50km/h Acceleration time (s)	25
Maximum speed (km/h)	85
Maximum climbing grade (%)	25
Driving range under standard load combined condition (km)	190~210
Power on mode (charging / battery Swapping)	Battery Swapping/DC charging of dual guns
Charging/battery Swapping time	Charging 1.5h Battery Swapping<6min

ELECTRIC TRUCK



CAMC H9 RHD Tractor Truck

Item	
Driving mode	6X4
Wheelbase (mm)	3800+1350
Curb weight (Kg)	11900
GVW (kg)	50000
Ratio of driving axle	4.875 (Optional: 5.263, 4.11, etc.)
Motor type	Permanent magnet synchronous motor
Motor rated / peak power (kW)	270/1150
Motor rated / peak torque (N.m)	405/2400
Gearbox	4 shift, AMT
Power Battery	Lithium iron phosphate(CATL)
Power Battery specs.	618.24 V, 281.92 kWh
0~50km/h Acceleration time (s)	25
Maximum speed (km/h)	85
Maximum climbing grade (%)	25
Driving range under standard load combined condition (km)	150~170
Power on mode (charging / battery Swapping)	Battery Swapping/DC charging of dual guns
Charging/battery Swapping time	Charging 1h Battery Swapping<6min



CAMC H7 New Electric Tractor Truck

Item	HN4250H22C8BEVY
Driving mode	6X4
Wheelbase (mm)	3800+1350
Curb weight (Kg)	11900
GVW (kg)	50000
Ratio of driving axle	4.875 (Optional: 5.263,4.11, etc.)
Motor type	Permanent magnet synchronous motor
Motor rated / peak power (kW)	2×140/220
Motor rated / peak torque (N.m)	2×330/750
Gearbox	7 shift, AMT
Power Battery	Lithium iron phosphate(CATL)
Power Battery specs.	618.24 V,281.92 kWh
0~50km/h Acceleration time (s)	25
Maximum speed (km/h)	85
Maximum climbing grade (%)	25
Driving range under standard load combined condition (km)	150~170
Power on mode (charging / battery Swapping)	Battery Swapping/DC charging of dual guns
Charging/battery Swapping time	Charging 1h Battery Swapping<6min



CAMC M5 Electric Dump Truck

Item	HN3313B36C2BEVY
Driving mode	8X4
Wheelbase (mm)	1850+3200+1350
Curb weight (Kg)	11900
GVW (kg)	50000
Motor type	Permanent magnet synchronous motor
Battery power	282kwh
Motor rated / peak power (kW)	220/360
Motor rated / peak torque (N.m)	1500/2100
Gearbox	9 shift, AMT
Front axle	7.5T
Driving axle	HL300A(5.921)
Frame	302(8+5mm)
Suspension	9/9/12
Tire	11.00R20(18PR)
Driving range under standard load combined condition (km)	130~150
Power on mode (charging / battery Swapping)	Battery Swapping/DC charging of dual guns
Charging/battery Swapping time	Charging 1h Battery Swapping<6min



CAMC H7 New Electric Tractor Truck

Item	HN4250H22C8BEVY
Driving mode	6X4
Wheelbase (mm)	3800+1350
Curb weight (Kg)	11900
GVW (kg)	50000
Ratio of driving axle	4.875 (Optional: 5.263,4.11, etc.)
Motor type	Permanent magnet synchronous motor
Motor rated / peak power (kW)	2×140/220
Motor rated / peak torque (N.m)	2×330/750
Gearbox	7 shift, AMT
Power Battery	Lithium iron phosphate(CATL)
Power Battery specs.	579.6 V,350.08 kWh
0~50km/h Acceleration time (s)	25
Maximum speed (km/h)	85
Maximum climbing grade (%)	25
Driving range under standard load combined condition (km)	190~210
Power on mode (charging / battery Swapping)	Battery Swapping/DC charging of dual guns
Charging/battery Swapping time	Charging 1.5h Battery Swapping<6min



CAMC M5 Electric Dump Truck

Item	HN3313B36C2BEVY
Driving mode	8X4
Wheelbase (mm)	1850+3200+1350
Curb weight (Kg)	11900
GVW (kg)	50000
Motor type	Permanent magnet synchronous motor
Battery power	350kwh
Motor rated / peak power (kW)	220/360
Motor rated / peak torque (N.m)	1500/2100
Gearbox	9 shift, AMT
Front axle	7.5T
Driving axle	HL300A(5.921)
Frame	302(8+5mm)
Suspension	9/9/12
Tire	11.00R20(18PR)
Driving range under standard load combined condition (km)	160~180
Power on mode (charging / battery Swapping)	Battery Swapping/DC charging of dual guns
Charging/battery Swapping time	Charging 1.5h Battery Swapping<6min

ELECTRIC TRUCK



CAMC M7 Electric Dump Truck

Item	HN3310N22E1BEVJY
Driving mode	8X4
Wheelbase (mm)	1850+3200+1350
Curb weight (Kg)	11900
GVW (kg)	50000
Battery power	282kwh
Motor rated / peak power (kW)	2x140/220
Motor rated / peak torque (N.m)	2x330/750
Gearbox	EK-7DMT-22000A(PTO)
Front axle	7.5T
Driving axle	HL300A(5.921)
Frame	302(8+5mm)
Suspension	9/9/12
Tire	11.00R20(18PR)
Driving range under standard load combined condition (km)	130~150
Braking system	ABS
Low Voltage battery	180Ah
Power on mode (charging / battery Swapping)	Battery Swapping/DC charging of dual guns
Charging/battery Swapping time	Charging 1h Battery Swapping<6min



CAMC M7 Electric Dump Truck

Item	HN3311N22C2BEVJY
Driving mode	8X4
Wheelbase (mm)	1850+3200+1350
Curb weight (Kg)	20100,18500
GVW (kg)	50000
Battery power	350kwh
Motor rated / peak power (kW)	2x140/220
Motor rated / peak torque (N.m)	2x330/750
Gearbox	EK-7DMT-22000A(PTO)
Front axle	6T
Driving axle	HL300A(5.921)
Frame	302(8+5mm)
Suspension	9/9/12
Tire	11.00R20(18PR)
Driving range under standard load combined condition (km)	160~180
Braking system	ABS
Low Voltage battery	180Ah
Power on mode (charging / battery Swapping)	Battery Swapping/DC charging of dual guns
Charging/battery Swapping time	Charging 1.5h Battery Swapping<6min



CAMC M7 Electric Dump Truck

Item	HN3310N22C2BEVJY
Driving mode	8X4
Wheelbase (mm)	1850+3200+1350
Curb weight (Kg)	17900,18250,19600
GVW (kg)	50000
Battery power	423kwh
Motor rated / peak power (kW)	2x140/220
Motor rated / peak torque (N.m)	2x330/750
Gearbox	EK-7DMT-22000A(PTO)
Front axle	6T
Driving axle	HL300(5.73)
Frame	302(8+5mm)
Suspension	9/9/12
Tire	11.00R20(18PR)
Driving range under standard load combined condition (km)	190~220
Braking system	ABS
Low Voltage battery	180Ah
Power on mode (charging / battery Swapping)	DC charging of dual guns
Charging/battery Swapping time	Charging 2h

ELECTRIC TRUCK



CAMC M5 Electric Concrete Mixer Truck

Item	HN5310GJBN36C1BEVY
Driving mode	8X4
Wheelbase (mm)	1850+3500+1350
Curb weight (Kg)	16500
GVW (kg)	50000
Battery power	282kwh
Motor rated / peak power (kW)	220/360
Motor rated / peak torque (N.m)	1500/2100
Gearbox	9 shift, AMT
Front axle	7T*2
Driving axle	HL460(4.875),13T*2
Frame	302(7+5mm)
Suspension	9/9/12
Tire	11.00R20(18PR)
Driving range under standard load combined condition (km)	150~170
Braking system	ABS
Low Voltage battery	180Ah
Power on mode (charging / battery Swapping)	Battery Swapping/DC charging of dual guns
Charging/battery Swapping time	Charging 1h Battery Swapping<6min



CAMC M5 Electric Concrete Mixer Truck

Item	HN5310GJBN36C1BEVY
Driving mode	8X4
Wheelbase (mm)	1850+3500+1350
Curb weight (Kg)	16500
GVW (kg)	50000
Battery power	350kwh
Motor rated / peak power (kW)	220/360
Motor rated / peak torque (N.m)	1500/2100
Gearbox	9 shift, AMT
Front axle	7T*2
Driving axle	HL460(4.875),13T*2
Frame	302(7+5mm)
Suspension	9/9/12
Tire	11.00R20(18PR)
Driving range under standard load combined condition (km)	170~190
Braking system	ABS
Low Voltage battery	180Ah
Power on mode (charging / battery Swapping)	DC charging of dual guns
Charging/battery Swapping time	Charging 1.5h



CAMC M7 Electric Concrete Mixer Truck

Item	HN5310GJBN36C1BEVY
Driving mode	8X4
Wheelbase (mm)	1850+3100+1350
Curb weight (Kg)	16500
GVW (kg)	50000
Battery power	282kwh
Motor rated / peak power (kW)	220/360
Motor rated / peak torque (N.m)	1500/2100
Gearbox	6 shift, AMT
Front axle	6T*2
Driving axle	HL439(4.875),13T*2
Frame	302(7+5mm)
Suspension	9/9/12
Tire	11.00R20(18PR)
Driving range under standard load combined condition (km)	150~170
Braking system	ABS
Low Voltage battery	180Ah
Power on mode (charging / battery Swapping)	Battery Swapping/DC charging of dual guns
Charging/battery Swapping time	Charging 1h Battery Swapping<6min

ELECTRIC TRUCK



CAMC M7 Electric Concrete Mixer Truck

Item	HN5310GJBN36C1BEVY
Driving mode	8X4
Wheelbase (mm)	1850+3500+1350
Curb weight (Kg)	16500
GVW (kg)	50000
Battery power	350kwh
Motor rated / peak power (kW)	2x140/220
Motor rated / peak torque (N.m)	2x330/750
Gearbox	EK-7DMT-22000A(PTO)
Front axle	6T*2
Driving axle	HL300(5.73),13T*2
Frame	302(8+4+6mm)
Suspension	5/5/5
Tire	12R22.5(18PR)
Driving range under standard load combined condition (km)	170~190
Braking system	ABS
Low Voltage battery	180Ah
Power on mode (charging / battery Swapping)	Battery Swapping/DC charging of dual guns
Charging/battery Swapping time	Charging 1.5h Battery Swapping <6min



CAMC H9 RHD Electric Concrete Mixer Truck

Item	
Driving mode	6X4
Wheelbase (mm)	3400+1350
Curb weight (Kg)	11960
GVW (kg)	27000
Battery power	282kwh
Motor rated / peak power (kW)	180/300
Motor rated / peak torque (N.m)	850/1950
Gearbox	4 shift, AMT
Front axle	7T*2
Driving axle	HL400 (4.625) ,13T*2
Frame	310(7+5mm)
Suspension	3/5
Tire	11.00R22.5(18PR)
Power Battery	Lithium iron phosphate(CATL)
Braking system	ABS
Low Voltage battery	180Ah
Power on mode (charging / battery Swapping)	DC charging of dual guns
Charging/battery Swapping time	Charging 1h



CAMC Electric Terminal Truck

Item	HN4180D25DLBVJ
Driving mode	4X2
Wheelbase (mm)	4000
Curb weight (Kg)	9500
GVW (kg)	42000(Overload:75T)
Ratio of driving axle	4.875(Optional: 5.263, 4.11, etc.)
Motor type	Permanent magnet synchronous motor
Motor rated / peak power (kW)	220/360
Motor rated / peak torque (N.m)	1500/2100
Gearbox	4 shift, AMT
Power Battery	Lithium iron phosphate(CATL)
Battery power	186kwh
Power Battery specs.	618.24 V, 186.7 kWh
0~50km/h Acceleration time (s)	25
Maximum speed (km/h)	85
Maximum climbing grade (%)	20
Driving range under standard load combined condition (km)	80~100
Power on mode (charging / battery Swapping)	Battery Swapping/DC charging of dual guns
Charging/battery Swapping time	Charging 0.6h Battery Swapping <6min


Spare Part



Oil Filter



LED Light

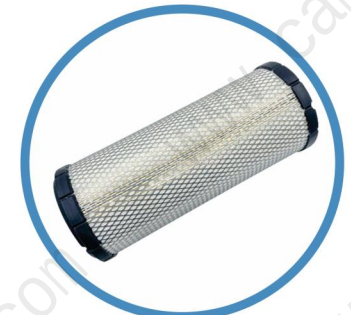

Air Filter



Middle Axle Main/Driven Bevel Gear



Axle



Wiper Motor



Engine



Air Compressor



Tire



Adjustment Arm



U-shaped Bolt



Hand Brake Valve