INSTITUTO TECNONÓLOGICO Y DE ESTUDIOS SUPERIORES DE MONTERREY

MASTERS THESIS PROPOSAL

Graphitic carbon suspended nano-wires synthesis through mechanoelectrospinning of photocrosslinkable polymers

Author:
Antonio Osamu KATAGIRI Tanaka

Principal Advisor:
Dr. Héctor Alán AGUIRRE Soto

Co-advisor and Director of Program:
Dra. Dora Iliana MEDINA Medina

A thesis proposal submitted in fulfillment of the requirements for the degree of Master of Science in Nanotechnology (MNT)

in

ITESM Campus Estado de México
School of Engineering and Sciences

Estado de México, Atizapan de Zaragoza, March 20, 2019

INSTITUTO TECNONÓLOGICO Y DE ESTUDIOS SUPERIORES DE MONTERREY

Campus Estado de México

Supervising Committee

The committee members, hereby, recommend that the proposal by Antonio Osamu KATAGIRI Tanakato be accepted to develop the thesis project as a partial requirement for the degree of Master of Science in Nanotechnology (MNT).

Dr. Héctor Alán AGUIRRE Soto
Tecnológico de Monterrey
Principal Advisor

Marc MADOU
Tecnológico de Monterrey
Committee Member

Sergio Omar MARTÍNEZ Chapa
Tecnológico de Monterrey
Committee Member

Dra. Dora Iliana MEDINA Medina
Director of Program in Nanotechnology
School of Engineering and Sciences

Estado de México, Atizapan de Zaragoza, March 20, 2019

Contents

Supervising Committee iii

Abstract vii

1 Introduction 1

2 Problem Definition and Motivation 3

3 Hypothesis and Research Questions 5
3.1 Research Hypothesis 5
3.2 Research Questions 5

4 Objectives 7
4.1 General objective 7
4.2 Particular objectives 7

5 Theoretical Framework 9
5.1 Electro-Mechanical Spinning 9
5.2 Carbon nano-fibers 9

6 Methodology 11

7 Work Plan 13

INSTITUTO TECNONÓLOGICO Y DE ESTUDIOS SUPERIORES DE MONTERREY

Abstract

Faculty: Nanotechnology

School of Engineering and Sciences

Master of Science in Nanotechnology (MNT)

Graphitic carbon suspended nano-wires synthesis through mechanoelectrospinning of photocrosslinkable polymers

by Antonio Osamu KATAGIRI Tanaka

Carbon nano-wires are versatile materials composed of carbon chains with a wide range of applications due to their matchless properties in electrical matters. Regardless of the high interest in the implementation of carbon nano-wires in several applications and devices, no feasible processes have been developed to synthesize carbon nano-wires. Carbon nano-wires have been fabricated with the use of a photoresist, but little is known about polymers that can produce more conductive carbon nano-wires after pyrolysis. Various polymer solutions have being tested and measured through near field electrospinning (NFES) and photopolymerization processes; it was found that it is not possible to predict the behaviour of the electrospinning process, so additional properties are to be considered to achieve a stable manufacturing process. The thesis proposal is to analyse the rheology of different polymer solutions to determine if they can be easily electrospun at low voltages and then fabricate nanowires with them. The research process will include the design of polymer solutions that can be electrospun, photopolymerized, and then pyrolyzed into conducting carbon nanowires. The research is intended to engineer a newly designed polymer solution to achieve mass scale manufacturing of carbon nano-wires in a cheap, continuous, simple and reproducible manner.

keywords: nanotechnology, carbon, nano-wires, electrospinning, NFES

1 Introduction

[Chapter ready for review]

Carbon nano-materials are subjected to great interest for research purposes due to their various potential applications in diverse areas that take advantage of the nano-scale properties. [8] Carbon nano-materials are suitable for the catalysis, adsorption, carbon capture, energy and hydrogen storage, drug delivery, bio-sensing and cancer detection. [8] Due to some of matchless properties that allow carbon nano-materials to be utilized within multiple functionalities including high porosity, distinguished structures, uniform morphologies, high stability, high magnetic properties and high conductivity. [8]

This document bestow a thesis proposal to perform a research to engineer and design a polymer solution to achieve mass scale manufacturing of carbon nano-wires in a cheap, continuous, simple and reproducible manner. The research intends to involve several manufacturing processes such as near field electrospinning, photopolymerization, pyrolization and carbonization, as they have shown to be promising methods for synthesis of carbon nano-materials. [2] A number of processes have been developed for specific purposes of polymeric nano-fibers, some include surface deposition, composites, and chemical adjustments. Polymeric nano-fibers ~~could~~ be also pyrolyzed to generate carbon nano-wires with conductive capabilities [5] for electrochemical sensing and energy storage purposes.

Nanotechnology has explored different polymer patterning techniques to integrate carbon nano-wires structures. One technique is known as far-field electrospinning, a process in which electrified jets of polymer solution are jettisoned to synthesize nano-fibers which then are pyrolyzed at high temperatures. One sub-technique derived from electrospinning is near field electromechanical spinning or EMS. EMS has proved to deliver high control in patterning polymeric nano-fibers. [2]

The proposal is to continue the previous work done in regards of the synthesis of carbon nano-wires. Previous work includes the fabrication of suspended carbon nano-wires by two methods: electro-mechanical spinning and multiple-photon polymerization with a photoresist. [2] This ~~proposal research~~ is intended to focus on electro-mechanical spinning processes only, to bring off polymer solutions that can be electrospun by ~~nier~~ field electrospinning (NFES), photopolymerized and pyrolyzed into conducting carbon nano-wires. The polymer solutions described in [2] are to be amended to achieve the goal mentioned in the previous statement.

Near-field electrospinning or NFES allows large scale manufacturability combined with controlled guidance. [5] However, the reported efforts required the use of electric fields in excess of 200 kV/m for continuous operation so that the resulting in limited control for nano-fiber patterning. [5] the current state-of-the-art synthesis processes for polymer nano-fibers lack to yield precise, inexpensive, fast, and continuous manufacturing properties.

2 Problem Definition and Motivation

[Chapter ready for review]

Carbon nanowires have been fabricated with a photoresist by multiple-photon polymerization techniques. However little is known about polymers that can produce conductive carbon nano-wires after pyrolysis. In the past years photon polymerization processes have been applied to the fabrication of nano-structures with the use of a photoresist. [1] Photon polymerization techniques deliver patterning resolutions with nano-scale tolerances for the production of highly detailed structures, [4] However, it is typical of photon polymerization processes to yield small objects with waste resins that are often toxic. [7]

On the other hand, electrospinning has been acknowledged ~~for~~ as a process with promising results at nano-structure fabrication [1], yet there is little research regarding the implementation of electrospinning for the fabrication of carbon nano-wires. Electrospinning has the potential to be a more straightforward process for the design and fabrication of nano-structures, as it can achieve mass scale manufacturing in a continuous, simple and reproducible manner. [2] shows that electrospinning can be implemented with ease for carbon nano-wire synthesis. Mechano-electrospinning, a new variant of electrospinning shows promising results in the production of ordered carbon nano-wires. As stated in [2], mechano-electrispinning is an early technology invention, and brings new challenges, such as the reproducibility of carbon nano-wire production.

Since electrospinning seems to be a better alternative for carbon nano-wire ~~synthesis~~ processes; and for that purpose of its implementation, it is required

to develop polymer solutions that can be mechano-electrospun, photopolymerized and pyrolyzed into conducting carbon nano-wires. Carbon nano-materials have been subjected to research due to their various potential applications in diverse areas that take advantage of the nano-scale properties. [8] Carbon nano-materials are suitable for the catalysis, adsorption, carbon capture, energy and hydrogen storage, drug delivery, bio-sensing and cancer detection. [8] However most application are not currently feasible due to the lack of a continuous, simple and reproducible fabrication method. With the newly designed polymer solution, it would be possible to produce carbon nano-wires in large quantities, and therefore more applications will become feasible.

3 Hypothesis and Research Questions

[Chapter ready for review]

3.1 Research Hypothesis

The rheological properties of polymer solutions along with synthesis parameters (stage velocity, voltage, dispense rate) can be amended to obtain a low voltage electrospun-able, photopolymerizable and graphitizable fibers for the synthesis of carbon nano-wires with specified dimensions (diameter and length).

3.2 Research Questions

- ~~Are~~ there any evidence of carbon nano-wire fabrication though electrospun-able and pyrozable polymer solutions?
- What are the process parameters to consider/control for the fabrication processes of carbon nano-wires?
- What rheological properties are to be controlled/tested to deliver a electrospun-able and pyrozable polymer solution?
- Are there any efforts employed to the design of polymer solutions that can be electrospun, photopolymerized, and pyrolyzed into conducting carbon nanowires?
- Are ~~the~~ fabrication parameters defined ~~in~~ [2] ~~optimal~~ for the synthesis of carbon nano-wires through near-field electromechanical spinning?

4 Objectives

[Chapter ready for review]

4.1 General objective

~~Exercise~~ the practice and feasibility of a new synthesis process to achieve mass scale manufacturing of carbon nano-wires in an inexpensive, continuous, simple and reproducible manner.

4.2 Particular objectives

- Design polymer solutions that can be electrospun by NFES, photopolymerized, and then pyrolyzed.
- Through rheological analyses, determine if polymer solutions can be easily employed for conducting carbon nano-wire synthesis.
- Determine and control the polymer solution rheological properties along with the process parameters of carbon nano-wire synthesis.

5 Theoretical Framework

[Chapter under work]

5.1 Electro-Mechanical Spinning

Diverse polymer patterning techniques have been developed to integrate and synthesize carbon nano-wires. A typical technique is electrospinning. Electrospinning requires the application of an electrostatic force to a polymer solution to spin fibers. The applied electric field, the solution conductivity, jet length, solution viscosity surrounding gas, flow rate and the collector geometry are important parameters that influence the fiber formation during the spinning. [6] Two sub-techniques can be derived from electrospinning depending on the distance between the dispensing electrode and the collector. The process in which the electrospun jet can be controlled near the tip is called NFES or near-field electrospinning. [3] Moreover, if the distance between the collector and the dispensing needle is farther, the configuration is known as FFES or far-field electrospinning. [6]

5.2 Carbon nano-fibers

Carbon nano-wires (CMWs) are known as long, thin strings with diameters between 10 and 1 thousand nm; composed mostly by carbon atoms aligned parallel to the long axis of the fiber. [6] Carbon nano-wires are different from carbon ~~tubes~~, as CMWs are not composed by graphene sheets in cylindrical form. [6]

6 Methodology

[Chapter under work]

7 Work Plan

[Chapter under work]

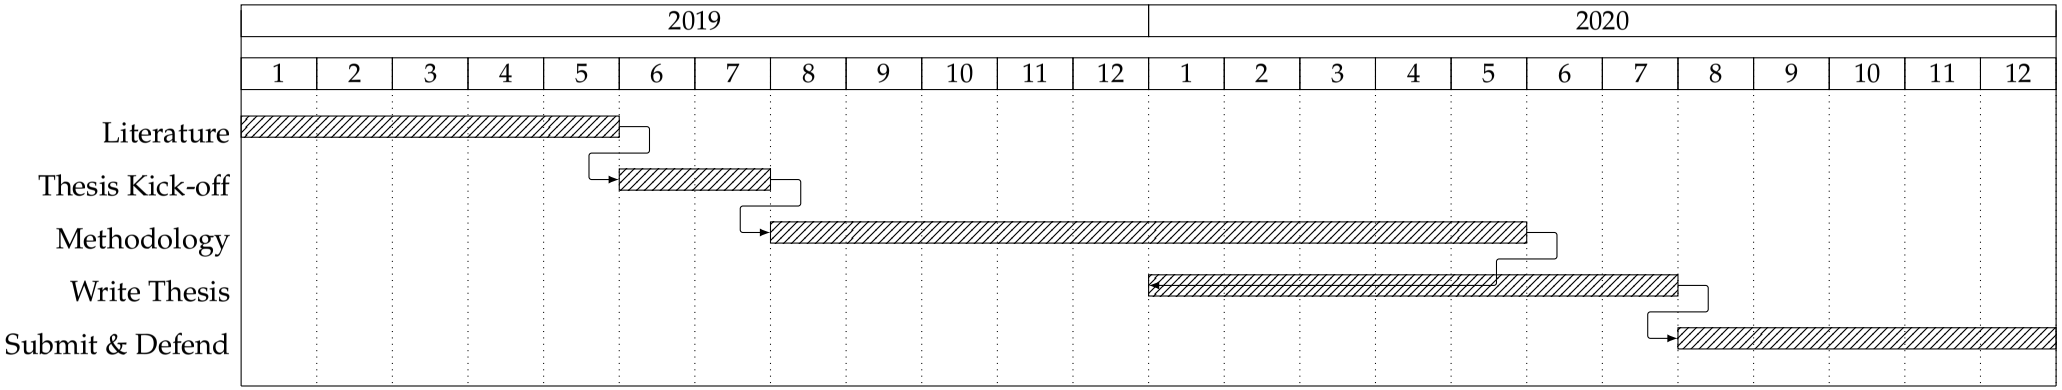

References

[1] Jan Boer and Clemens Blitterswijk. *Tissue Engineering*. Ed. by Academic Press of Elsevier AP. 2nd. Safary O Reilly, 2014. URL: https://learning.oreilly.com/library/view/tissue-engineering-2nd/9780124201453/XHTML/B9780124201453000109/B9780124201453000109.xhtml.

[2] Braulio Cárdenas. "Advanced Manufacturing Techniques for the Fabrication and Surface Modification of Carbon Nanowires". In: (2017), p. 160.

[3] Albert Cisquella-Serra et al. "Study of the electrostatic jet initiation in near-field electrospinning". In: *Journal of Colloid and Interface Science* 543 (May 2019), pp. 106–113. ISSN: 0021-9797. DOI: 10.1016/J.JCIS.2019.02.041. URL: https://0-www-sciencedirect-com.millenium.itesm.mx/science/article/pii/S0021979719302152.

[4] Kolin C Hribar et al. "Light-assisted direct-write of 3D functional biomaterials." In: *Lab on a chip* 14.2 (Jan. 2014), pp. 268–75. ISSN: 1473-0189. DOI: 10.1039/c3lc50634g. URL: http://www.ncbi.nlm.nih.gov/pubmed/24257507.

[5] Marc J. Madou et al. "Controlled Continuous Patterning of Polymeric Nanofibers on Three-Dimensional Substrates Using Low-Voltage Near-Field Electrospinning". In: *Nano Letters* 11.4 (2011), pp. 1831–1837. ISSN: 1530-6984. DOI: 10.1021/nl2006164.

[6] S.K. Nataraj, K.S. Yang, and T.M. Aminabhavi. "Polyacrylonitrile-based nanofibers—A state-of-the-art review". In: *Progress in Polymer Science* 37.3 (Mar. 2012), pp. 487–513. ISSN: 0079-6700. DOI: 10.1016/J.PROGPOLYMSCI.2011.07.001. URL: https://0-www-sciencedirect-com.millenium.itesm.mx/science/article/pii/S0079670011000931.

[7] Aleksandr Ovsianikov et al. "Engineering 3D cell-culture matrices: Multiphoton processing technologies for biological and tissue engineering applications". In: *Expert review of medical devices* 9 (Sept. 2012). DOI: 10.1586/erd.12.48.

[8] M.T.H Siddiqui et al. "Fabrication of advance magnetic carbon nano-materials and their potential applications: A review". In: *Journal of Environmental Chemical Engineering* 7.1 (Feb. 2019), p. 102812. ISSN: 2213-3437. DOI: 10.1016/J.JECE.2018.102812. URL: https://0-www-sciencedirect-com.millenium.itesm.mx/science/article/pii/S2213343718307358.