


A Estimated plan rate across control points

Nominale Einstellung: 800 MU/min
Geschätzter Planverlauf · keine gemessene Abgabe

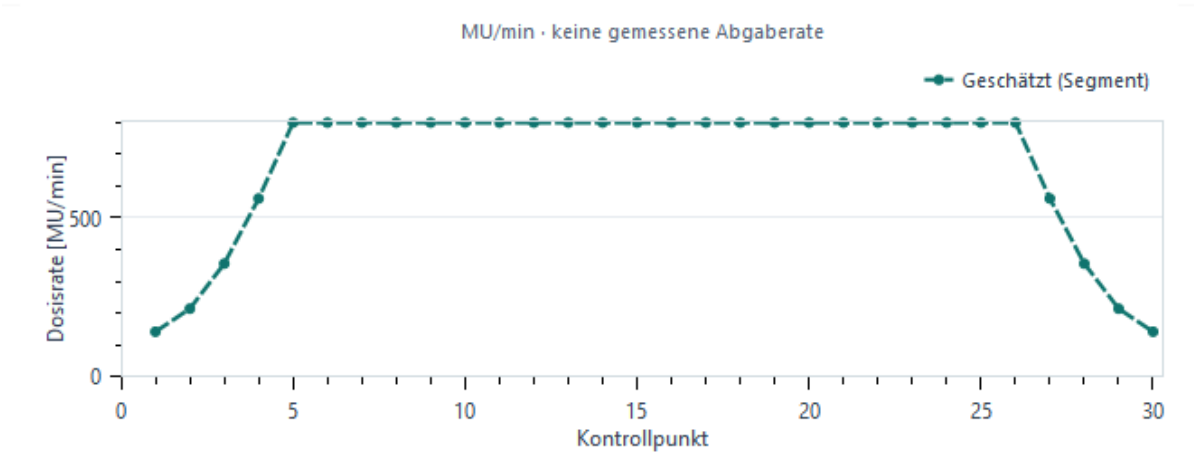

Profil: SYNTHETIC_DUAL_LAYER_RATE · Gantry-Annahme 12 °/s

B Field-start BEV with two jawless MLC layers

Beam's-eye view

Isocentre plane · BLD coordinates · cm

Layer 1 · 20 pairs
Leaf widths at ISO: 10 mm

Layer 2 · 21 pairs
Leaf widths at ISO: 10 mm

Jawless · no physical jaws
CT proxy, not diagnostic. Leaf bodies extend to viewport edge.

SYNTHETIC_AR01

Field start · CP 0 · Field 1

SYNTHETIC DUAL LAYER

Synthetic staggered dual-layer

Energy	6 MV FFF (synthetic)
Technique	VMAT
Beam meterset	450.0 MU
Aperture	Jawless · 2 MLC layers

Angles

Gantry	180.0° / 180.0°
Collimator	15.0° / 15.0°
Couch	0.0° / 0.0°

Rate, planned	Unavailable
Rate, nominal	800 MU/min
Open area	78.62 cm ²

Complete MLC / boundary geometry

Orientation schematic

Front room view 90°
0° above; +90° right. Not a collision check.

Couch · top view