

Verification and Validation Report: Image Feature Correspondences for Camera Calibration

Kiran Singh

April 16, 2025

1 Revision History

Date	Version	Notes
2025-04-15	Rev 1.0	Initial Release

2 Symbols, Abbreviations and Acronyms

symbol	description
CSV	comma separated value
FAST	Features from Accelerated Segment Test
IFCS	Image Feature Correspondences for Camera Calibration software
T	Test

Contents

1	Revision History	i
2	Symbols, Abbreviations and Acronyms	ii
3	Functional Requirements Evaluation	1
3.1	Feature Detection	1
3.2	Feature Comparison	4
4	Nonfunctional Requirements Evaluation	6
4.1	Reliability	6
4.2	Usability	6
4.3	Maintainability	7
4.4	Performance	7
5	Comparison to Existing Implementation	8
6	Unit Testing	8
7	Changes Due to Testing	8
8	Automated Testing	12
9	Trace to Requirements	12
10	Trace to Modules	12
11	Code Coverage Metrics	13

List of Tables

1	Traceability matrix between modules and identified unit tests	13
2	Traceability matrix mapping unit tests to associated software modules(M2–M11).	14

List of Figures

1	Outputs of the image smoothing procedure on an untransformed ArUco marker	2
2	Greyscale and noise-reduced images generated from the building dataset	3
3	Generated images of the keypoint detection test with mapped keypoints	4
4	Generated images of the keypoint detection test with mapped keypoints	5
5	Optimal candidate matches between ArUco_000 and ArUco_001	6
6	Outline of automated unit tests	9
7	Unit Test Summary.txt	10
8	Generated Unit Test Reports	11
9	Specification Parameters Unit Test Report	11

This document outlines the results of the system and unit tests for the Image Feature Correspondences for Camera Calibration software. The details of the associated tests are outlined in the [VnV Plan](#).

3 Functional Requirements Evaluation

3.1 Feature Detection

Image Smoother

1. STFR-IS-01

This test evaluates the capacity of the system to import generated ArUco marker imagery, convert the imagery to a greyscale format, perform Gaussian smoothing, and save both the greyscale and smoothed images using a kernel size of 5 and a standard deviation of 1.0. This test was manually initiated and executed via Pytest using the [test_STFR-IS-01.py](#) program. The test passed all checks and provides a [summary.txt](#) of the results under its timestamped [STFR-IS-01](#) output folder.

Requirements Addressed:

- R1 (Update Image Noise)
- R5 (Default Noise Suppression)
- R9 (Perform Noise Reduction)

Figure 1 shows an example of the generated greyscale and smoothed imagery of the ArUco markers. All generated output imagery can be reviewed in the [STFR-IS-01](#) output folder.

As the results from processing a binary ArUco marker do not produce a distinct change in colour to the human eye, a second test was executed on the test imagery provided in the [testImages\building](#) folder.

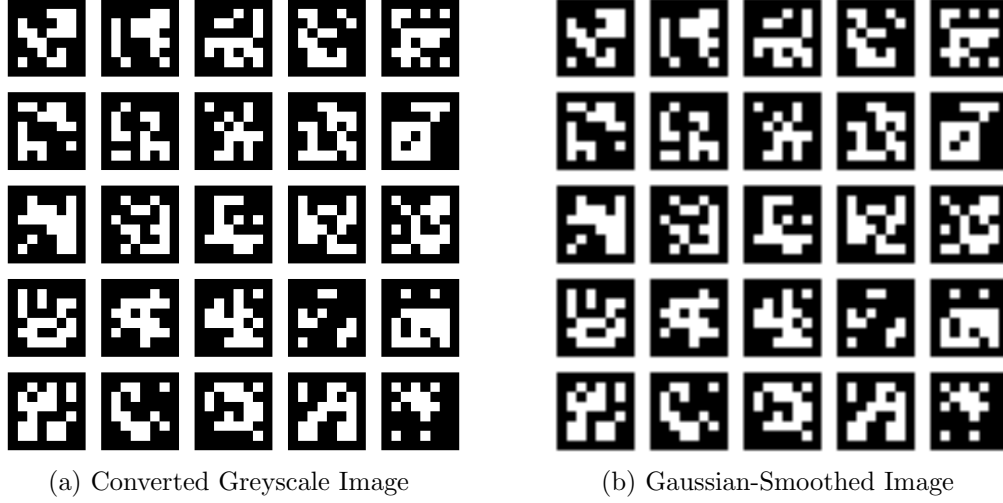


Figure 1: Outputs of the image smoothing procedure on an untransformed ArUco marker

Keypoint Detection

1. STFR-KP-01

This test evaluates the capacity of the system to import smoothed ArUco marker imagery and identify keypoints through use of rotated-FAST methods. A pixel intensity threshold of 60 was set for this test. This test was manually initiated and executed via Pytest using the [test_STFR-KP-01.py](#) program. The test successfully passed all checks and provides a [summary.txt](#) of the results under its timestamped [STFR-KP-01](#) output folder.

Requirements Addressed:

- R2 (Update Pixel Intensity Threshold)
- R6 (Perform Corner Detection)
- R10 (Identify Keypoints)

Figure 3 shows an example of the generated greyscale and smoothed imagery of the ArUco markers. All generated output imagery and corresponding CSV files can be reviewed in the [STFR-KP-01](#) output folder.



(a) Building - RGB Input Image



(b) Building - Greyscale Image



(c) Building - Smoothed Image

Figure 2: Greyscale and noise-reduced images generated from the building dataset


Feature Description

1. STFR-FD-01


This test evaluates the capacity of the system to create oriented-BRIEF descriptors using identified keypoints from smoothed greyscale imagery. A target of 100 was set with a search patch size of 31. This test was manually initiated and executed via Pytest using the [test_STFR-FD-01.py](#) program. The test successfully passed all checks and provides a [summary.txt](#) of the results under its timestamped [STFR-FD-01](#) output folder.

Requirements Addressed:

- R3 (Update Patch Size)

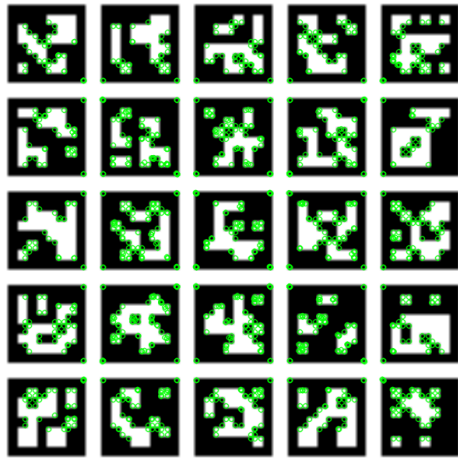

(a) ArUco_000 with keypoints

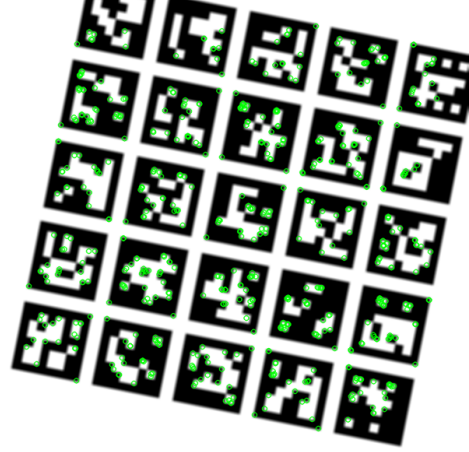

(b) ArUco_001 with keypoints

Figure 3: Generated images of the keypoint detection test with mapped keypoints

- R4 (Update Descriptor Bin Size)
- R7 (Binary Descriptors)
- R11 (Define Descriptors)

Figure 4 shows an example of two ArUco markers with keypoints scaled per their feature descriptors. All generated output imagery and corresponding CSV files can be reviewed in the [STFR-FD-01](#) output folder.

3.2 Feature Comparison

Descriptor Comparison

1. STFR-FM-01

This test evaluates the capacity of the system to compare two sets of predefined feature descriptor between two similar images. Using brute-force matching, a maximum Hamming distance of 25 was set for displayed images. Additionally, a maximum of 30 match candidates were permitted to be displayed in the generated imagery. This test was

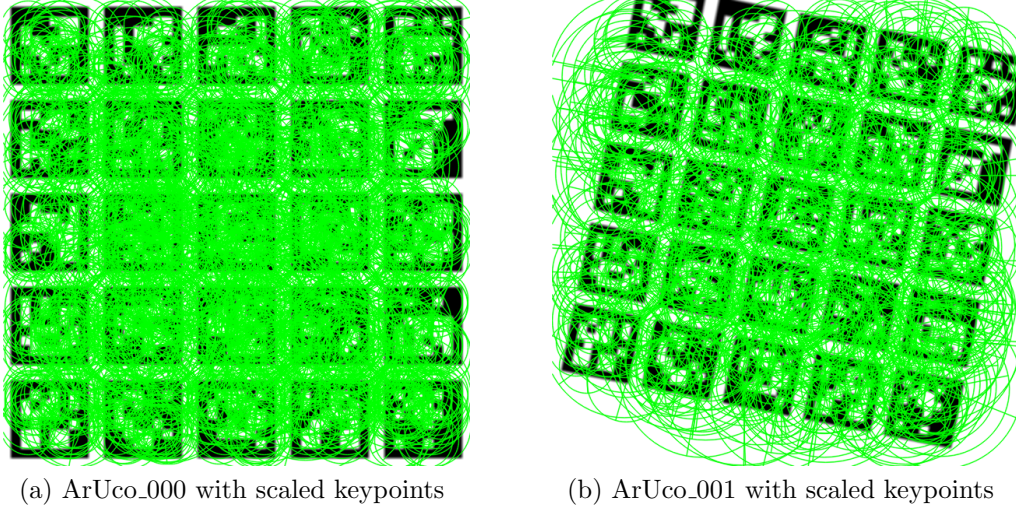


Figure 4: Generated images of the keypoint detection test with mapped keypoints

manually initiated and executed via Pytest using the [test_STFR-FM-01.py](#) program. The test successfully passed all checks and provides a [summary.txt](#) of the results under its timestamped [STFR-FM-01](#) output folder.

Requirements Addressed:

- R8 (Descriptor Comparison - Hamming Distance)
- R12 (Search for Matches Candidates)
- R13 (Verify Match Candidates)
- R14 (Confirm Pose Identifiers)
- R15 (Report Match Candidates)

Figure 5 shows an example of thirty candidate feature matches between markers ArUco_000 and ArUco_001. All generated output imagery and corresponding CSV files can be reviewed in the [STFR-FM-01](#) output folder.

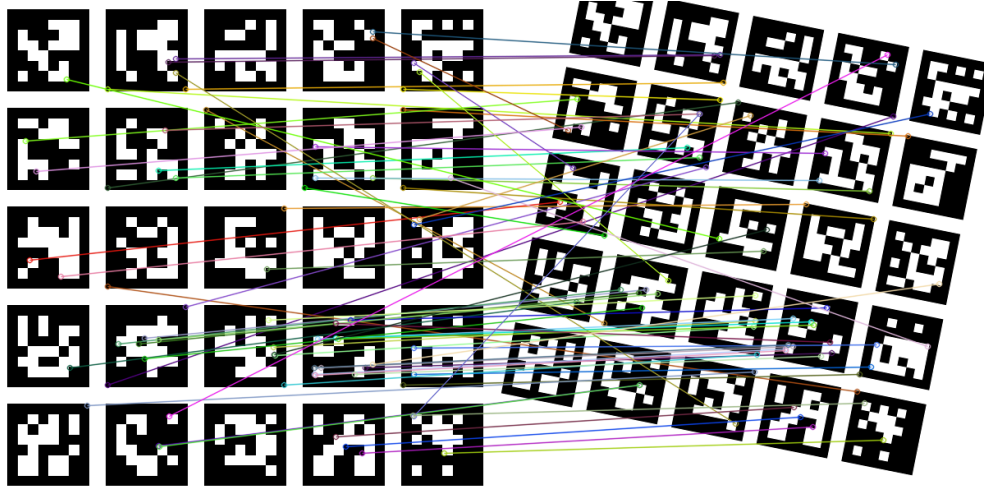


Figure 5: Optimal candidate matches between ArUco_000 and ArUco_001

4 Nonfunctional Requirements Evaluation

4.1 Reliability

- NFR1 (Invariance to the Order of Images)

A test script named [test_STNFR-RE-01.py](#) was prepared. In this script, two images from the [Lego](#) image set are renamed and reordered, as outlined in the [Lego_Swap](#) folder. Both of these datasets are processed to identify candidate matches. The resulting match candidates are compared between each data set to confirm that each descriptor and corresponding coordinates from the Lego dataset is matched to the equivalent descriptor in the transformed Lego_Swap dataset. This test passed with zero errors, and the results are summarized in the [STNFR-RE-01](#).

4.2 Usability

IFCS_DEMO-01

- NFR2 (Simple to Use)

Ten (10) individuals were given a demonstration of the IFCS software, which included a detailed walkthrough of the download process, installation pro-

cesses, and setup of the virtual environment. Audience members were shown how to add new images from the provided library to the inputs folder, adjust the methods and parameters of image processing, and initiate the IFCS pipeline. Once completed, audience members were shown the following outputs.

- generated greyscale imagery
- generated smoothed imagery
- generated imagery with keypoints
- generated imagery with descriptors
- generated imagery that compare images with candidate descriptor matches
- CSV files of keypoints, descriptors and candidate matches

Following the demonstration, a show-of-hands identified that seven (7) of ten audience members stated that they have a favourable opinion of the software and its simplicity of use. At a success rate of 70%, this fall below the target rate of 80%. However, this may be improved with the implementation of any one of a user manual, user walkthrough video, or a one-on-one training session with one of the IFCS developers.

4.3 Maintainability

Requirements Addressed:

- NFR3 (Allocation of Developer Resources for New Features)

Per the [VnV Plan](#), this requirement has been identified as out of scope for the Rev 1.0 release.

4.4 Performance

Requirements Addressed:

- NFR4 (Timing Metrics)
- NFR5 (Memory Usage Metrics)

Timing metrics and memory usage were identified as test features of interest for the lifespan of the IFCS software. These tools would be appended to compare the relative performance of different methods such as FAST and Harris scores for keypoint detection. However, as the scope of the Winter 2025 development cycle narrowed to prioritize robust performance of ORB feature detection and brute-force matching, the implementation of timing metrics will be deferred to the development cycle of Summer 2025. These metric will be assessed as part of the systems tests as follows through the [Pytest Monitor](#) plugin, which has the capacity to assess both timing and memory metrics and is suitable for integration with GitHub Actions.

5 Comparison to Existing Implementation

This section is **not applicable**.

6 Unit Testing

All unit tests are automated to run via a pull request and Pytest Github Actions. These tests can be found in the [test](#). Each test is initiated by the [run_unit_checks.py](#) program, as shown in Figure 6. Upon completion of the unit tests a [summary](#) file is generated that outlines the quantity of tests that have passed or failed for each module, as shown in Figure 7. In the same folder, a detailed summary of all unit tests for each module is outlined, as shown in Figure 8. A detailed example of the unit test report for the **Specification Parameters Module (M4)** is outlined in Figure 9. All unit tests were shown to have passed successfully for each module.

7 Changes Due to Testing

This section summarizes the most significant changes made to the modules and test infrastructure as a result of iterative testing, user feedback, and supervisor reviews, particularly following the Rev 0 demonstration. Each change was implemented to improve traceability, robustness, or test validation.

1. Unification of Output Directory Structure

```

14     # List of test files to run
15  ✓ test_files = [
16     "test_specParams.py",
17     "test_config.py",
18     "test_imagesmooth.py",
19     "test_kpdetect.py",
20     "test_featdesc.py",
21     "test_featmatches.py",
22     "test_imagePlot.py",
23     "test_outputFormat.py",
24     "test_verifyOutput.py",
25     "test_main.py",
26 ]

```

Figure 6: Outline of automated unit tests

All outputs from functional tests (grayscale, smoothed images, key-points, descriptors, and matches) are now saved under a single, timestamped path: `tests/Outputs/<timestamp>/`. This change was made in response to confusion around inconsistent file locations during test runs. It ensures better organization, test reproducibility, and avoids polluting production outputs.

2. Validation of CSV Content and Structure

Functional tests now verify not only the existence of output files but also the correctness of their internal structure, including column names and row counts. For example, descriptor CSVs must contain binary string columns, and match files must include both descriptors and matching scores. This change prevents false positives where tests previously passed despite incomplete or invalid outputs.

3. Enforcement of Parameter Bounds

Dedicated unit tests were introduced to ensure that all configurable parameters (e.g., Gaussian kernel size, standard deviation, patch size, bin count, match threshold) are within valid numerical and type constraints. These checks catch invalid user input early, reducing undefined

```

1  Unit Test Summary (2025-04-15_01-38-43)
2  =====
3
4  Program: test_specParams.py
5      Total tests: 9
6      Passed: 9
7      Failed: 0
8
9  Program: test_config.py
10     Total tests: 34
11     Passed: 34
12     Failed: 0
13
14  Program: test_imagesmooth.py
15     Total tests: 6
16     Passed: 6
17     Failed: 0
18
19  Program: test_kpdetect.py
20     Total tests: 7
21     Passed: 7
22     Failed: 0
23
24  Program: test_featdesc.py
25     Total tests: 4
26     Passed: 4
27     Failed: 0
28
29  Program: test_featmatches.py
30     Total tests: 6
31     Passed: 6
32     Failed: 0
33

```

Figure 7: Unit Test Summary.txt

behavior during runtime.

4. Synthetic Imagery for CI Integration

A minimal testing pipeline using synthetic image pairs was implemented in `test_main.py`. This allows the pipeline to be tested in continuous integration (CI) environments without relying on external image datasets. It also ensures the processing pipeline can execute

<div> <div>main</div> <div>CAS-741-Image-Correspondences / test / results / UnitTests-60f8e10 / 2025-04-15_01-38-43 /</div> </div>	
<div> <div>KiranSingh15</div> <div>Added unit tests from Github Actions for commit 60f8e10</div> <div>✓</div> </div>	
Name	Last commit message
..	
summary.txt	Added unit tests from Github Actions for commit 60f8e10
test_config_results.txt	Added unit tests from Github Actions for commit 60f8e10
test_featdesc_results.txt	Added unit tests from Github Actions for commit 60f8e10
test_featmatches_results.txt	Added unit tests from Github Actions for commit 60f8e10
test_imagePlot_results.txt	Added unit tests from Github Actions for commit 60f8e10
test_imagesmooth_results.txt	Added unit tests from Github Actions for commit 60f8e10
test_kpdetect_results.txt	Added unit tests from Github Actions for commit 60f8e10
test_main_results.txt	Added unit tests from Github Actions for commit 60f8e10
test_outputFormat_results.txt	Added unit tests from Github Actions for commit 60f8e10
test_specParams_results.txt	Added unit tests from Github Actions for commit 60f8e10
test_verifyOutput_results.txt	Added unit tests from Github Actions for commit 60f8e10

Figure 8: Generated Unit Test Reports

```

===== test session starts =====
platform linux -- Python 3.13.2, pytest-8.3.5, pluggy-1.5.0 --
/home/runner/work/CAS-741-Image-Correspondences/CAS-741-Image-
Correspondences/src/.venv_ifcs/bin/python
cachedir: .pytest_cache
rootdir: /home/runner/work/CAS-741-Image-Correspondences/CAS-741-Image-Correspondences
collecting ... collected 9 items

test/test_specParams.py::test_kernel_bounds PASSED [ 11%]
test/test_specParams.py::test_standard_deviation PASSED [ 22%]
test/test_specParams.py::test_fast_bounds PASSED [ 33%]
test/test_specParams.py::test_bin_bounds PASSED [ 44%]
test/test_specParams.py::test_patch_size_bounds PASSED [ 55%]
test/test_specParams.py::test_match_distance_limits PASSED [ 66%]
test/test_specParams.py::test_num_match_disp PASSED [ 77%]
test/test_specParams.py::test_avail_methods PASSED [ 88%]
test/test_specParams.py::test_selected_methods PASSED [100%]

===== 9 passed in 0.04s =====

```

Figure 9: Specification Parameters Unit Test Report

end-to-end with minimal dependencies.

5. Inclusion of Feature Metadata in Match Results

Feature match outputs were extended to include 256-bit binary descriptors for both the query and train features, image IDs, and matching scores. This change enables deeper validation of match quality and allows visual or statistical analysis of correspondence accuracy in test reports.

6. Standardized Test Summaries for Reporting

Each test script now generates a summary file (e.g., `test_kpdetect_results.txt`, `test_main_results.txt`) detailing test names, pass/fail status, and parameters. This facilitates automated result aggregation in CI pipelines and provides a consistent audit trail for testing history.

8 Automated Testing

All unit tests are automated to run via a pull request and Pytest Github Actions. These tests can be found in the [test](#). Each test is initiated by the [run_unit_checks.py](#) program, as shown in Figure 6.

9 Trace to Requirements

The traceability of both functional and nonfunctional requirements to system tests can be found in Table 1. We note that the functional requirements are entirely covered by the outlined tests. We also note that NFR3 has been omitted from the scope of testing, and that NF4 and NFR5 has been deferred at the time of release for Rev 1.0 due to resource constraints within the development team. Testing for these requirements will be implemented as part of development during the Summer of 2025.

10 Trace to Modules

A full outline of the traceability between the unit tests and the modules as outlined in the MIS is provided in Table 2.

Requirement	STFR-IS-01	STFR-KP-01	STFR-FD-01	STFR-FM-01	STNFR-RE-01	IFCS-DEMO-01
R1	X					
R2		X				
R3			X			
R4			X			
R5	X					
R6		X				
R7			X			
R8				X		
R9	X					
R10		X				
R11			X			
R12				X		
R13				X		
R14				X		
R15				X		
NFR1					X	
NFR2						X
NFR3	-	-	-	-	-	-
NFR4*	-	-	-	-	-	-
NFR5*	-	-	-	-	-	-

Table 1: Traceability matrix between modules and identified unit tests

11 Code Coverage Metrics

Test Name	M1	M2	M3	M4	M5	M6	M7	M8	M9	M10	M11
test_pipeline_synthetic_images	/	x	-	-	-	-	-	-	-	-	-
test_check_parameter_limits_valid	/	-	x	-	-	-	-	-	-	-	-
test_check_method_limits_valid	/	-	x	-	-	-	-	-	-	-	-
test_check_method_limits_invalid	/	-	x	-	-	-	-	-	-	-	-
test_kernel_bounds	/	-	-	x	-	-	-	-	-	-	-
test_standard_deviation	/	-	-	x	-	-	-	-	-	-	-
test_fast_bounds	/	-	-	x	-	-	-	-	-	-	-
test_bin_bounds	/	-	-	x	-	-	-	-	-	-	-
test_patch_size_bounds	/	-	-	x	-	-	-	-	-	-	-
test_avail_methods	/	-	-	x	-	-	-	-	-	-	-
test_selected_methods	/	-	-	x	-	-	-	-	-	-	-
test_output_keypoints_variable_size	/	-	-	-	x	-	-	-	-	-	-
test_output_descriptors_variable_size	/	-	-	-	x	-	-	-	-	-	-
test_output_matches_variable_size	/	-	-	-	x	-	-	-	-	-	-
test_check_match_uniqueness_valid	/	-	-	-	-	x	-	-	-	-	-
test_check_match_uniqueness_warns_for_same_ids	/	-	-	-	-	x	-	-	-	-	-
test_check_match_uniqueness_warns_with_matches	/	-	-	-	-	x	-	-	-	-	-
test_smooth_image_valid_gaussian	/	-	-	-	-	-	x	-	-	-	-
test_detect_keypoints_with_valid_orb	/	-	-	-	-	-	-	x	-	-	-
test_compute_descriptors_valid	/	-	-	-	-	-	-	-	x	-	-
test_match_features_no_loss	/	-	-	-	-	-	-	-	-	x	-
test_gen_kp_img_with_none_keypoints	/	-	-	-	-	-	-	-	-	-	x
test_gen_kp_img_no_flag	/	-	-	-	-	-	-	-	-	-	x
test_gen_kp_img_rich_keypoints	/	-	-	-	-	-	-	-	-	-	x
test_gen_kp_img_with_none_image	/	-	-	-	-	-	-	-	-	-	x
test_gen_matched_features_success	/	-	-	-	-	-	-	-	-	-	x

Table 2: Traceability matrix mapping unit tests to associated software modules(M2–M11).