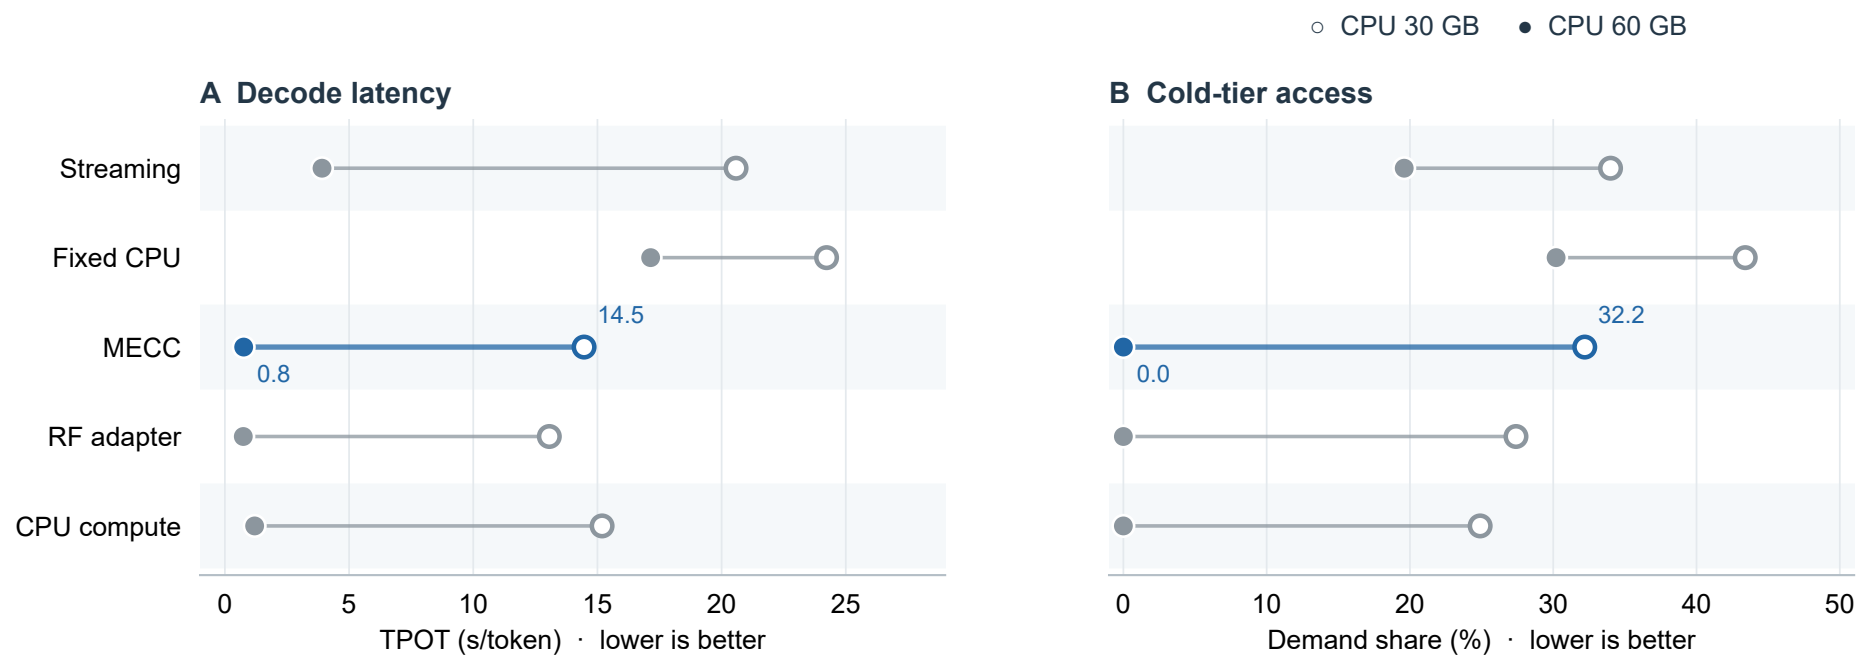

○ CPU 30 GB
● CPU 60 GB
A Decode latency
Streaming
Fixed CPU
MECC
RF adapter
CPU compute
14.5
0.8
0
5
10
15
20
25
TPOT (s/token) · lower is better
B Cold-tier access
32.2
0.0
0
10
20
30
40
50
Demand share (%) · lower is better