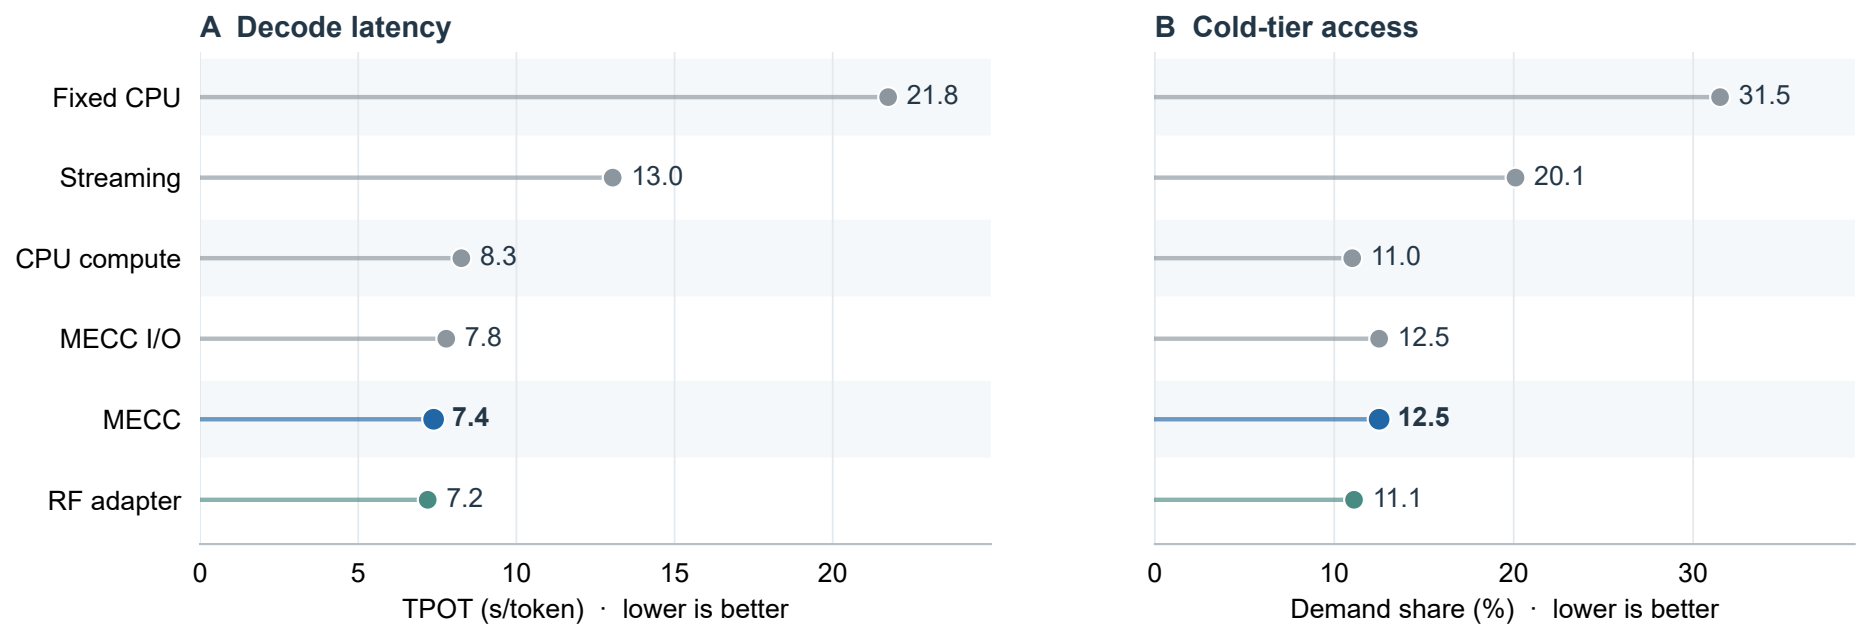
A Decode latency
Fixed CPU
Streaming
CPU compute
MECC I/O
MECC
RF adapter
21.8
13.0
8.3
7.8
7.4
7.2
0
5
10
15
20
TPOT (s/token) · lower is better
B Cold-tier access
31.5
20.1
11.0
12.5
12.5
11.1
0
10
20
30
Demand share (%) · lower is better