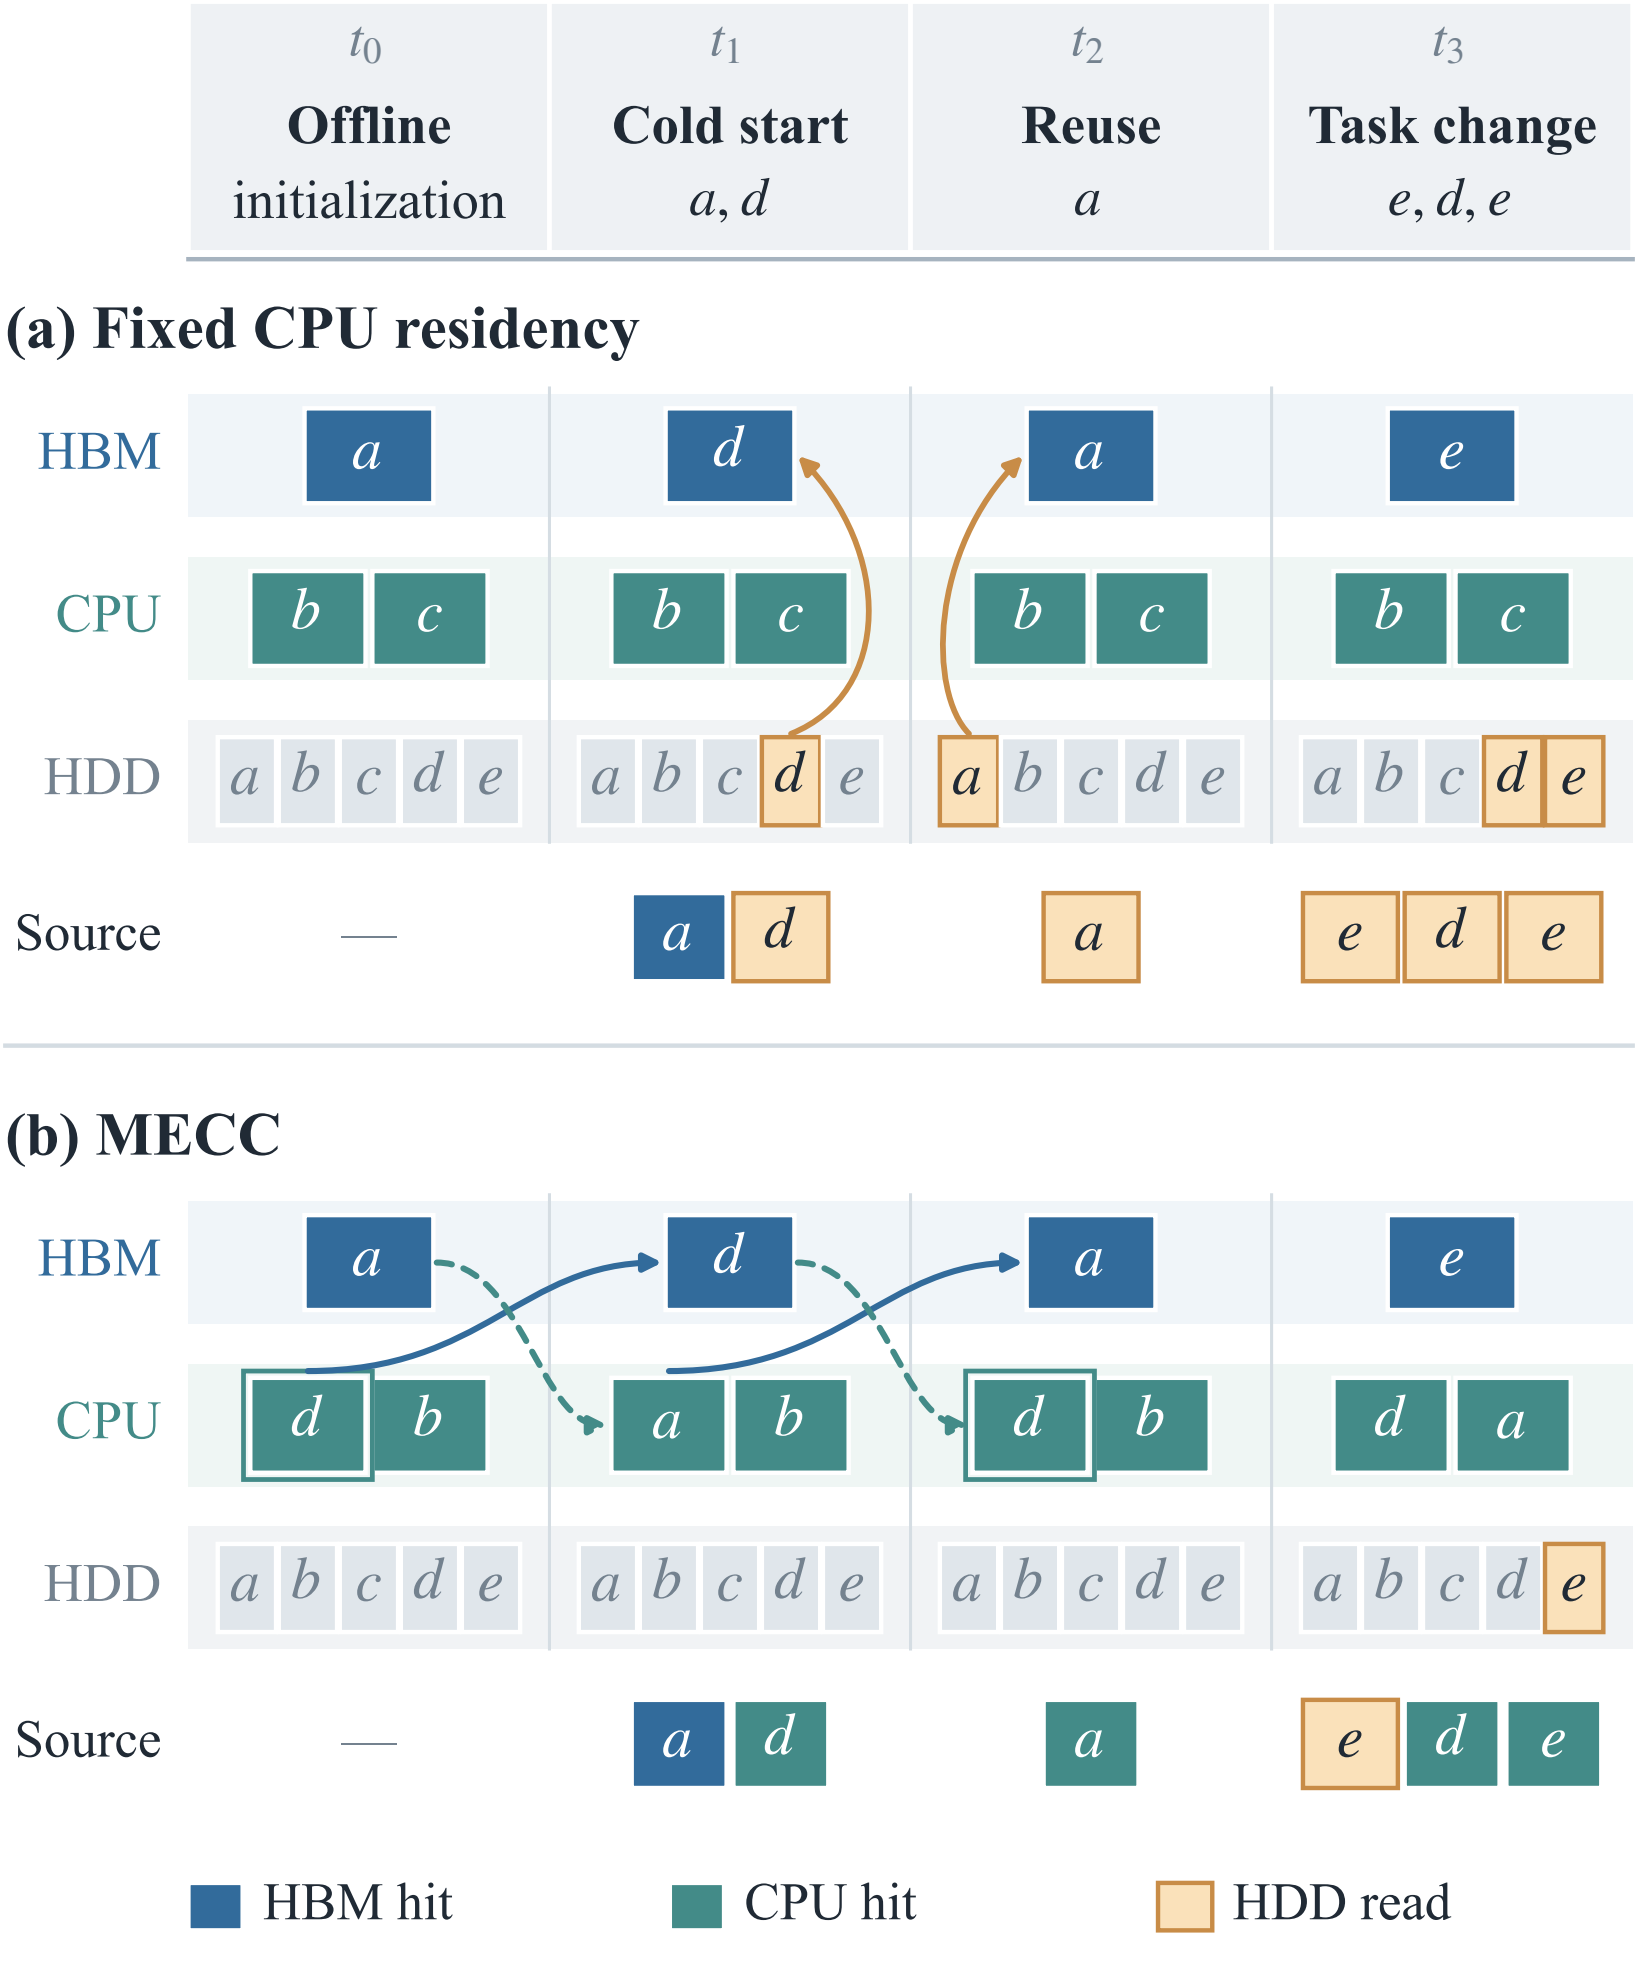
t_0
Offline
initialization
t_1
Cold start
a, d
t_2
Reuse
a
t_3
Task change
e, d, e
(a) Fixed CPU residency
HBM
CPU
HDD
Source
—
(b) MECC
HBM hit
CPU hit
HDD read