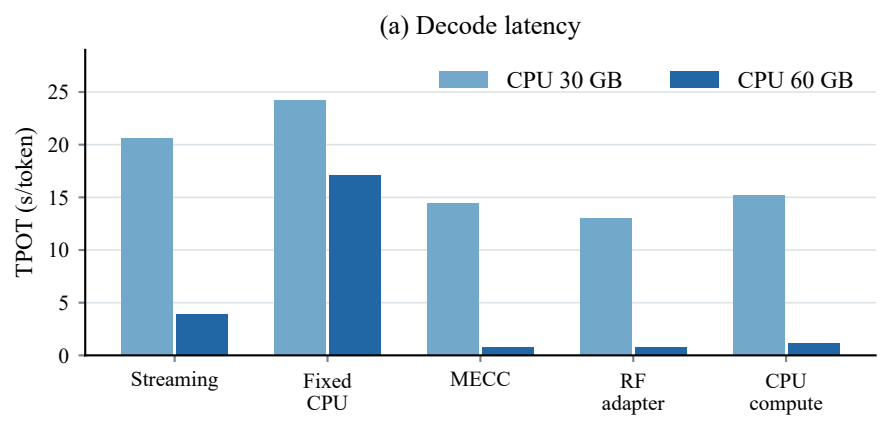
(a) Decode latency
CPU 30 GB
CPU 60 GB
TPOT (s/token)
0
5
10
15
20
25
Streaming
Fixed CPU
MECC
RF adapter
CPU compute

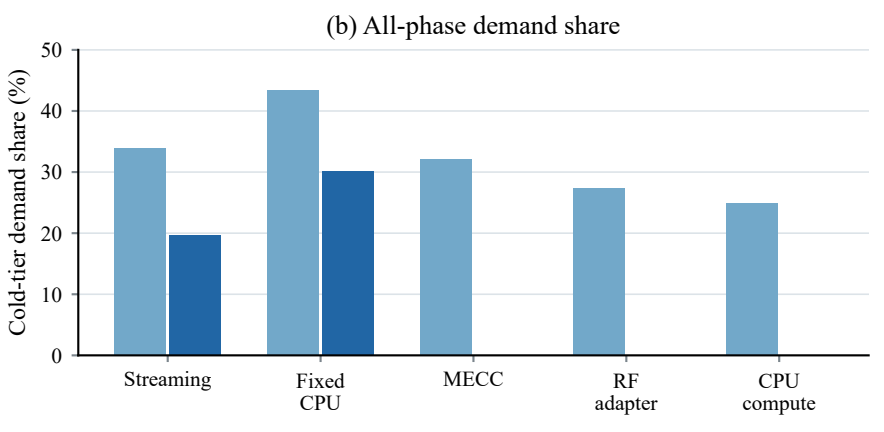
(b) All-phase demand share
Cold-tier demand share (%)
0
10
20
30
40
50
Streaming
Fixed CPU
MECC
RF adapter
CPU compute