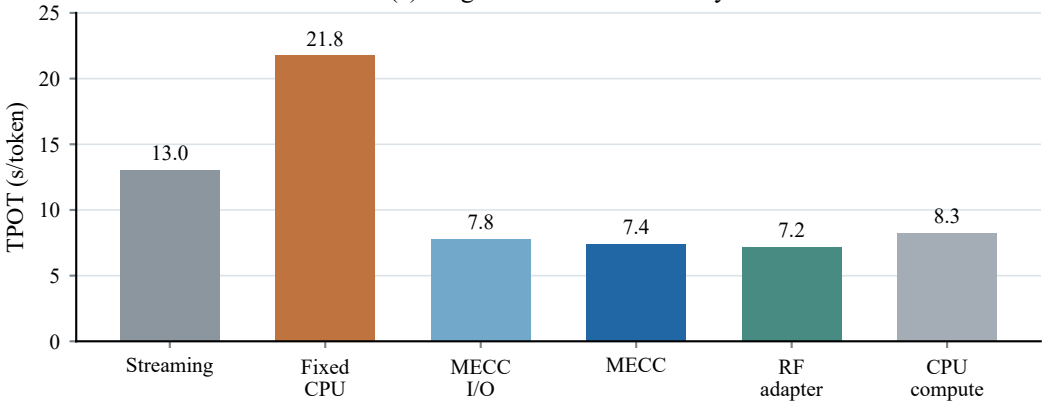
(a) Single-A100 decode latency
TPOT (s/token)
25
20
15
10
5
0
13.0
21.8
7.8
7.4
7.2
8.3
Streaming
Fixed CPU
MECC I/O
MECC
RF adapter
CPU compute

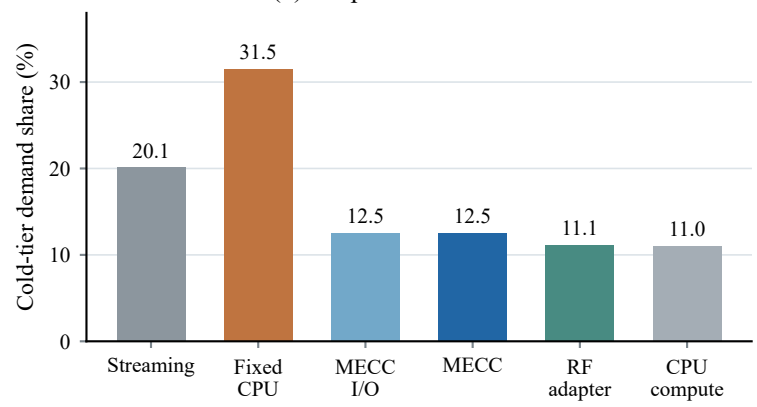
(b) All-phase demand share
Cold-tier demand share (%)
30
20
10
0
20.1
31.5
12.5
12.5
11.1
11.0
Streaming
Fixed CPU
MECC I/O
MECC
RF adapter
CPU compute