



USB C




Power


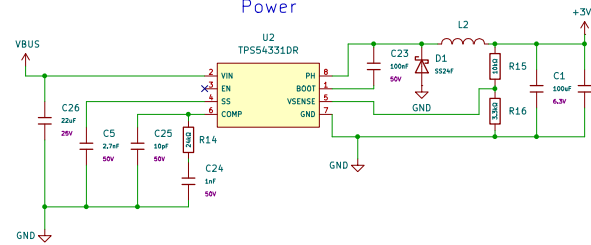


User_IO


Screen




Rotary Encoders



Primary Flash

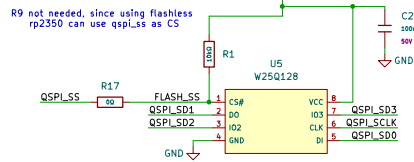


Secondary Flash/PSRAM

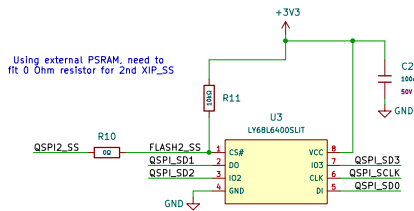


Optional Secondary flash or PSRAM (U4), using the second chip select (XIP_SS_N[1]) on GPIO0.
N.B. Pull-up R13 will be required as GPIOs default to pull-downs at power-up.

12MHz Crystal



Decoupling Caps



Raspberry Pi RP2350B QFN-80

GPIO0	77	USER_LED
GPIO1	78	GPIO1
GPIO2	79	GPIO2
GPIO3	80	GPIO3
GPIO4	1	GPIO4
GPIO5	2	GPIO5
GPIO6	3	GPIO6
GPIO7	4	GPIO7
GPIO8	6	QSPI2_SS
GPIO9	7	GPIO9
GPIO10	8	GPIO10
GPIO11	9	GPIO11
GPIO12	11	GPIO12
GPIO13	12	GPIO13
GPIO14	13	GPIO14
GPIO15	14	GPIO15
GPIO16	16	GPIO16
GPIO17	17	GPIO17
GPIO18	18	GPIO18
GPIO19	19	GPIO19
GPIO20	20	GPIO20
GPIO21	21	RQ_P1
GPIO22	22	RQ_P2
GPIO23	23	RQ_P2
GPIO24	24	Screen_RST
GPIO25	26	Screen_RST
GPIO26	27	Screen_DC
GPIO27	28	GPIO27
GPIO28	36	GPIO28
GPIO29	37	Screen_CS
GPIO30	38	Screen_CLK
GPIO31	39	Screen_DIN
GPIO32	40	GPIO32
GPIO33	42	LQ_P1
GPIO34	43	LQ_P2
GPIO35	44	LQ_P2
GPIO36	45	GPIO36
GPIO37	46	GPIO37
GPIO38	47	GPIO38
GPIO39	48	GPIO39

