MBS-fast Manual

August 12, 2026

Contents

1 Fullauto: practical and mathematical guide **2**
- 1.1 Start with the physical inputs . . . 2
- 1.2 Parameters: automatic versus fixed . . . 2
- 1.3 Controller sequence . . . 3
- 1.4 Sobol and the orientation measure . . . 3
  - 1.4.1 Why both alpha and phi exist . . . 4
- 1.5 Analytic work and numerical work . . . 4
- 1.6 Depth and cutoff differences . . . 5
- 1.7 Angular interpolation and acceptance . . . 5
- 1.8 Results and recovery . . . 5
- 1.9 GO and other modes . . . 6

2 Build **7**
- 2.1 Requirements . . . 7
- 2.2 CPU build . . . 7
- 2.3 GPU build . . . 7
- 2.4 EPYC Zen5, AVX-512, and AVX2 . . . 9
- 2.5 Legacy root Makefile . . . 9

3 Quick runs **9**

4 Physical model **10**
- 4.1 Pipeline . . . 10
- 4.2 Ray Jones matrices . . . 10
- 4.3 Dyadic rotation into the scattering basis . . . 10
- 4.4 Kirchhoff diffraction integral . . . 11
- 4.5 Coherent and incoherent Mueller accumulation . . . 11
- 4.6 Orientation averaging . . . 12
- 4.7 Scattering-angle weights . . . 12

5 Particles and sizes **12**
- 5.1 Native particle file and geometry export . . . 13

6 Orientation grids **14**
- 6.1 Symmetry-reduced SO(3) quadrature . . . 15
- 6.2 Parallel tracing of orientation files . . . 16
- 6.3 Reusing exact duplicate orientations . . . 17
- 6.4 Physical analytic control at exact backscatter . . . 17
- 6.5 Analytic physical components at all scattering angles . . . 18

7 Scattering grids **19**
- 7.1 Diffraction-limit and latitude-phi grids . . . 20
- 7.2 Unified convergence criterion . . . 21
- 7.3 Adaptive configuration file . . . 21
- 7.4 Why column symmetry does not divide Nphi . . . 21

8 Beam and trace cutoffs **22**
- 8.1 Coherent presets . . . 22

8.2 Individual controls . . . 22

9 GPU and multi-GPU **23**
9.1 CUDA backend . . . 23
9.2 FFT phi compression and error control . . . 23
9.3 Why the GPU version is faster . . . 24
9.4 Atomic and no-atomic GPU accumulation . . . 25
9.5 Automatic CUDA tracing profile . . . 26
9.6 Multi-size scans . . . 27

10 All flags **28**
10.1 Method, particle, and physical parameters . . . 28
10.2 Orientation flags . . . 28
10.3 Scattering grid and acceleration flags . . . 29
10.4 Output, diagnostics, and legacy flags . . . 30

11 Environment variables **30**

12 Output **32**

13 Calibrated multi-level GPU acceleration **33**

MBS-fast computes light scattering by non-spherical particles with geometrical ray tracing plus Physical Optics (PO) diffraction. The code is optimized for CPU OpenMP/MPI runs and CUDA GPU diffraction runs. This manual describes the current command line interface, build targets, grids, multi-GPU scans, and the main diffraction/Jones/Mueller formulas used by the implementation.

1 Fullauto: practical and mathematical guide

This guide describes the integrated code prepared for MBS-fast 2.0. For the extended Russian explanation and worked parameter definitions, see FULLAUTO_RU.md or HTML.

1.1 Start with the physical inputs

```
make -C cpu -j2
cpu/bin/mbs_po_mpi --method po --backend cpu \
  --particle 1 5 2 --ri 1.3116 0 --wavelength-um 0.532 \
  --fullauto 0.02 --output results/column_5um
```

The type-1 column has axial length 5 and basal diameter 2, in the same units as the wavelength. `0.02` means 2%. For a file particle, replace `--particle 1 5 2` with `--particle-file examples/cube.particle --resize-dmax-um 5`. Dmax is the maximum vertex separation, not a volume-equivalent diameter.

No Python controller or hand-written orientation file is required. Do not add an explicit Sobol selector to make fullauto use Sobol. Run one controller per output directory, without a multi-rank MPI launch.

For CUDA, build `make -C gpu fp64 GPU_ARCH=70 -j2` and use `gpu/bin/mbs_po_gpu_double --backend cuda` instead of the CPU executable/backend. Architectures 70, 86 and 89 correspond to V100, RTX 3080 Ti and RTX 4090. Add `--fullauto-theta-range 0 25` for the forward cone or `--fullauto-theta-range 170 180` for the backward cone. The default GPU list is `0`; `--fullauto-gpus 0,1` shares work across two visible devices. Indices are relative to CUDA_VISIBLE_DEVICES.

A fullauto controller handles one size. Legacy multisize flags are a separate workflow. Give independent sizes different output directories and GPU resources.

1.2 Parameters: automatic versus fixed

Quantity	Automatic behavior	Explicit option
Start per seed	Empirical size/wavelength/range model, at least 512	`--fullauto-initial N` fixes only the start

Quantity	Automatic behavior	Explicit option
Reflection target	Paired depth search from 6 through 18	`--max-reflections N` fixes the target
Depth pilot	Starts at min(512, initial N)	`--fullauto-depth-pilot N`
Azimuth phi	Cost/variance calibration with sampled Haar alpha	`--phi-points N` fixes it
Output angles	Size-dependent reference grid	`--theta-grid-file FILE` fixes output angles
Interpolation	Local cubic support, matched residual checks	Allowance is EPS/4
Pruning in coherent PO	Balanced estimate plus coupled uncut correction	Explicit cutoff settings replace this automatic policy
Analytic controls	Independent fitting and validation	`--fullauto-analytic-controls off` disables them
Symmetry	Verify supported body rotations and mirror reduction	Explicit symmetry overrides are the user's physical assertion
Execution	Worker threads, chunks and cache/work limits	Explicit execution settings take precedence

-\/-max-orientations limits growth; exhausting it does not certify convergence. Explicit depth disables automatic depth selection. A final depth check can still reject that fixed target. `--fullauto-final-checks off` omits final rechecks and is recorded as such; it does not make omitted checks pass.

Example with fixed depth and phi, without controls or pruning:

```
cpu/bin/mbs_po_mpi --method po --backend cpu \
  --particle 1 5 2 --ri 1.3116 0 --wavelength-um 0.532 \
  --fullauto 0.02 --fullauto-theta-range 170 180 \
  --max-reflections 8 --phi-points 4 --fullauto-initial 512 \
  --cutoff-profile off --fullauto-analytic-controls off \
  --output results/fixed_settings
```

1.3 Controller sequence

The controller validates inputs and restores compatible saved work, chooses initial budgets and the requested output grid, and selects reflection depth unless fixed. CUDA uses a bounded kernel/phi pilot before the depth comparison; complete production tuning follows at the selected depth.

Next it verifies supported symmetries, fits control coefficients on training scrambles and validates them on different scrambles. It chooses phi and execution settings from measured cost and variance. Unsupported controls are disabled while the full PO calculation remains available.

Production evaluates support/check angles, depth levels and eight replicas. Completed blocks are durable and reused. Each round estimates statistical uncertainty, matched interpolation residuals and prefix stability. The next round increases samples or angular support where needed. After working criteria pass, enabled independent and physical audits run. An unresolved limit or failed audit is not a converged result.

1.4 Sobol and the orientation measure

An orientation is $R = R_z(\alpha)R_y(\beta)R_z(\gamma)$. The isotropic average is

$$\langle M \rangle = \frac{1}{8\pi^2} \int_0^{2\pi} d\alpha \int_0^{\pi} \sin\beta \, d\beta \int_0^{2\pi} M(R, \theta) \, d\gamma.$$

This is Haar measure on SO(3), the group of rotations in three dimensions. For full-domain Sobol points (u, v, w), use $\cos\beta = 1 - 2u$, $\gamma = 2\pi v$ and $\alpha = 2\pi w$. Uniform beta without the sine weight is incorrect. Verified symmetry can reduce the domain with the proper reconstruction.

Nested Owen scrambling randomizes a Sobol sequence while retaining its space-filling structure. Eight independent seeds give eight complete estimates, not eight independent points. Samples within a

replica are not ordinary IID Monte Carlo. Power-of-two prefixes allow incremental refinement and reuse. -\/-sobol-offset continues a native worker prefix without discarding prior work.

Let Y_r be the complete level/control/cutoff estimate of replica r:

$$\bar{Y} = \tfrac{1}{8}\sum_r Y_r, \qquad s^2 = \tfrac{1}{7}\sum_r (Y_r - \bar{Y})^2, \qquad h_{95} = t_{0.975,7}s/\sqrt{8}.$$

The Student-t factor is approximately 2.365. The combined replica preserves covariances between coupled differences. Normalized ratios account for numerator/denominator covariance and unresolved denominators; halved prefixes supply an additional stability check.

Sobol is the current production default and a practical choice for the measured PO campaigns. Its extensible prefixes and coupled differences suit irregular integrands and local refinement. This does not establish a universal advantage over Lebedev or Wigner rules on every shape or smooth integrand.

1.4.1 Why both alpha and phi exist

Alpha rotates the particle around the illumination axis; phi changes the observation azimuth. With full Haar alpha, extra phi samples retain the same expectation and can reduce variance using the same traced beams. Polarized quantities also require the correct Stokes-basis rotation. More phi can be cheaper than retracing more orientations, so the controller chooses their cost tradeoff. A sixfold body symmetry does not divide laboratory alpha by six.

Fullauto supplies -\/-haar-alpha in PO worker recipes. `--phi-points 4` fixes four observation azimuths. For a starting count of 32768 per seed use `--fullauto-initial 32768`, not a competing manual orientation selector.

1.5 Analytic work and numerical work

The diffraction of a planar polygonal beam contains $F(\mathbf{q}) = \int_A e^{i\mathbf{q}\cdot\mathbf{x}}\, dA$. Constant-amplitude polygon integration reduces to edge expressions, with stable limits/moments near zero phase and small denominators. This is analytic diffraction at one orientation, not a closed orientation average of the entire particle.

An analytic control C with known mean μ_C uses

$$\widehat{M} = \overline{M - bC} + b\mu_C.$$

The coefficient b is fitted independently. Internal paths, occlusion and interference missing from C remain in the full numerical residual. Averaging Fresnel coefficients and substituting them at every reflection would not be this estimator. In coherent PO, amplitudes are summed before forming Mueller matrices. Incoherent PO sums beam intensities and uses a different path.

Facet/self-reflection and shadow components provide physical control means. For incidence cosine μ, the Fresnel coefficients r_s, r_p give $R(\mu) = (|r_s|^2 + |r_p|^2)/2$. A Legendre moment is, for example, $c_\ell = (2\ell+1)\int_0^1 R(\mu)P_\ell(\mu)d\mu/2$; actual kernels also include projection/geometric weights. Legendre addition and plane-wave expansions integrate angular phase factors using spherical Bessel functions. Smooth Fresnel quadrature, radial tables and parts of the edge preparation remain numerical. Means are shared across angles and cached for compatible inputs.

-\/-analytic-facet-average requests the facet control. `--analytic-shadow-control circular` uses a circular-aperture control with a geometry-derived area, with model differences retained in the residual. `--analytic-mean-cache FILE` specifies its persistent mean cache. Fullauto can choose these automatically; forcing a control is not a guarantee that it reduces variance or setup time. Polarization controls undergo separate validation; analytic M11 control does not analytically solve all 16 elements.

1.6 Depth and cutoff differences

For depth levels $n_0 < \cdots < n_L$,

$$E[M_{n_L}] = E[M_{n_0}] + \sum_{\ell=1}^{L} E[M_{n_\ell} - M_{n_{\ell-1}}].$$

Both terms of a difference use identical orientations. Where supported, a trace produces both depths. Each term is a complete coherent Mueller estimate at its own depth, so interference terms are retained. A low-variance correction needs fewer samples than the expensive full solution.

Default coherent PO pruning uses $\widehat{M} = \overline{B}_N + \overline{(O-B)}_m$, where B is balanced and O is uncut. The physical target remains uncut, with cutoff correction uncertainty included in the complete replicas. Explicit `--cutoff-profile balanced` fixes a preset and bypasses this automatic policy; it is not an alias for the corrected estimator. `--cutoff-profile off` fixes no pruning.

1.7 Angular interpolation and acceptance

The output grid, interpolation supports and guard angles are distinct. For fixed supports local cubic interpolation I is linear in their matrix values. The check is $\Delta = M(\theta) - I[M_{support}](\theta)$ on matched orientations. A separate checkpointed residual budget prevents a difficult neighbor's very large production count from automatically inflating this check. Both sides use the same phi rule even if production phi varies by angle.

At a guard, confirmed residual structure can add support; a noisy residual first grows its coupled sample. Newly inserted production angles use ordinary startup budgets. Complete cached eight-seed prefixes remain reusable. The round scheduler uses measured cost to limit new work; its 1800 worker-second per-GPU target is advisory, not a wall-clock promise.

The first production round also uses that cost target. The empirical initial count is an upper proposal: before reading production matrix values, the controller chooses a power-of-two base count from measured timings, starting at 512 when timings are missing. Complete cached eight-seed prefixes and the correction minima are retained. initial_production_work.json records the proposal, selected count and forecast. Explicit -\/-fullauto-initial, a loaded adaptive configuration and `--fullauto-local off` keep their requested start. Later rounds use the ordinary error-driven refinement and unchanged acceptance tests. A first-round estimate can therefore appear before the empirical count has been reached; it is not a convergence declaration.

All 16 errors are scaled by local M11, not by a potentially zero Mij. Ratio checks use absolute errors in Mij/M11. At each component/angle, statistical and interpolation terms plus fixed reserves must fit EPS; take the maximum **after** this componentwise sum. At unchecked output angles the full EPS/4 interpolation allowance is retained. Independent and physical checks have their own recorded policies.

These are pointwise uncertainty estimates. They are not a global simultaneous confidence bound, an error bound on PO versus Maxwell's equations, or proof that every unsampled angular feature has been found.

1.8 Results and recovery

Old output directories acquire a compact discovery journal on their first resume with the current controller. The initial migration still reads the old metadata once; later resumes read completed_jobs.jou rnal and inspect only directories missing from it. Existing matrices and completion markers are not rewritten. The journal accelerates discovery; hashes and source dependencies are still checked before a saved result enters an estimator.

A persistent worker that reports a recoverable RAM-budget failure is retried once in a fresh process with exactly the same sampling. The failed attempt's partial output is never committed, and its log is saved as `stdout.memory-retry.log`. For the system RAM reserve guard, the controller waits at most 60 seconds for the reserve to recover after releasing that worker. It records resource_wait.json and memory-retry events. The reserve is not lowered. Continued pressure or an unrelated numerical/CUDA failure stops the task and preserves completed checkpoints for recovery.

Read fullauto_status.json for convergence and selected settings. intermediate_current.json points to the last published matrix snapshot. execution_progress.json reports active work, not a newly measured accuracy. fullauto_history.jsonl records parameter changes and execution events.

mueller_fullauto.dat contains the requested output grid. Guard rows can contain interpolation even when a separate direct check exists. Read point_type and value_source in mueller_fullauto_annotated.csv; use mueller_evaluated.dat for direct estimates. Empty error fields mean unavailable, not zero. parameters_accuracy.csv and interpolation_orientation_budget.csv in each snapshot distinguish production and residual sample budgets.

Resume the exact command with the same binary and output directory. Keep the whole directory, including `jobs/`, configuration, source manifests and checkpoints. An incomplete block can repeat; complete blocks are reused. Schema 6 stores both budgets and residual phi; older checkpoint parsing does not by itself prove cross-binary numerical compatibility.

A new binary requires an exact tested compatibility receipt before `--fullauto-resume-compatible OLD_BINARY` can be used. Do not edit fingerprints. `--fullauto-refine-window A B EPS` requests a documented child-window refinement from a retained parent recipe rather than silently changing its physics.

`scripts/run_fullauto_service.sh UNIT BINARY LOG [arguments...]` installs and starts a user systemd service for process recovery. Numerical decisions remain native. It is an optional launcher, not a required Python audit.

1.9 GO and other modes

```
cpu/bin/mbs_po_mpi --method go --backend cpu \
  --particle 1 100 50 --ri 1.3116 0 --wavelength-um 0.532 \
  --fullauto 0.02 --output results/column_go
```

GO analytically averages alpha and computes fixed finite solid-angle bins. There is no PO cubic interpolation. Forward/backward delta matrices are separate integrated masses in mueller_forward.dat and mueller_backward.dat, not point values of a continuous phase function. GO mirror defaults off; supported explicit reduction reconstructs $(M + PMP)/2$, $P = diag(1, 1, -1, -1)$, for nonabsorbing built-in types 1/10. See GO mirror and GO balanced.

Extinction-only is a separate convex CPU/Hammersley PO workflow without an angular grid. It does not supply full coherent albedo.

2 Build

2.1 Requirements

Component	Required for	Notes
GCC >= 9 or Clang >= 14	CPU and host CUDA code	GCC is the normal path on EPYC
OpenMP	CPU parallelism	GCC links with `libgomp`
MPI	`cpu/` split build	`mpicxx` is used when available
CUDA toolkit	`gpu/` split build	`nvcc`, `libcudart`, `libcufft`
NVIDIA driver	GPU runs	Must support the requested `sm_XX` binary

The split build is the recommended build path. CPU objects are kept under `cpu/build/`; CUDA objects are kept under `gpu/build/`. The shared physics code remains in `src/`.

2.2 CPU build

```
# MPI + OpenMP CPU binary
make -C cpu -j

# Run one MPI rank with 64 OpenMP threads
OMP_NUM_THREADS=64 cpu/bin/mbs_po_mpi --po -p 1 125.9 78.09 \
    --ri 1.3116 0 -w 0.532 -n 12 --oldauto 2 \
    --grid 0 180 600 180 --threads 64 --close -o out_cpu

# Run four MPI ranks, each with 16 OpenMP threads
mpirun -np 4 cpu/bin/mbs_po_mpi --po -p 1 125.9 78.09 \
    --ri 1.3116 0 -w 0.532 -n 12 --oldauto 2 \
    --grid 0 180 600 180 --threads 16 --close -o out_cpu_mpi
```

Debug help build:

```
make -C cpu debug
cpu/bin/mbs_po_mpi_debug --help-debug
```

2.3 GPU build

```
# Default/reference GPU binary: FP64 with precise math
PATH=/usr/local/cuda/bin:$PATH make -C gpu -j

# Explicit variants
make -C gpu fp32      -j   # gpu/bin/mbs_po_gpu_float
make -C gpu fp32_consumer -j # gpu/bin/mbs_po_gpu_float_consumer
make -C gpu fp64      -j   # gpu/bin/mbs_po_gpu_double
make -C gpu fp32_fast -j   # gpu/bin/mbs_po_gpu_float_fast
make -C gpu fp64_fast -j   # gpu/bin/mbs_po_gpu_double_fast
```

Target	Binary	CUDA precision	Fast math	Typical use
`make -C gpu` or `make -C gpu fp64`	gpu/bin/mbs_po_gpu_double	FP64	no	Numerical reference and production default
`make -C gpu fp32`	gpu/bin/mbs_po_gpu_float	FP32	no	Calibrated FP32 throughput
`make -C gpu fp32_consumer`	gpu/bin/mbs_po_gpu_float_consumer	FP32	no	Consumer GPU throughput with FP32 phase trigonometry
`make -C gpu fp32_fast`	gpu/bin/mbs_po_gpu_float_fast	FP32	yes	Experimental profile; benchmark after validation

Target	Binary	CUDA precision	Fast math	Typical use
`make -C gpu fp64_fast`	gpu/bin/mbs_po_gpu_double_fast	FP64	yes	FP64 throughput after validation
`make -C gpu double_debug`	gpu/bin/mbs_po_gpu_double_debug	FP64	yes	Debug help and diagnostics

The low-level build variable is `GPU_PHASE_TRIG=precise|consumer`. The consumer value is valid only with FP32 storage, has a separate object directory, and does not enable `--use_fast_math`. The supported shortcut is `make -C gpu fp32_consumer -j`. Run `make test_cuda_consumer` on the target GPU after building.

FP32 applies to diffraction-beam storage, Jones sums, and Mueller output. Visibility/topology tracing, optical paths, absorption, cancellation-prone polygon moments, and the common beam-centre phase remain FP64. The precise FP32 binary constructs and evaluates vertex phases in FP64. The consumer binary forms their coordinate-dependent part in FP32 and uses `sincosf`, while adding the FP64 centre phase only in the final argument. `--version` reports both phase precisions, the math profile, and target architecture.

Verify every rebuilt binary before starting a queue:

```
gpu/bin/mbs_po_gpu_double --version  # fp64-diffraction-storage ... precise-math
gpu/bin/mbs_po_gpu_float --version   # fp32-diffraction-storage ... precise-math
gpu/bin/mbs_po_gpu_float_consumer --version  # phase-build-mixed phase-trig-fp32
```

CUDA host compilation requires exactly one FP32/FP64 profile. A binary that reports `unknown-precision` is stale or was built outside the supported profiles and must not be used for production calculations.

On an RTX 3080 Ti, a representative absorbing nonconvex test ($L = 20$ μm, 192 SO(3) orientations, $N_\phi = 288$, $N_\theta = 144$) gave the following medians:

Profile	Time	Speedup over FP64	Mueller error against FP64
Precise FP64	8.56 s	1.00	reference
Precise mixed FP32	5.76 s	1.49	global $L_2 = 5.68 \times 10^{-8}$
Consumer FP32	3.25 s	2.63	global $L_2 = 2.82 \times 10^{-7}$

After calibration, the consumer FP32 binary is the recommended throughput profile. It was 1.77 times faster than precise mixed FP32. Across convex, concave, absorbing, nonabsorbing, $L = 5 \ldots 500$ μm, and 8–20 reflection probes, the largest side/back M11 L2 error was 8.4×10^{-5}; one weak off-diagonal element reached 5.3×10^{-3}. Whole-kernel fast math was about 9% slower than the consumer profile. Final reference points and numerically sensitive cases should still be checked in FP64.

The mixed phase-build optimization was checked separately on an RTX 3080 Ti with hexagonal, concave, aggregate, and bullet-rosette particles up to $L = 1000$ μm. Relative to FP64 phase construction with the same consumer `sincosf`, diffraction-kernel time decreased by 4.6–8.3% and complete GPU diffraction time by 4.4–7.9%. The largest global Mueller change was 4.3×10^{-8}; the largest relative change exactly at 180° was 3.7×10^{-5}. Complete FP32 phase construction was faster but was rejected because its exact-backscatter error reached 0.68% for the bullet rosette.

The GPU split build enables CUDA diffraction by default. `--gpu` is accepted but optional. Use `--cpu` only when you deliberately want the CPU diffraction backend from a GPU-capable binary.

The Makefile detects the GPU compute capability with `nvidia-smi`. Override when needed:

```
# Ampere, e.g. RTX 3080 Ti
make -C gpu fp32_consumer -j GPU_ARCH=86

# Ada, e.g. RTX 4070
make -C gpu fp32 -j GPU_ARCH=89
```

2.4 EPYC Zen5, AVX-512, and AVX2

`scripts/detect_arch_flags.sh` is used by the Makefiles through `ARCH_FLAGS`. On a native machine, the safest high-performance option is usually:

```
make -C cpu clean
make -C cpu -j ARCH_FLAGS="-march=native -mtune=native"

make -C gpu clean
make -C gpu double_fast -j ARCH_FLAGS="-march=native -mtune=native"
```

For named AMD targets:

CPU target	GCC/Clang flags	Notes
EPYC Zen2	`ARCH_FLAGS="-march=znver2 -mtune=znver2"`	AVX2/FMA path
EPYC Zen3	`ARCH_FLAGS="-march=znver3 -mtune=znver3"`	AVX2/FMA path
EPYC Zen4	`ARCH_FLAGS="-march=znver4 -mtune=znver4"`	AVX-512 capable on GCC versions that support it
EPYC Zen5	`ARCH_FLAGS="-march=znver5 -mtune=znver5"`	Use with a compiler that knows `znver5`
Portable AVX2	`ARCH_FLAGS="-O3 -mavx2 -mfma"`	Runs on AVX2 machines
Explicit AVX-512	`ARCH_FLAGS="-O3 -mavx512f -mavx512dq -mavx512cd -mavx512bw -mavx512vl"`	Use only on machines that support these flags

There is no GCC/Clang option named `AVX12`. If the intended target is Zen5 with AVX-512, use `-march=znver5` when the compiler supports it. If the compiler is older, either upgrade GCC/Clang or use the explicit AVX-512 flags above after checking `lscpu | grep avx512`.

2.5 Legacy root Makefile

The root `Makefile` still exists for compatibility:

```
make                          # bin/mbs_po, CPU
make gpu_double_fast          # delegates to gpu/double_fast
make gpu_float_fast           # delegates to gpu/float_fast
make USE_CUDA=1               # legacy single-tree CUDA build
```

Prefer the split `cpu/` and `gpu/` builds for normal work.

3 Quick runs

```
# GPU double, oldauto orientation grid, full 0..180 degree output
gpu/bin/mbs_po_gpu_double_fast --po -p 1 125.9 78.09 \
    --ri 1.3116 0 -w 0.532 -n 12 --oldauto 2 \
    --grid 0 180 600 180 --threads 64 --close -o hex_gpu_double

# Same run, force CPU backend from the GPU binary
gpu/bin/mbs_po_gpu_double_fast --po --cpu -p 1 125.9 78.09 \
    --ri 1.3116 0 -w 0.532 -n 12 --oldauto 2 \
    --grid 0 180 600 180 --threads 64 --close -o hex_cpu_from_gpu_bin

# File particle scaled by equivalent size parameter
gpu/bin/mbs_po_gpu_float_fast --po --pf particle.dat --k_eq 58.81 \
    --ri 1.6 0.002 -w 1.064 -n 14 --oldauto 2 --pole \
    --grid 0 180 600 180 --threads 16 --close -o particle_keq

# Two-point forward/backward check
```

```
gpu/bin/mbs_po_gpu_double_fast --po -p 1 125.9 78.09 \
    --ri 1.3116 0 -w 0.532 -n 1 --oldauto 2 --pole \
    --grid 0 180 600 1 --threads 64 --close -o check_0_180
```

4 Physical model

4.1 Pipeline

Stage	Main code path	Result
Particle setup	`src/particle`, `src/main.cpp`	Facets, normals, area, volume, symmetry
Geometrical tracing	`src/scattering`, `src/tracer`, `src/Splitting.cpp`	Output beams with direction, polygon, area, optical path, Jones matrix
PO diffraction	HandlerPO::ApplyDiffraction*, Handler::DiffractIncline*, CUDA equivalents	Far-field Jones amplitude per beam and direction
Coherent sum	`HandlerPO::AddToMueller`, GPU fused Mueller kernels	Sum Jones matrices over beams for one orientation
Mueller conversion	`src/math/Mueller.cpp`	4x4 Mueller matrix
Orientation average	`HandlerPOTotal`, `TracerPOTotal`	Final randomly oriented Mueller matrix

4.2 Ray Jones matrices

Each traced beam carries a 2x2 complex Jones matrix `beam.J`. Refraction and reflection multiply it by Fresnel coefficients in `Splitting.cpp`. The two polarization channels are the local vertical/horizontal basis of the incident and outgoing ray.

For a beam with local Jones matrix

```
J = [ Jvv  Jvh ]
    [ Jhv  Jhh ],
```

the code treats `J` as the coherent amplitude transform accumulated along the ray path. Cutoffs based on `|J|^2`, area, or `|J|^2*area` can remove weak beams before expensive diffraction.

4.3 Dyadic rotation into the scattering basis

Before adding a beam to a detector direction, the beam-local Jones matrix must be expressed in the detector polarization basis. `HandlerPO::RotateJones` and `RotateJonesFast` build this 2x2 rotation/projection using dot products between:

Vector	Meaning
`beam.Direction()`	Beam propagation direction after tracing
`direction`	Requested far-field scattering direction
`vf`	Forward reference direction
`info` polarization vectors	Precomputed beam polarization basis

The optimized CPU and CUDA paths use the transversality of $\mathbf{v}_f$ and $\mathbf{v}_t = \mathbf{v}_f \times \mathbf{s}$ to avoid constructing longitudinally projected temporary vectors. With $\mathbf{X}_T = \mathbf{n} \times \mathbf{D}_T$ and $\mathbf{X}_P = \mathbf{n} \times \mathbf{D}_P$, the same rotation is evaluated as

$$\mathbf{R}_{\text{out}} = \frac{1}{2} \begin{pmatrix} \mathbf{X}_T \cdot \mathbf{v}_t - \mathbf{N}_T \cdot \mathbf{v}_f & \mathbf{X}_P \cdot \mathbf{v}_t - \mathbf{N}_P \cdot \mathbf{v}_f \\ \mathbf{X}_T \cdot \mathbf{v}_f + \mathbf{N}_T \cdot \mathbf{v}_t & \mathbf{X}_P \cdot \mathbf{v}_f + \mathbf{N}_P \cdot \mathbf{v}_t \end{pmatrix}.$$

The omitted term is parallel to $\mathbf{s}$, whereas both output basis vectors are perpendicular to $\mathbf{s}$. This scalar-triple-product reduction is exact, not a polarization approximation, and removes two temporary vectors and their longitudinal projections from every beam/detector-direction contribution.

The effective far-field Jones contribution has the structure used in `ApplyDiffractionFast`:

```
J_beam(theta, phi) = F_edge(theta, phi) * R_out(theta, phi) * F_n(theta, phi)
```

where:

Factor	Code	Meaning
F_edge	DiffractInclineFast, DiffractIncline, DiffractInclineAbs	Scalar Kirchhoff edge diffraction integral for the beam polygon
R_out	RotateJones or KarczewskiJones	Jones-basis rotation/projection from beam coordinates to scattering coordinates
F_n	ComputeFnJones	Fresnel/Jones correction for the beam normal and direction

The optional --karczewski flag replaces the default rotation with the Karczewski polarization matrix. The code comments note that M11 is unchanged because the Frobenius norm is preserved, while polarization-sensitive elements can change.

The transverse norms are evaluated with extthypot, and each basis is validated before normalization. A degenerate pole configuration or a non-finite result falls back to the default extttRotateJones. This safeguard prevents extttNaN values but does not turn the incomplete GOAD convention implementation into a physical reference.

4.4 Kirchhoff diffraction integral

For each traced output beam the illuminated aperture is a polygon. The PO far field is evaluated by a boundary/edge form of the Kirchhoff integral. In code this lives in:

Function	Use
Handler::DiffractIncline	CPU scalar non-absorbing edge integral
Handler::DiffractInclineFast	CPU optimized edge integral with precomputed edge data
Handler::DiffractInclineAbs	Absorbing variant
GpuDiffraction.cu kernels	CUDA implementation of the same aperture/edge calculation

Conceptually the scalar diffraction factor is the aperture phase integral

```
F(q) = integral_A exp(i k q.r) dA,
```

where A is the projected beam polygon, k = 2*pi/lambda, and q is the difference between the outgoing beam direction and the requested far-field direction. The implementation evaluates the polygon integral through its edges to avoid sampling the aperture area directly. For an edge from vertex a to b, the contribution is a stable complex exponential difference divided by the corresponding phase denominator; special small-denominator branches use sinc-like limits.

The GPU and CPU branches should use the same geometry, phase convention, and theta grid. Differences normally come from precision (float vs double), fast math, FFT interpolation, atomics/reduction order, and special pole or endpoint handling.

4.5 Coherent and incoherent Mueller accumulation

Default PO mode is coherent per orientation:

```
J_total(theta, phi) = sum_beams J_beam(theta, phi)
M(theta, phi)       = Mueller(J_total(theta, phi))
```

With --incoh, the conversion happens before beam summation:

```
M(theta, phi) = sum_beams Mueller(J_beam(theta, phi))
```

The Jones-to-Mueller conversion is implemented in src/math/Mueller.cpp. For Jones elements S1..S4, the code computes the standard 4x4 real Mueller matrix from bilinear products such as |S1|^2, |S2|^2, Re(S1 conj(S2)), and Im(S1 conj(S2)).

The coherent sum is limited to ray paths of one particle at one fixed orientation. For a randomly and independently oriented ensemble, the code first forms Mueller(J_total) for each orientation and then

averages Mueller matrices with orientation weights. Jones matrices from distinct orientations cannot be summed without particle positions and relative incident phases. The deprecated `--coherent-orientations` option is therefore disabled; its previous implementation was effectively the ordinary incoherent orientation average.

This single-particle model does not reproduce coherent backscattering of a particulate medium caused by interference of reciprocal multiple scattering paths between distinct particles. That problem requires a multi-particle solver with particle positions and inter-particle field propagation.

`--beam-cutoff*` and `--trace-cutoff*` remove amplitudes before coherent summation and can bias cross terms even when the removed intensities are small. Validate backscatter with `--cutoff-profile safe` or `--cutoff-profile off`.

4.6 Orientation averaging

For randomly oriented particles, each orientation produces a Mueller matrix on the scattering grid. `HandlerPOTotal` and `TracerPOTotal` average orientations with the beta/gamma weights selected by the orientation mode. At beta poles, `--pole` uses one gamma value because all gamma rotations are equivalent at the exact pole. In current code, `--pole` keeps beta endpoints instead of midpoint beta sampling, so the beta pole is actually present in the grid.

4.7 Scattering-angle weights

Uniform theta grids output `Nth + 1` rows. `2pi*dcos` is the solid-angle ring weight assigned to the theta row:

```
dOmega(theta_j) = 2*pi * (cos(theta_left) - cos(theta_right))
```

For endpoint rows the interval is half-width and clipped to the requested range. For a full `0..180` grid the sum of `2pi*dcos` over all rows is `4*pi`.

5 Particles and sizes

Flag	Arguments	Description
`-p`	`TYPE PARAMETERS...`	Built-in particle. Exactly one of `-p` or `--pf` is required.
`--pf`	`FILE`	Load particle from file.
`--save-geometry`	`FILE`	Save the effective particle, after input scaling and geometry classification, in the native text format. Alias: `--save-particle`. The calculation then continues.
`--rs`	`SIZE`	Resize file particle to `Dmax = SIZE`. Mutually exclusive with `--k_eq`.
`--k_eq`	`X`	Resize so `k_eq = 2*pi*r_eq/lambda`. Requires wavelength.
`--ri`	`Re Im`	Complex refractive index. Absorption is enabled automatically when `Im != 0`, or explicitly with `--abs`.
`-w`	`LAMBDA`	Wavelength in micrometers.
`-n`	`N`	Maximum internal reflection/refraction depth.

File coordinates and all internal tracing geometry are stored in double precision. The loader translates coordinates relative to the order-independent bounding-box centre and removes only scale-relative binary serialization noise. A global translation changes only a common optical phase; this canonical form preserves the Mueller matrix, small edges, and facet order for files with large absolute coordinates.

Built-in particle types:

Type	Shape	Parameters
1	Hexagonal column/plate	`L D`: axial length and vertex-to-vertex diameter. The same type represents a column or a plate according to L/D.
2	Bullet	`L D`: total axial length and diameter. The pyramidal cap height is derived from the fixed 62° construction angle.
3	Bullet rosette	`L D [CAP]`: six bullets arranged as a rosette. If `CAP` is omitted, the same 62° construction is used.
4	Droxtal	`SCALE`: multiplies the fixed droxtal template. Legacy `L D SCALE` is accepted but `L,D` are ignored.
10	Concave hexagonal	`L D CAVITY_DEG`: column with top and bottom pyramidal cavities. The angle must be positive and less than $\arctan(L/D)$.
12	Two-column hexagonal aggregate	`L D 2`: exactly two equal eight-facet columns in the built-in relative placement. Use a file for a general aggregate.
999	Fixed built-in aggregate	`SCALE`: multiplies the fixed aggregate template used as a reproducible regression geometry.

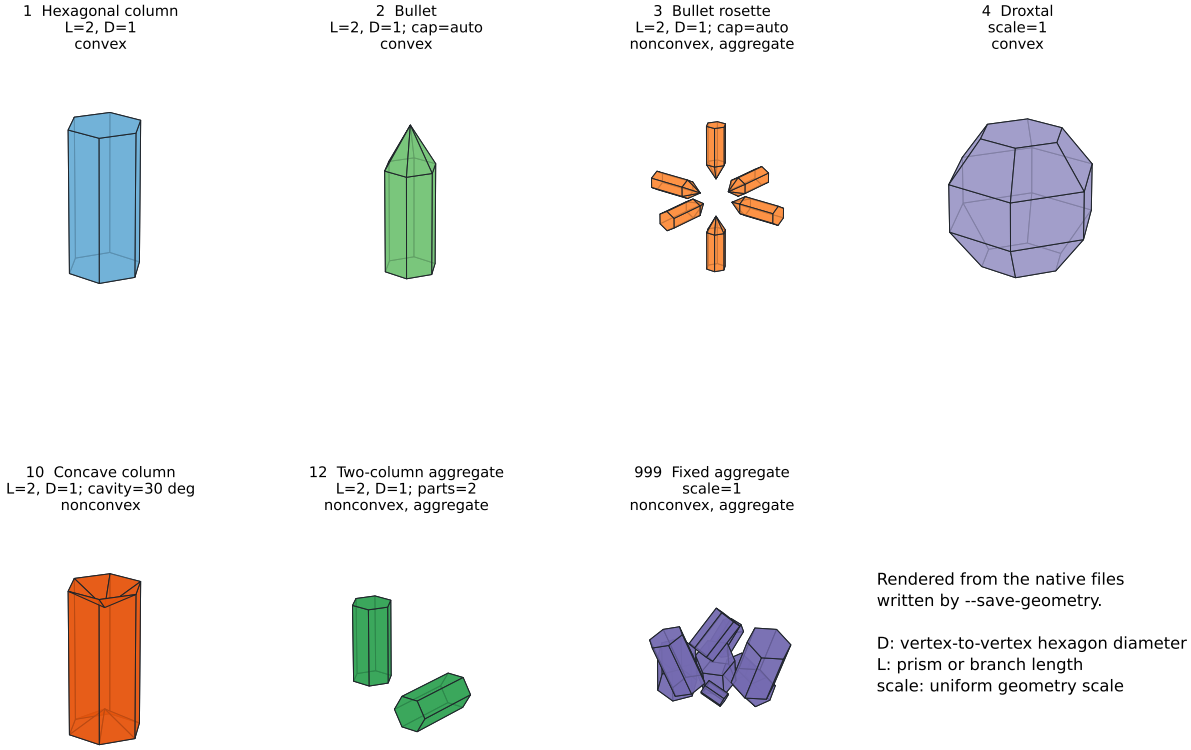


Figure 1: Geometries produced by the current built-in constructors. The images are rendered from the native files in `examples/particles`, not from separate drawing models.

5.1 Native particle file and geometry export

The native format starts with three nonempty header records:

```
CONCAVE
AGGREGATE [FACETS_PER_PART]
BETA_DOMAIN_DEG GAMMA_DOMAIN_DEG
```

```
x0 y0 z0
x1 y1 z1
x2 y2 z2

x0 y0 z0      # next facet
...
```

`CONCAVE` is 0 or 1. `AGGREGATE` is 0 for one object, or `1 FACETS_PER_PART` for equal-size aggregate components. The third record gives the positive beta and gamma fundamental-domain widths. Blank lines separate facets; each facet must have at least three finite, non-collinear vertices. Full-line and inline comments begin with `#`. Each facet must be a simple planar convex polygon. Vertex order defines its normal; every component must be a closed manifold with consistent outward winding. A facet may contain at most 64 vertices and a particle at most 256 facets.

`--save-geometry FILE` writes 17-digit coordinates. Loading validates facet geometry, closed manifold topology, outward winding, and aggregate metadata before tracing. A useful round-trip check is:

```
gpu/bin/mbs_po_gpu_double_fast --po -p 10 20 12 15 \
    --save-geometry concave.particle ...
gpu/bin/mbs_po_gpu_double_fast --po --pf concave.particle ...
```

The export consists of `FILE` and `FILE.visibility`. The sidecar stores the two clipping-visibility flags of every facet and is loaded automatically when it is present. Keep both files together: coordinates alone are insufficient for an exact round trip of concave built-in particles. Geometry is not written automatically; request it explicitly with `--save-geometry FILE` (alias `--save-particle`).

Equivalent-size scaling:

```
r_eq = (3 V / (4*pi))^(1/3)
k_eq = 2*pi*r_eq/lambda
scale = (k_eq_target * lambda / (2*pi)) / r_eq_original
```

6 Orientation grids

Mode	Arguments	Best use	Notes
`--oldauto`	`DIV`	Production regular grid	Grid step follows diffraction-limited angular scale; common values are 2, 4, 8.
`--random`	`Nb Ng`	Manual beta/gamma regular grid	Uses symmetry-reduced beta/gamma domain unless overridden.
`--fixed`	`BETA GAMMA`	Single-orientation debugging	Angles are degrees.
`--orientfile`	`FILE`	Reproducible custom orientations	One beta/gamma pair in degrees per line.
`--sobol`	`N`	Quasi-random orientation average	Good convergence for broad scans.
`--sobol_seed`	`N S`	Seeded Sobol/Owen sequence	Useful for repeatable convergence checks.
`--sobol_ring`	`Nb Ng`	Sobol beta with uniform gamma rings	Hybrid orientation grid.
`--so3_quat`	`N`	Isotropic SO(3) average	Hammersley on the symmetry quotient; laboratory alpha is integrated by scattering phi.
`--so3_full_quat`	`N`	Independent SO(3) audit	Direct full-group Shoemake quaternions; particle symmetry is deliberately ignored.
`--hammersley`	`N`	Low-discrepancy orientations	Debug/experimental.
`--lattice`	`N`	Rank-1 lattice orientations	Debug/experimental.
`--lattice_z`	`N Z`	Rank-1 lattice with explicit generator	Debug/experimental.
`--euler_quad`	`Nb Ng`	Gauss in cos(beta), periodic gamma	High-order quadrature.

Mode	Arguments	Best use	Notes
`--euler_adapt`	`Nb NgMax`	Adaptive gamma count per beta ring	Reduces work near beta poles.
`--adaptive_euler`	`EPS`	Converged regular Euler grid	Refines N_β and N_γ separately, then together.
`--adaptive`	`EPS`	Adaptive Sobol count only	Doubles N; it does not silently alter theta, phi, or reflection depth.
`--auto`	`EPS`	Auto theta, phi, orientation count	Keeps the requested reflection depth fixed.
`--autofull`	`EPS`	Auto n, theta, phi, orientations	Slower, more complete search.
`--oldautofull`	`EPS`	Autofull with converged Euler grid	Independently converges N_β and N_γ.
`--adaptive-config`	`FILE`	Reproducible adaptive settings	Per-parameter minimum, maximum, and tolerance.

Orientation modifiers:

Flag	Arguments	Description
`--ring_points`	`N`	Points per diffraction ring for oldauto estimates; default 3.
`--mirror_gamma`	none	For a verified reflection-symmetric particle, sample half the gamma range and restore the omitted Mueller contribution with Stokes parity. Supported by `--so3_quat`.
`--so3_mirror_audit`	none	With an even `--so3_quat N`, explicitly trace nested reflected pairs for a direct validation of `--mirror_gamma`.
`--sym`	`Sb Sg`	Override symmetry domain: beta range is `pi/Sb`, gamma range is `2*pi/Sg`.
`--b`	`B1 B2`	Manual beta range in degrees for `--random`.
`--g`	`G1 G2`	Manual gamma range in degrees for `--random`.
`--maxorient`	`N`	Maximum orientations for adaptive modes.
`--max_beta_points`	`N`	Hard adaptive N_β limit.
`--max_gamma_points`	`N`	Hard adaptive N_γ limit.
`--chunk`	`N`	Orientation/gamma chunk size.
`--coh_orient`	none	Disabled legacy mode; cross-orientation coherence is undefined without relative phases.
`--pole`	none	Use one gamma value at beta poles. Best with endpoint grids such as `--oldauto`.
`--owen_avg`	`K`	Average K nested Owen final seeds in `--autofull`; default can be controlled by environment.
`--owen_seeds`	`S...`	Explicit Owen seeds for `--autofull` final averaging.

6.1 Symmetry-reduced SO(3) quadrature

For an isotropic ensemble, the Haar measure in the Euler convention used by the program is

$$dR \propto \sin\beta \, d\beta \, d\gamma \, d\alpha.$$

The production mode `--so3-quaternion N` traces only the particle's fundamental domain $0 \le \beta \le \beta_{\text{sym}}, 0 \le \gamma < \gamma_{\text{sym}}$. For point $i = 0, \dots, N-1$,

$$u_i = \frac{i + 1/2}{N}, \qquad v_i = \text{radical_inverse}_2(i),$$

$$\beta_i = \arccos\left[1 - (1 - \cos\beta_{\text{sym}})u_i\right], \qquad \gamma_i = \gamma_{\text{sym}} v_i, \qquad w_i = \frac{1}{N}.$$

Thus the nodes are uniform in $\cos\beta$, not in β, and the normalized weights satisfy $\sum_i w_i = 1$. The option `--sym Sb Sg` overrides the domain with $\beta_{\text{sym}} = \pi/S_b$ and $\gamma_{\text{sym}} = 2\pi/S_g$; use it only for an actual particle symmetry.

For a paired mirror validation, add `--so3-mirror-audit` to an even full count and put $K = N/2$. The audit evaluates the same formulas for $i = 0, \ldots, K-1$ with $u_i = (i+1/2)/K$ and $\gamma_i = (\gamma_{\text{sym}}/2)v_i$, then explicitly traces both (β_i, γ_i) and $(\beta_i, \gamma_{\text{sym}} - \gamma_i)$ with weight $1/N$. This layout nests exactly with a K-point `--mirror-gamma` run. Without the audit modifier the production full-domain Hammersley sequence is unchanged.

With `--mirror-gamma`, the sampled range becomes $0 \le \gamma < \gamma_{\text{sym}}/2$. The omitted half is restored before the α quadrature as

$$M_{\text{full}}(\theta, \phi) = \frac{1}{2}\left[M_{\text{half}}(\theta, \phi) + P M_{\text{half}}(\theta, -\phi) P\right], \qquad P = \text{diag}(1, 1, -1, -1).$$

This is valid only when the complete optical particle, including facet visibility and material assignment, has the asserted reflection plane and the selected PO tracer is numerically invariant under that reflection. The program cannot prove this property from a particle file; validate every new particle class and parameter regime against one full-gamma run. The value N remains the number of actually traced β, γ orientations. For a strict paired check, compare `--so3-quaternion 4096 --so3-mirror-audit` with `--so3-quaternion 2048 --mirror-gamma`. Their base nodes are identical, so the difference measures numerical mirror consistency rather than two-sample Hammersley noise. Also check the ordinary full-domain sequence against an independent dense result and inspect backscatter separately.

The remaining laboratory angle α is not retraced. Rotation about the incident beam is equivalent to changing scattering azimuth ϕ, hence each theta row is accumulated as

$$\overline{M}(\theta) = \frac{1}{N_\phi} \sum_{\phi} M(\theta, \phi) L(-\phi).$$

Here L is the Stokes reference-plane rotation whose Q/U block contains $\cos(2\phi)$ and $\sin(2\phi)$. Multiplication is on the right because the incident polarization basis changes. At $\theta = 0$ and $\theta = \pi$ the azimuthal basis is singular; the implementation averages without L and then applies the exact forward/backward pole form.

This mode requires $N_\phi \ge 2$. A production command should combine it with `--scattering-diffraction-sampling Q` and `--latitude-phi-grid`. The slower `--so3-full-quaternion N` retains direct full-group sampling as an independent audit. Its N counts complete three-dimensional rotations, whereas the production mode's N counts traced beta/gamma orientations and uses the phi grid for the alpha quadrature.

6.2 Parallel tracing of orientation files

`--parallel-trace` enables worker-local CPU PO tracing for `--orientation-file`; `--threads N` selects the worker count. Each worker owns its particle, scattering state and beam buffers. Without the flag, tracing stays serial and diffraction retains its existing parallel path. One worker uses the serial tracing path. Each input row keeps its equal weight; Jones amplitudes are summed inside an orientation before Mueller averaging.

```
cat > orientations.txt <<'EOF'
# beta_deg gamma_deg
0 0
60 0
90 180
120 90
EOF
cpu/bin/mbs_po_mpi --method po --backend cpu \
  --particle 1 10 10 --refractive-index 1.31 0 --wavelength-um 0.532 \
  --orientation-file orientations.txt --parallel-trace --threads 4 \
  --scattering-grid 170 180 4 40 --max-reflections 6 \
  --cutoff-profile off --output results/file_average --close
```

Use one MPI rank. Fixed orientation, GO and CUDA combinations are rejected. Worker-local buffers increase peak RAM. Serial and parallel tracing retain the same checkpoint order and weights and can resume the same checkpoint.

6.3 Reusing exact duplicate orientations

`--deduplicate-orientations` merges only beta/gamma pairs that compare exactly equal after parsing. Nearby angles, asserted symmetries and different gamma values at a pole are not merged. A node occurring c times among N input rows retains Mueller weight c/N. The original quadrature is preserved. Both flags are opt-in, independent, and require single-rank CPU PO file runs. Add another `60 0` row to the preceding file and run:

```
cpu/bin/mbs_po_mpi --method po --backend cpu \
  --particle 1 10 10 --refractive-index 1.31 0 --wavelength-um 0.532 \
  --orientation-file orientations.txt --parallel-trace \
  --deduplicate-orientations --threads 4 \
  --scattering-grid 170 180 4 40 --max-reflections 6 \
  --cutoff-profile off --output results/file_average --close
```

Five rows require four traces with weights $1/5, 2/5, 1/5, 1/5$. The log reports input and unique counts. Checkpoints include multiplicities and weights; resume with the same file and deduplication flag. A different weight distribution does not reuse the checkpoint. Three dust-particle tests of the same 24-row rule gave about five-fold combined acceleration; speed and extra worker RAM depend on the workload.

6.4 Physical analytic control at exact backscatter

`--analytic-backscatter` computes

$$\langle \widehat{M_{11}(180^\circ)} \rangle = \langle C \rangle + \sum_i w_i \, [M_{11}^{\mathrm{MBS}}(i) - C(i)].$$

The return-strip profile C retains entry/exit transmission, two internal reflections in both orders and coherent interference between the two entry faces, including angular Fresnel and total-internal-reflection phases. Right-angle shared edges and opposing parallel faces are detected from the geometry. Rectangular and regular hexagonal prisms have 12 such strips; for the hexagonal base, a rectangular strip approximates the aperture. The finite sinc-squared edge integral and optical Fourier-Legendre/Bessel phase moments are analytic. Smooth physical coefficients require numerical one-dimensional preparation, reused for identical strips. Degree 96/160, then 320 if needed, must give mean refinement within 10^{-6}.

All traced complex MBS beams are summed before forming the full intensity. Longer paths, finite-window corrections and cross-family interference remain in the numerical residual. No probability density is fitted in place of physical scattering.

```
cpu/bin/mbs_po_mpi --method po --backend cpu \
  --particle 1 101.02 101.02 --refractive-index 1.31 0 \
  --wavelength-um 0.532 --max-reflections 20 \
  --sobol-seed 4096 42 --analytic-backscatter --threads 4 \
  --scattering-grid 179 180 4 4 --cutoff-profile off \
  --output results/analytic_backscatter --close
```

`--analytic-return-order K` adds longer image-family self terms with $p + q \le K + 1$: p counts longitudinal round trips and $2q - 1$ counts lateral reflections. $K = 1 \ldots 8$, default 1; reflection depth must be at least $2K + 1$. Each self phase cancels, its edge integral is analytic, and its Fresnel amplitude uses one-dimensional preparation. Cross-family terms remain in the full numerical residual. Append `--analytic-return-order 3`, for example. Orders 3–8 barely changed scatter in the tested 1:1 prism at $n = 1.31$, so order 1 remains the default.

Requires single-rank CPU PO, real nonabsorbing index $n > 1$, coherent beams, a convex particle with suitable edges and an exact 180° row. Supported rules are Sobol, seeded Sobol, Hammersley, lattice and Euler quadrature. Symmetry of C is verified; use `--symmetry 1 1` if rejected. Multi-size, adaptive grid/depth searches and mirror-gamma are unsupported.

Only M_{11} at 180° changes in ordinary `.dat`; other elements and directions retain their ordinary numerical estimates. The same correction applies to no-shadow output. Diagnostic files are:

```
<name>_analytic_backscatter.tsv
<name>_analytic_backscatter_samples.tsv
```

They record raw/hybrid means, known/sampled control means, residual, refinement and per-orientation samples. A poorly sampled estimate can be negative and is not clipped, to avoid bias.

At fixed N the trace count is unchanged. Acceleration requires fewer samples at the same full-mean error and is not guaranteed. Compare independent Owen scrambles. The script `scripts/benchmark_analytic_backscatter.py` compares both estimates on the same orientations.

6.5 Analytic physical components at all scattering angles

`--analytic-facet-average` corrects only M_{11} at every theta row. Reflected facet self terms and projected shadow apertures are averaged; internal paths, clipping and all cross terms remain in the complete coherent numerical MBS residual. At fixed N the trace count is unchanged.

The facet incidence cosine $\mu = \vec{n} \cdot \vec{u}$ differs from scattering angle $\theta = \arccos(-\vec{u} \cdot \vec{v})$, with unit outward normal $\vec{n}$. Source $\vec{u}$ points toward the source; observer $\vec{v}$ points toward the observer. $\theta = 0$ is forward. Fresnel retains its dependence on each μ, including oblique incidence. Simultaneous rigid rotations preserve M_{11}. `Control::Evaluate(u,v)` normalizes directions; `SourceFrame` and `Observer` construct arbitrary incidence axes and azimuth references on CPU/CUDA. Tangency within eight FP64 epsilons uses the same boundary. The CLI samples incidence through particle rotations and needs no extra flag. A full Haar mean is independent of the laboratory illumination axis; aligned ensembles do not have this invariance.

`--haar-alpha` adds a third Owen-Sobol laboratory-alpha coordinate, preserving the old beta/gamma samples. $N_\phi = 1$ is now sufficient for the orientation measure; extra azimuths provide additional averaging. Alternatively use `--so3-full-quaternion N`. Two-angle Sobol without alpha is rejected because it is not full Haar sampling away from poles.

```
cpu/bin/mbs_po_mpi --method po --backend cpu \
  --particle 1 30.3063 30.3063 --refractive-index 1.31 0 \
  --wavelength-um 0.532 --max-reflections 20 \
  --sobol-seed 4096 42 --haar-alpha --analytic-facet-average \
  --threads 4 --scattering-grid 0 180 1 36 \
  --cutoff-profile off --output results/analytic_all_angles --close
```

With body-frame source direction $\vec{u}$ and observer $\vec{v}$:

$$\vec{q}_r = k(\vec{u} + \vec{v}), \quad |\vec{q}_r| = 2k\sin(\theta/2), \qquad \vec{q}_s = k[\vec{v} - (\vec{u} \cdot \vec{v})\vec{u}], \quad |\vec{q}_s| = k\sin\theta.$$

Angular Fresnel is retained. The Legendre addition theorem and Rayleigh expansion analytically integrate spin and oscillatory orientation phases, sharing 1D $R(\mu)$ moments across the grid. Green tabulation and edge quadrature remain numerical. Reflection changes are checked to 10^{-4}; a small shadow change uses the combined-control scale. Up to 320 harmonics and 768 edge nodes are used. Large-particle setup can be substantial and is reported separately.

Congruent facets reuse self-mean boundary integrals; point controls and coherent projected-area means retain all physical normals. Two radial tables allow 64 million FP64 entries each (about1GiB combined), accommodating the891.3um prism on0–25 degree grids.

At 0° reflection vanishes. The coherent projected-area square has a closed spherical mean over pairs of facet normals; it matches forward shadow self intensity for convex particles. Nonconvex differences stay in the residual. Vacuum $n = 1+0i$ receives no correction. Absorption with Re $n \geq 1$ is supported; ideal complex Fresnel in the control can slightly differ from native real refracted-direction coefficients. The residual preserves native physics, including that difference.

`--analytic-shadow-control facets|circular|off` selects the shadow model. Default facets uses projected-facet self terms and coherent area at 0°. Circular uses a circular diffraction aperture with mean-projection radius and the original orientation-dependent area; its approximation is corrected by the residual. Off retains only reflection. No-shadow receives reflection alone.

Files:

```
<name>_analytic_facets.tsv
<name>_analytic_facet_samples.tsv
<name>_analytic_combined.tsv
```

The first records raw/hybrid means, controls, residual and refinement. The second is optional under `--analytic-facet-samples`. The third reports composition with `--analytic-backscatter`, whose return correction is added only at 180°. Individual summaries retain their own raw-MBS estimator.

Requires single-rank coherent CPU/CUDA PO, one size, fixed grids/depth and full Haar sampling. Arbitrary faceted shapes are supported; use `--symmetry 1 1` when control symmetry is not verified. The three-prism 8×512 comparison gave variance ratios about 0.77–1.52; some angles worsened. These are not measured runtime-to-tolerance speedups or a closure of all internal paths.

`--analytic-mean-cache FILE` reuses verified physical means across identical geometry, material, wavelength and grid inputs, with a process lock and atomic publication. Point apertures run on FP64 CUDA when CUDA is selected; the full coherent field retains its optimized GPU path.

The portable `scripts/run_gpu_multilevel.py` runner uses

$$E[M_f] = E[M_c] + E[M_f - M_c]$$

with many coarse samples and fewer coupled correction samples. These are Mueller intensities after full coherent beam addition at each orientation. Eight final scramble estimates include the covariance of their components. Defaults use depth8/cutoff0.001 and depth12/cutoffoff; two successive changes and pointwise confidence intervals must stay below3%, scaling every Mueller element by M_{11}. All raw GPU runs are retained.

```
python3 scripts/run_gpu_multilevel.py \
  --binary gpu/bin/mbs_po_gpu_double --case test2 \
  --output results/test2 --gpus 0 1 2 3 --threads 16 --phi-points 4
```

The presets reproduce446.7/138.9um and891.3/207.8um prisms, index1.3116, wavelength0.532um and267/531rows at0–25 degrees. Physical inputs, theta files and CUDA libraries can be configured; `--dry-run` prints inputs. `status.json` records progress and `mueller_multilevel.dat` the final estimate. Resume requires matching binary and physical inputs; check job PIDs after a controller crash before restarting.

Experimental `--analytic-azimuth-gaussian` adds internal-beam Gaussian aperture controls to `--analytic-facet-average`. Projected area A and actual Jones norm set $P = \|J\|^2 A^2/(2\lambda^2)$ and $\kappa = 2\pi A/\lambda^2$. For outgoing polar angle θ_b,

$$C = Pe^{-\kappa|\vec{d}-\vec{v}|^2/2}, \qquad E_\alpha C = Pe^{-2\kappa \sin^2[(\theta-\theta_b)/2]} I_{0e}(\kappa \sin\theta \sin\theta_b),$$

where $I_{0e}(x) = e^{-x} I_0(x)$; see NIST DLMF 10.32.1. This is the exact conditional mean of a Gaussian surrogate; adding $E_\alpha C - C$ preserves all polygon diffraction and coherent interference in the native residual. An alpha-independent polar exponent window at64 applies to both terms. Vacuum and both poles get zero correction. The `_analytic_azimuth.tsv` file reports values and cost; optional sample diagnostics use `--analytic-facet-samples`. Variance can increase at some angles; compare independent seeds before production use. Body frames are prepared per orientation chunk, avoiding an additional $72N$ bytes, and Haar generation avoids unused $16N$ bytes of 2D samples.

7 Scattering grids

Flag	Arguments	Description
`--grid`	`T1 T2 Nphi Nth`	Uniform theta grid from T1 to T2 degrees. Output has `Nth + 1` theta rows.
`--grid`	`R Nphi Nth`	Backscatter cone grid of radius R degrees.
`--tgrid`	`FILE`	Non-uniform theta grid in degrees, one row per theta value.
`--auto_tgrid`	`EPS`	Adaptive theta grid by bisection of measured full-Mueller interpolation error; no fixed halo angles are used.
`--auto_phi`	none	Compatibility form of measured phi convergence with tolerance 0.02.
`--adaptive_phi`	`EPS`	Converge N_ϕ only.

Flag	Arguments	Description
`--adaptive_reflections`	`EPS`	Converge internal reflection depth n only.
`--nphi`	`N`	Override phi count. Highest priority for phi.
`--diffraction-limit-grid`	`FACTOR`	Derive uniform theta and equatorial-phi steps from the diffraction estimate.
`--latitude-phi-grid`	none	Reduce the phi count in proportion to $\sin\theta$ away from the equator.
`--max_theta_points`	`N`	Hard theta-point limit; default 4097.
`--max_phi_points`	`N`	Hard N_ϕ limit; default 2400.
`--convergence_passes`	`N`	Consecutive passing refinements required; default 2.
`--filter`	`DEG`	Restrict output to a backscattering cone. Legacy/debug use.
`--point`	none	Backscatter point mode. Legacy; avoid for optimized regular-grid production.

7.1 Diffraction-limit and latitude-phi grids

For a PO `--diffraction-grid DIV` run, `--diffraction-limit-grid FACTOR` derives the scattering grid from the current particle maximum dimension $l_{\max}$ and wavelength λ:

$$\xi = \text{FACTOR}\, 0.69\frac{\lambda}{l_{\max}}, \qquad N_\theta = \left\lceil \frac{\pi}{\xi} \right\rceil,$$

$$N_{\phi,\text{eq}} = \text{round_up}_6\left[\max\left(12, \left\lceil \frac{2\pi}{\xi} \right\rceil\right)\right].$$

The output contains $N_\theta + 1$ rows from zero to π. `FACTOR=1` uses the estimate literally; `FACTOR=0.5` approximately halves both angular steps, while a factor above one makes the grid coarser. This is an a-priori resolution estimate, not an a-posteriori accuracy guarantee. Validate a production factor against a finer value for every required Mueller element.

With `--latitude-phi-grid`, each theta row uses

$$N_\phi(\theta) = \min\left\{N_{\phi,\text{eq}}, \text{round_up}_6\left[\max\left(12, \left\lceil \frac{2\pi\sin\theta}{\xi} \right\rceil\right)\right]\right\}.$$

Equatorial spacing is unchanged while redundant azimuth samples are removed near the poles. Counts are rounded to a multiple of six, and a pole shares its neighboring work group for stable basis handling. Accumulation still uses the full rectangular $N_{\phi,\text{eq}}$ output layout, so the file format does not change.

The variable latitude grid supports both `--method po --diffraction-grid DIV` and the symmetry-reduced `--so3-quaternion N` path, with one particle size per process. For SO(3), prefer `--scattering-diffraction-sampling Q`; the unified `--diffraction-sampling Q` is itself a primary regular orientation rule. The diffraction-limit option conflicts with explicit `--nphi`; the latitude grid is not supported by a shared serial multi-size trace. Run each size in its own process so $l_{\max}$ and the grid are recomputed.

```
CUDA_VISIBLE_DEVICES=0,1,2,3 \
MBS_GPU_GROUPS=1 MBS_GPU_MULTI_MAX=4 \
gpu/bin/mbs_po_gpu_double ... --diffraction-limit-grid 0.5 --latitude-phi-grid
```

Selection rules:

Quantity	Rule
Theta grid	Exactly one of `--tgrid`, `--grid`, or `--auto_tgrid`; unified auto modes treat an explicit grid as fixed.
Phi grid	Standalone adaptive phi selection and explicit `--nphi` are mutually exclusive. Unified auto modes treat explicit `--nphi` as fixed and tune the remaining dimensions.

7.2 Unified convergence criterion

For two approximations A and B, phi, reflection, and Euler candidate comparisons use the row error

$$e_{\text{row}} = \max\left(\frac{|M_{11}^A - M_{11}^B|}{\max(|M_{11}^A|, |M_{11}^B|, \epsilon_0)}, \max_{(i,j)\neq(1,1)} \frac{|R_{ij}^A - R_{ij}^B|}{\max(1, |R_{ij}^A|, |R_{ij}^B|)} \right), \qquad R_{ij} = \frac{M_{ij}}{M_{11}}.$$

Here M_{ij} is a Mueller element, R_{ij} is its normalized value, and ϵ_0 protects a vanishing M_{11}. The maximum over theta rows is combined with the relative change of $\int M_{11}\, d\Omega$. Reflection-depth tests also include outgoing energy. Theta convergence is different: it evaluates the actual Mueller row at one-third and two-thirds of every interval against interpolation and checks the same integrated M_{11}. Sobol orientation convergence checks incoming energy and all 16 Mueller elements on control-theta rows selected from the actual scattering grid.

The parameters are not strictly independent. Reflection depth changes the beam tree; phi changes the azimuth average used to expose theta structure; and orientation sampling changes every averaged row. Therefore the joint order is

$$n \longrightarrow N_\phi \longrightarrow \{\theta_j\} \longrightarrow N_{\text{orient}}.$$

The `--auto` modes repeat the complete sequence on a common larger pilot set until the pilot implied by the selected orientation count and all selected values form a coupled fixed point. Regular Euler convergence alternates N_β and N_γ, then doubles both together. Reaching any hard limit in phi, reflection, theta, Euler, or a unified mode is reported as an error rather than accepted as convergence. Standalone `--adaptive-orientations` is exploratory: at its orientation cap it warns and writes the best result; unified modes use strict orientation convergence. The configured passing streak applies to phi, reflection, Euler, and orientation searches, while theta uses interval refinement directly. Every trial is written to `<output>/<name>_convergence.tsv`.

7.3 Adaptive configuration file

Use `--adaptive-config FILE` to keep production convergence settings outside a long command line. The documented template is `configs/adaptive.example.conf`. It uses strict `key = value` assignments and accepts inline comments after `#` or `;`.

The file defines separate minimum, maximum, and relative tolerance values for reflection depth, laboratory alpha (internally N_ϕ), theta points, Sobol orientations, beta points, and gamma points. It also defines the number of consecutive passing refinements and the pilot and sweep limits of the coupled controller. A tolerance of `0.01` means one percent.

```
mbs_po --autofull 0.02 --adaptive-config configs/adaptive.example.conf ...
```

Per-parameter tolerances in the file replace the mode-wide `EPS`; a missing tolerance inherits `EPS`. Explicit command-line `--max-*`, `--max-reflections`, and `--convergence-passes` values override the file. Unknown keys, duplicates, invalid ranges, non-power-of-two Sobol limits, and malformed lines are rejected before the calculation, with the file line and a corrective hint.

7.4 Why column symmetry does not divide Nphi

The code uses the Euler convention

$$\mathbf{R} = R_z(\alpha) R_y(\beta) R_z(\gamma).$$

The scattering-azimuth loop is the rotationally covariant implementation of the laboratory-angle α average, so $N_\phi = N_\alpha$ in this context. A hexagonal column has the body-axis symmetry $R_z(2\pi/6)$; it reduces the γ domain to $0 \le \gamma < \pi/3$. For $\beta \neq 0, \pi$, it does not make the tilted particle invariant under a laboratory $R_z(2\pi/6)$ rotation, hence $0 \le \alpha < 2\pi$ is still required. An automatic division of N_ϕ by six would therefore be incorrect. The aliases `--alpha-points` and `--adaptive-alpha` only clarify the meaning of the existing phi controls; they do not enable an approximation.

For full angular integrals use `--grid 0 180 Nphi Nth`. Endpoint rows are physical half-cells; they must not have zero weight.

8 Beam and trace cutoffs

Cutoffs act at two different stages. Output-beam cutoffs discard a completed ray branch before PO diffraction. Trace cutoffs stop an internal branch while the reflection/refraction tree is being built. With reference values taken from the current orientation, the three dimensionless tests are

$$j_b = \frac{\|J_b\|_F^2}{J_{\text{ref}}^2}, \qquad a_b = \frac{A_b}{A_{\text{ref}}}, \qquad i_b = j_b a_b.$$

Here J_b is the accumulated Jones matrix of branch b, A_b is its polygon area, and i_b is a simple intensity-area importance estimate. When several tests are enabled, rejection uses logical *OR*: satisfying any one smallness test removes the branch. Reason counters can therefore overlap.

8.1 Coherent presets

`--cutoff-profile MODE` configures all relative thresholds and the small-fragment ratio together. It cannot be combined with an individual cutoff or `--beam-area-ratio`.

Profile	Output i_b	Trace i_b	Area ratio	Intended use
`off`	0	0	disabled	Reference and convergence runs; no configurable cutoff approximation.
`safe`	10^{-10}	10^{-12}	10^8	First production candidate after comparison with `off`.
`balanced`	10^{-8}	10^{-10}	10^5	Faster scans after particle-class calibration.
`fast`	10^{-6}	10^{-8}	10^3	Exploratory scans; not a validation setting.
legacy default	0	$j_b = 10^{-7}$	100	Scale-invariant replacement of the historical weak-branch test when no profile or individual cutoff is supplied.

The named `safe`, `balanced`, and `fast` presets enable the combined importance criterion, not separate Jones and area OR thresholds. This avoids removing a large but weak branch or a small but intense branch solely because one factor is small. The legacy default additionally terminates a branch when its Jones norm is below 10^{-7} of the strongest incident branch; this replaces the former area-dependent threshold. Its area-ratio simplification remains at 100; use `--cutoff-profile off` when a genuinely uncut reference is required. The profiles do not set `--trace-max-beams`. For unattended runs on deeply concave particles, use a finite beam limit as a diagnostic guard: strict profiles can still produce a very large tree for an isolated orientation. A nonzero "Configured beam-limit hits" counter means that the result is incomplete; increase the limit or calibrate stronger cutoffs before using that run as physical data.

8.2 Individual controls

Flag	Range	Exact action
`--beam-cutoff EPS`	$[0, 1]$	Legacy shortcut setting both output Jones and output area thresholds; a beam is rejected if either test passes.
`--beam-cutoff-jones EPS`	$[0, 1]$	Output test $j_b <$ EPS.
`--beam-cutoff-area EPS`	$[0, 1]$	Output test $a_b <$ EPS.
`--beam-cutoff-importance EPS`	$[0, 1]$	Output test $i_b <$ EPS.
`--trace-cutoff EPS`	$[0, 1]$	Legacy shortcut setting both internal Jones and area thresholds; pruning uses OR.
`--trace-cutoff-jones EPS`	$[0, 1]$	Internal test $j_b <$ EPS.
`--trace-cutoff-area EPS`	$[0, 1]$	Internal test $a_b <$ EPS.
`--trace-cutoff-importance EPS`	$[0, 1]$	Internal test $i_b <$ EPS.

Flag	Range	Exact action
`--beam-area-ratio R`	$R \geq 1$	After a nonconvex split, replace two fragments by the larger one only when their area ratio is at least R.
`--trace-max-beams N`	$N \geq 0$	Hard per-orientation beam-tree cap; 0 disables the configured cap. Reaching it aborts the calculation so an incomplete orientation cannot enter the average.

If a legacy common shortcut and a corresponding specific Jones/area option are supplied together, the specific value overrides that side and the program prints a warning. A profile instead rejects such mixing as an input error, so a command cannot silently become a partly modified preset.

Every completed run appends `OUTPUT BEAM CUTOFF REPORT` and `TRACE CUTOFF REPORT` blocks to the log. They contain the selected profile, effective thresholds, candidate/kept/rejected counts, overlapping reason counts, fragment simplifications, configured-cap hits, and hard internal tree-limit hits. Calibrate a profile by running the same geometry, orientation set, n, theta grid, and N_ϕ with `off` and with the candidate profile; compare all 16 M_{ij}/M_{11}, not only runtime or the rejected-beam percentage.

9 GPU and multi-GPU

9.1 CUDA backend

Flag	Description
`--gpu`	Use CUDA diffraction backend. Optional in `gpu/` binaries because they default to GPU.
`--cpu`	Force CPU backend from a GPU-capable binary.
`--fft`	Use cuFFT angular phi interpolation backend. Requires GPU. The direct-phi compression factor is selected automatically.
`--fft-factor N`	Enable FFT interpolation with an explicit compression factor $1 \leq N \leq 64$. $N = 1$ keeps the direct phi grid and is useful as a same-backend reference.
`--fft-tolerance EPS`	Enable a nested-grid error estimate and one automatic refinement when the estimate exceeds $0 <$ EPS < 1.
`--threads N`	OpenMP host worker threads. Also controls tracing-side parallelism before GPU diffraction.

9.2 FFT phi compression and error control

Let N_ϕ be the requested output azimuth count and f the compression factor. The first CUDA pass evaluates approximately

$$N_{\phi,\text{direct}} = \max\left(16, \left\lfloor \frac{N_\phi}{f} \right\rfloor\right)$$

direct samples, then uses periodic Fourier zero-padding to reconstruct the N_ϕ output grid. For $f = 1$, $N_\phi < 32$, or a factor that cannot reduce the grid, the implementation uses the direct path. The speed gain is therefore workload dependent and is bounded by the fraction of runtime spent in phi-direction diffraction; tracing itself is not reduced.

`--fft` asks the implementation to select f. `--fft-factor N` makes the requested compression explicit and has priority over `MBS_FFT_PHI_FACTOR`. Large factors are not an accuracy promise: sharp azimuthal structure has high Fourier modes and can be smoothed or aliased.

With `--fft-tolerance EPS`, the code also evaluates a nested grid with

$$N_{\phi,2} = \min(N_\phi, 2N_{\phi,\text{direct}}).$$

It compares significant M_{11} samples and all 16 Mueller elements using an M_{11}-based scale. The reported estimate is

$$\hat{e} = \max\left(\max_{M_{11}\ \text{significant}} \frac{|M_{11}^{(1)} - M_{11}^{(2)}|}{|M_{11}^{(2)}|}, \max_{i,j} \frac{|M_{ij}^{(1)} - M_{ij}^{(2)}|}{\max(|M_{11}^{(2)}|, 10^{-3} M_{11,\max}^{(2)})} \right).$$

If $\hat{e} >$ EPS, the result reconstructed from the doubled direct grid is retained. This is a one-step a-posteriori estimator, not a rigorous bound and not an iterative convergence proof. It costs an additional diffraction pass and temporarily holds coarse, refined, and output arrays. For a final reference, omit all FFT flags or use `--fft-factor 1`; for production, first calibrate f and EPS on representative sizes and particle shapes.

```
# Explicit 4x compression, refine once when the estimate exceeds 1 percent
gpu/bin/mbs_po_gpu_float_fast ... --fft-factor 4 --fft-tolerance 0.01
```

The final `FFT INTERPOLATION REPORT` records the requested and effective factor, direct and output N_ϕ, number of FFT-path and validation calls, number of refined calls, and the worst nested-grid estimate. Factor 1 is labelled as direct/no interpolation. The fused multi- `k_eq` FFT path does not perform this validation; when tolerance or the diagnostic check is requested, the dispatcher uses a supported fallback instead of silently skipping the check.

GPU runtime errors are fatal in the split GPU build. For debugging only:

For regular polygon phases, the CPU PO loop evaluates four adjacent theta directions together with AVX2. The edge accumulation order is retained in every vector lane. A small phase or an active near-singular denominator selects the original stable scalar formula for that group. This selection is automatic, has no command-line tolerance, and is enabled in the standard CPU build. The temporary phase and sine/cosine arrays use a vertex-major, theta-contiguous layout. Consequently, each AVX2 edge update loads four adjacent theta values directly instead of gathering them from four rows. In the representative absorbing concave benchmark this layout changed the median time from 12.76 s to 11.37 s (1.12x) relative to the preceding vectorized implementation, while the written Mueller table remained bit-identical.

```
MBS_GPU_ALLOW_FALLBACK=1 gpu/bin/mbs_po_gpu_float_fast ...
```

9.3 Why the GPU version is faster

The expensive PO part is the repeated evaluation of the same beam aperture integral for many detector directions and many orientations. The CPU traces rays and prepares compact beam records; the GPU then evaluates diffraction and, in the fast paths, Mueller accumulation on a large regular grid.

Work item	CPU path	GPU path	Parallel granularity
Ray tracing through facets	OpenMP over orientations/gamma blocks	Automatic CUDA ordering and conservative candidate filtering; exact intersections and beam splitting remain CPU-side	Orientation/chunk level
Beam packing	CPU host code	CPU prepares `GpuBeam`/packed beam buffers and copies to device	Beam records
Edge diffraction	Scalar/vector CPU loops	CUDA kernels in `GpuDiffraction.cu`	Beam x theta x phi x orientation
Jones coherent sum	CPU arrays of complex 2x2 matrices	Atomic or no-atomic device kernels	Grid cell and orientation
Jones to Mueller	CPU after Jones sum	Separate `mueller_batch_kernel` or fused in diffraction kernel	Grid cell
Multi-`k_eq` scans	Repeat diffraction per size	Optional fused multi-`k_eq` CUDA pass	Size x beam x grid
FFT phi interpolation	CPU direct phi grid unless disabled	cuFFT low-phi pass plus zero-padding reconstruction	Theta/orientation batches

The main speedup comes from exposing a very large product of independent operations:

```
Nwork ~= Norient * Nbeams_per_orientation * Ntheta * Nphi
```

Each beam/direction contribution is mostly independent until the coherent Jones sum. That makes the diffraction stage a good CUDA workload: many threads do the same edge-integral arithmetic over different `(orientation, beam, theta, phi)` combinations.

9.4 Atomic and no-atomic GPU accumulation

There are two families of CUDA accumulation paths in `src/cuda/GpuDiffraction.cu`.

Mode	Main kernels	How accumulation works	When useful
Atomic Jones accumulation	diffraction_kernel	Each thread computes one beam/grid contribution and uses `atomicAdd` into the complex Jones buffer. Afterwards mueller_batch_kernel converts the summed Jones matrix to Mueller.	General fallback, supports more combinations such as no-shadow output.
No-atomic grid kernels	diffraction_grid_kernel	Work is reorganized so a thread owns a grid/output slot and loops over beams, avoiding multiple writers to the same Jones cell.	Full-only output when memory/layout allows it.
Fused Mueller kernels	diffraction_grid_mueller _kernel, diffraction_grid _mueller_full_kernel, *_full8_kernel, *_mixed8_kernel	The kernel computes coherent Jones locally for an output slot and immediately converts/adds Mueller, avoiding large intermediate Jones buffers.	Fast production path for full-only GPU runs.
Staged orientation Mueller	diffraction_grid_mueller _orient_kernel + reduce _mueller_orient_kernel	First writes per-orientation Mueller, then reduces orientations.	Reduces contention and gives a deterministic reduction shape for large orientation batches.
Multi-k_eq fused	diffraction_grid_mueller _multik_kernel	Computes several nearby equivalent sizes from one packed beam batch.	Shared-batch `--multikeq` scans.

In the atomic path the atomics are on the real and imaginary components of the 2x2 Jones matrix:

```
J00.re, J00.im, J01.re, J01.im,
J10.re, J10.im, J11.re, J11.im
```

For `_noshadow` output the same set of atomics is also applied to the no-shadow Jones buffer. This is correct for coherent PO because beams must be summed as Jones amplitudes before conversion to Mueller. The cost is contention when many beams hit the same detector cell.

The no-atomic/fused paths avoid that contention by changing ownership: one CUDA thread or thread group owns an output grid element and accumulates the beams for that element in registers/local variables. This is often faster for full Mueller output because it reduces global-memory atomics and may skip the large intermediate Jones buffer. The tradeoff is that these paths are more specialized and may be disabled for diagnostic modes that require extra outputs.

Useful controls:

Environment variable	Effect
`MBS_GPU_NO_ATOMICS=1`	Force no-atomic path when supported.
`MBS_GPU_NO_ATOMICS=0`	Force atomic path for comparison/debugging.
`MBS_GPU_FUSED_MUELLER=1`	Prefer fused diffraction-to-Mueller kernels when no-atomic mode is active.
`MBS_GPU_STAGE_MUELLER=1`	Use staged per-orientation Mueller plus reduction where supported.
`MBS_GPU_NO_VERTEX_CACHE=1`	Disable cached/packed vertex path for debugging.
`MBS_GPU_COMPACT_BEAMS=0`	Disable compact packing for beams with at most 8 vertices and use the general layout for diagnostics.
MBS_GPU_COMPACT_BEAM4_SP LIT=0	Disable separate four-vertex records for triangles/quadrilaterals and use the previous eight-vertex compact layout.
`MBS_GPU_WARP_BEAMS=0/1`	Override automatic reduction: one thread per output (0) or one warp per output (1); incoherent automatic mode also accounts for grid size and beams per orientation.

Environment variable	Effect
`MBS_GPU_WARP_GRID_3D=0`	Disable the 3D-grid specialization when warp reduction is active.
`MBS_GPU_THREAD_GRID_3D=0/1`	Override the tiled 3D-grid layout for the consumer thread path. Automatic mode uses it with a 64-thread block when edge padding is at most 15%.
`MBS_GPU_TIMING=1`	Print GPU timing breakdown for count/pack/copy/kernels/d2h/add.
`MBS_GPU_BLOCK=N`	Override CUDA block size for kernel tuning.

For coherent runs CUDA uses its reported FP32:FP64 throughput ratio. A ratio of 16 or greater selects one thread per output; lower ratios retain warp reduction. For incoherent runs one warp per output is selected when there are at least 32 beams per orientation and no more than 200,000 orientation-grid output cells. Other incoherent workloads use one thread per output. The common scalar beam phase is omitted exactly using $\mathrm{Mueller}(cJ) = |c|^2\,\mathrm{Mueller}(J)$; only the local aperture phase is evaluated in the selected GPU storage precision. Coherent Jones summation retains precise phase evaluation. With the default 64-thread block the thread path also uses a $16\,\theta \times 4\,\phi$ tiled grid when incomplete edge tiles add no more than 15% work. This removed two integer divisions per output thread and changed wall time by 0–11% in validation. `MBS_GPU_TIMING=1` reports `reduction=thread|warp` and `layout=3d|flat`.

For the compact thread path, automatic packing separates polygons with at most four vertices from polygons with five to eight vertices. Larger polygons remain in the general 32-vertex layout; one fused kernel consumes all three layouts. Triangles and quadrilaterals use compile-time loop lengths when every compact polygon has at least three vertices. Packing uses one stable bucket pass instead of scanning the beam list once per vertex count. This is automatic in GPU builds.

On the RTX 3080 Ti concave absorbing probe this reduced summed FP32 CUDA-kernel time by about 4% and complete GPU diffraction time by about 3%. For an aggregate containing 3–10-vertex output polygons, FP32 kernel and complete GPU diffraction time fell by 13% and 14%; the corresponding FP64 reductions were 4% and 6%. End-to-end gains are smaller when unchanged CPU tracing dominates. The release gate compares all-compact and mixed paths with `MBS_GPU_COMPACT_BEAM4_SPLIT=0` in both precision profiles.

9.5 Automatic CUDA tracing profile

The CUDA PO backend automatically enables batched facet ordering and conservative projected candidate filtering. The same mode can be requested explicitly with --gpu-trace-prefilter; use --no-gpu-trace-prefilter for an A/B reference. This is not an approximate beam tracer: exact intersection polygons, topology decisions, Fresnel splitting, and child-beam construction remain on the CPU.

The validated automatic profile uses exact CUDA topological ordering, an ordering cache, conservative skip flags for 25–256 candidates, cached facet geometry, 64 threads for the large-list kernel, and one nonblocking CUDA stream per OpenMP worker. The per-worker batch is $\max(64, \lceil 512/N_{\text{workers}} \rceil)$, which avoids the CUDA-stack exhaustion observed with oversized fixed batches. If this initial batch still exhausts kernel-stack backing, the code recursively splits it and remembers the reduced process-wide limit for all later batches and orientations. When trace-limit retries are enabled, worker copies also share the largest successful retry beam limit. Later orientations skip the known-insufficient first pass, but retry levels are still counted from the original configured limit, so the retry ceiling is unchanged. On a 32-orientation nonconvex test, this changed 11.12 s to 8.00 s and reduced full retries from 30 to 7. Nonblocking per-worker streams changed a 256-orientation run from 61.39 s to 42.26 s. Output tables and integral files were byte-identical in both A/B checks. Independent processes on the same physical GPU serialize only the heavy trace batch through a lock keyed by the PCI address. OpenMP workers within one process retain independent streams and overlap. This default prevents combined CUDA kernel-stack reservations from exhausting device memory and does not serialize diffraction kernels. On a deeply nonconvex production orientation this reduced wall time from 7.93 s to 0.98 s (8.09 times); on a smaller representative case the gain was about 1.08 times. The benefit therefore depends strongly on trace complexity.

Expert controls are provided for reproducible profiling; their defaults form the automatic profile:

Variable	Default	Meaning
MBS_GPU_TRACE_OPENMP	1	Allow CUDA tracing from OpenMP workers.
MBS_GPU_TRACE_BATCH_BEAMS	automatic	Override the initial per-worker batch; after OOM the process lowers and remembers the limit.
MBS_GPU_TRACE_INFLIGHT_BEAMS	512	Limit the combined number of trace beams submitted by all OpenMP workers; reduced after OOM.
MBS_GPU_TRACE_FULL_SORT	1	Exact CUDA topological ordering.
MBS_GPU_TRACE_SORT_CACHE	1	Reuse exact ordering for identical keys.
MBS_GPU_TRACE_LARGE_SKIP_FLAGS	1	Conservative projected skip flags.
MBS_GPU_TRACE_LARGE_THREADS	64	Large-list block size (64, 128, or 256).
MBS_GPU_TRACE_CACHE_FACETS	1	Retain packed facet geometry per worker.
MBS_GPU_TRACE_MIN_CANDIDATES	1024	Minimum batch candidate count sent to CUDA.
MBS_GPU_TRACE_NONBLOCKING_STRE AM	1	Per-worker nonblocking streams; set 0 only for serialization diagnostics.
MBS_GPU_TRACE_PROCESS_LOCK	1	Serialize heavy trace batches across independent processes on one physical GPU.
MBS_GPU_TRACE_PREFILTER_FIRST	0	Diagnostic projected filtering before sorting.
MBS_GPU_TRACE_MARGIN	automatic	Override the conservative projection margin.
MBS_GPU_TRACE_TIMING	0	Print transfer and kernel timings.
MBS_GPU_TRACE_VERIFY_SORT	0	Compare CUDA ordering and skip flags with CPU.

The verification mode reported zero ordering and skip-flag mismatches in the production regression. Because a different but equivalent facet traversal can change floating-point summation order, validate sensitive runs against --no-gpu-trace-prefilter; the release gate performs this A/B check.

For a variable latitude-phi grid, `MBS_GPU_GROUPS=1` enables a dedicated exact scheduler. Independent theta-row work groups are assigned dynamically to visible GPUs. Orientation tracing and prepared beams remain shared in host memory, while each device owns one CUDA workspace. Packed beams, weights, and offsets are uploaded once per orientation chunk per device and reused for subsequent theta groups handled by that worker.

Use CUDA_VISIBLE_DEVICES to select devices. Use MBS_GPU_MULTI=N or MBS_GPU_MULTI_MAX=N to limit the number of workers; MBS_GPU_MULTI=0 leaves one GPU. The scheduler requires direct CUDA diffraction; FFT interpolation and theta-zone beam filtering retain the existing path. Speedup need not be linear because CPU tracing, packing, PCIe transfers, final reduction, and theta-group imbalance remain in wall time.

9.6 Multi-size scans

Flag	Arguments	Description
`--multigrid`	`Dmin Dmax N`	Log-spaced scan in absolute maximum particle dimension; each value uses $x = \pi D_{\max}/\lambda$, independent of the source size.
`--multikeq`	`Kmin Kmax N`	Log-spaced scan in equivalent size parameter.
`--multikeq_list`	`FILE`	Exact list of `k_eq` values, one per line.
`--multigrid_parallel`	`N`	Run scan points as child processes; `0` means auto.
`--multigrid_threads`	`N`	OpenMP threads per child process.
`--gpu_devices`	`LIST`	Comma-separated CUDA device list, for example `0,1,2,3,4`.
--multikeq_shared_batches	none	Batch nearby `k_eq` values per GPU child and reuse tracing from the largest value in the batch.
`--multikeq_batch_ratio`	`R`	Maximum `kmax/kmin` inside one shared batch; default `1.05`.

Exact multi-GPU scan, one process per active GPU slot:

```
gpu/bin/mbs_po_gpu_float_fast --po --pf particle.dat \
    --multikeq_list keq.txt --ri 1.6 0.002 -w 1.064 -n 12 \
    --oldauto 2 --grid 0 180 600 180 --fft --close \
    --multigrid_parallel 0 --multigrid_threads 16 --gpu_devices 0,1,2,3,4 \
    -o scan_exact
```

Shared-batch scan:

```
gpu/bin/mbs_po_gpu_float_fast --po --pf particle.dat \
    --multikeq_list keq.txt --ri 1.6 0.002 -w 1.064 -n 12 \
    --oldauto 2 --grid 0 180 600 180 --fft --close \
    --multigrid_parallel 0 --multigrid_threads 16 --gpu_devices 0,1,2,3,4 \
    --multikeq_shared_batches --multikeq_batch_ratio 1.05 \
    -o scan_shared
```

Supported direct coherent FP64 scans of 2–32 sizes select fused multi-size GPU diffraction with a direction-independent phase cache. Float remains opt-in. MBS_GPU_MULTI_K_FULL=0 selects the per-size reference path; MBS_GPU_MULTI_K_PHASE_CACHE=0 disables only the phase cache.

Use tighter `--multikeq_batch_ratio` for accuracy; use exact mode when each size must have its own oldauto reference grid.

10 All flags

10.1 Method, particle, and physical parameters

Flag	Arguments	Description
`--po`	none	Physical Optics mode.
`--go`	none	Geometrical Optics mode.
`-p`	`TYPE L D [extra]`	Built-in particle.
`--pf`	`FILE`	Particle from file.
`--save-geometry`	`FILE`	Save the effective native particle and continue; alias `--save-particle`.
`--rs`	`SIZE`	Resize file particle by Dmax.
`--k_eq`	`X`	Resize by equivalent size parameter.
`--ri`	`Re Im`	Refractive index.
`-w`	`LAMBDA`	Wavelength in micrometers.
`-n`	`N`	Maximum internal reflections/refractions.
`--abs`	none	Enable absorption accounting. Also enabled automatically for nonzero `Im(ri)`.
`--abs_points`	`N` or `all`	Absorption sampling: center point or all polygon vertices.

10.2 Orientation flags

Flag	Arguments	Description
`--fixed`	`BETA GAMMA`	Single orientation in degrees.
`--random`	`Nb Ng`	Regular beta/gamma grid.
`--sobol`	`N`	Sobol orientations.
`--so3_quat`	`N`	Symmetry-reduced SO(3); alpha is integrated by scattering phi.
`--so3_full_quat`	`N`	Direct full-SO(3) quaternion audit.
`--sobol_seed`	`N S`	Sobol with explicit Owen seed.
`--sobol_ring`	`Nb Ng`	Sobol beta with gamma rings.
`--hammersley`	`N`	Hammersley orientation set.
`--lattice`	`N`	Rank-1 lattice orientation set.
`--lattice_z`	`N Z`	Rank-1 lattice with explicit generator.
`--euler_quad`	`Nb Ng`	Gauss beta x periodic gamma quadrature.
`--euler_adapt`	`Nb NgMax`	Gauss beta with adaptive gamma count.

Flag	Arguments	Description
`--adaptive_euler`	`EPS`	Independently converge N_β and N_γ, then verify them jointly.
`--montecarlo`	`N`	Pseudo-random Monte Carlo orientations.
`--adaptive`	`EPS`	Adaptive Sobol orientation count only.
`--auto`	`EPS`	Auto theta, phi, and orientation count.
`--autofull`	`EPS`	Auto n, theta, phi, and orientations.
`--oldautofull`	`EPS`	Autofull search with a converged regular Euler final grid.
`--adaptive-config`	`FILE`	Load per-parameter adaptive ranges and tolerances.
`--owen_avg`	`K`	Average final Owen seeds.
`--owen_seeds`	`S...`	Explicit final Owen seeds.
`--oldauto`	`DIV`	Physics-based regular grid.
`--ring_points`	`N`	Points per diffraction ring estimate.
`--mirror_gamma`	none	Use mirrored half gamma domain.
`--orientfile`	`FILE`	Load beta/gamma orientations in degrees from file.
`--b`	`B1 B2`	Beta range for `--random`.
`--g`	`G1 G2`	Gamma range for `--random`.
`--maxorient`	`N`	Maximum adaptive orientation count.
`--max_beta_points`	`N`	Maximum adaptive N_β.
`--max_gamma_points`	`N`	Maximum adaptive N_γ.
`--chunk`	`N`	Chunk size for orientation/gamma processing.
`--coh_orient`	none	Disabled legacy mode; do not use.
`--pole`	none	Exact beta-pole gamma shortcut.
`--sym`	`Sb Sg`	Override particle symmetry.

10.3 Scattering grid and acceleration flags

Flag	Arguments	Description
`--grid`	`T1 T2 Nphi Nth`	Uniform theta range.
`--grid`	`R Nphi Nth`	Backscatter cone.
`--tgrid`	`FILE`	Non-uniform theta grid.
`--auto_tgrid`	`EPS`	Adaptive theta grid.
`--auto_phi`	none	Measured phi convergence at tolerance 0.02.
`--adaptive_phi`	`EPS`	Converge N_ϕ only.
`--adaptive_reflections`	`EPS`	Converge n only.
`--nphi`	`N`	Override phi count.
`--diffraction-limit-grid`	`FACTOR`	Set theta and equatorial-phi steps to FACTOR $0.69\lambda/l_{\max}$.
`--latitude-phi-grid`	none	Use a row-dependent phi count proportional to $\sin\theta$.
`--max_theta_points`	`N`	Adaptive theta limit.
`--max_phi_points`	`N`	Adaptive phi limit.
`--convergence_passes`	`N`	Required passing streak.
`--threads`	`N`	OpenMP worker threads.
`--gpu`	none	CUDA backend.
`--cpu`	none	Force CPU backend in GPU build.
`--fft`	none	cuFFT phi interpolation with automatic compression.
`--fft-factor`	`N`	Explicit direct/output phi compression, $1 \dots 64$; also enables FFT.
`--fft-tolerance`	`EPS`	Nested-grid estimate in $0 <$ EPS < 1 with one doubled-direct-grid refinement.
`--cutoff-profile`	`MODE`	Complete preset: `off`, `safe`, `balanced`, or `fast`.
`--beam-cutoff`	`EPS`	Legacy output shortcut; reject when relative Jones OR area is below EPS.
`--beam-cutoff-jones`	`EPS`	Output cutoff by relative squared Jones magnitude.
`--beam-cutoff-area`	`EPS`	Output cutoff by relative beam area.
`--beam-cutoff-importance`	`EPS`	Output cutoff by relative Jones intensity times area.

Flag	Arguments	Description
`--trace-cutoff`	`EPS`	Legacy internal shortcut; prune when relative Jones OR area is below EPS.
`--trace-cutoff-jones`	`EPS`	Prune trace tree by relative squared Jones magnitude.
`--trace-cutoff-area`	`EPS`	Prune trace tree by relative area.
`--trace-cutoff-importance`	`EPS`	Prune trace tree by relative Jones intensity times area.
`--trace-max-beams`	`N`	Hard per-orientation beam-tree cap; `0` disables it and reaching it aborts the calculation.
--gpu-trace-prefilter	none	Explicitly enable the automatic batched CUDA ordering and candidate-filtering profile.
--no-gpu-trace-prefilter	none	Disable automatic CUDA tracing for a reference comparison.
`--trace_prefilter`	none	Enable CPU projected-AABB prefilter.
`--no_trace_prefilter`	none	Disable CPU projected-AABB prefilter.
--trace_prefilter_margin	`M`	AABB prefilter margin.
`--trace_prefilter_stats`	none	Print prefilter counters.
`-r`, `--beam-area-ratio`	`RATIO`	Small-fragment area ratio, at least 1; legacy default `100`.

10.4 Output, diagnostics, and legacy flags

Flag	Arguments	Description
`-o`	`NAME`	Output path/name.
`--close`	none	Exit after computation.
`--log`	`SEC`	Progress logging interval.
`--checkpoint`	none	Save/resume long `--orientfile`, `--oldauto`, and `--random` runs.
`--save_betas`	none	Save per-beta Mueller files.
`--full_only`	none	Write only full Mueller output. This is the default.
`--noshadow_output`	none	Also write `_noshadow` Mueller output.
`--shadow`	none	Legacy flag; currently no effect.
`--shadow_off`	none	Disable shadow beam. Diagnostic use.
`--incoh`	none	Incoherent per-beam Mueller sum.
`--jones`	none	Write Jones matrices where supported.
`--karczewski`	none	Use Karczewski polarization matrix.
`--legacy_sign`	none	Use old Fresnel sign convention.
`--ot_phase_avg`	none	Average optical-theorem extinction over one far-reference phase period.
`--ot_phase_shift`	`F`	Diagnostic optical-theorem phase shift in wavelengths.
`--ot_ping`	`D`	Legacy far-screen optical-theorem phase rotation.
`--filter`	`DEG`	Restrict output to backscatter cone.
`--point`	none	Legacy backscatter point mode.
`--tr`	`FILE`	Load trajectory file.
`--all`	none	Calculate all loaded trajectories.
`--gr`	none	Output trajectory groups.
`--forced_convex`	none	Force convex processing.
`--forced_nonconvex`	none	Force nonconvex processing.
`--help`, `-h`	none	Print help.
`--help-debug`	none	Print full debug/experimental help.

11 Environment variables

Every active `MBS_*` variable is written to the run summary. Variables that alter sampling, geometry, cutoffs, or numerical results are rejected by default. The debug option `--allow-experimental-environment` permits them after explicit acknowledgement and records their names and values. Prepared-orientation modes start with a 16-orientation pilot, measure nested beam/path allocations, and adapt the next chunk to current available RAM and the configured limits.

Production-use variables:

Variable	Meaning
CUDA_VISIBLE_DEVICES	Standard CUDA device visibility control.
OMP_NUM_THREADS	OpenMP default thread count when `--threads` is not used.
MBS_GPU_ALLOW_FALLBACK=1	Allow old GPU-to-CPU fallback after CUDA failure. Debug only.
MBS_GPU_MEM_FRACTION	Fraction of free GPU memory allowed for internal buffers.
MBS_GPU_NO_ATOMICS	Select no-atomic (1) or atomic (0) GPU accumulation path when possible.
MBS_GPU_FUSED_MUELLER	Select fused diffraction-to-Mueller kernels when no-atomic mode is active.
MBS_GPU_STAGE_MUELLER	Enable staged per-orientation Mueller reduction when supported.
MBS_GPU_NO_VERTEX_CACHE	Disable cached/packed vertex path for debugging.
MBS_GPU_COMPACT_BEAMS=0	Disable compact packing for beams with at most 8 vertices.
MBS_GPU_COMPACT_BEAM4_SPLIT=0	Disable automatic four-vertex records for triangles/quadrilaterals.
MBS_GPU_WARP_BEAMS=0/1	Override the automatic thread-per-output or warp-per-output reduction choice.
MBS_GPU_WARP_GRID_3D=0	Disable the 3D-grid specialization when warp reduction is active.
MBS_GPU_THREAD_GRID_3D=0/1	Override the automatically selected tiled 3D grid for the consumer thread path.
MBS_GPU_TIMING	Print CUDA timing breakdowns.
MBS_GPU_BLOCK	Override CUDA kernel block size.
MBS_GPU_TRACE_OPENMP	Enable automatic CUDA tracing from OpenMP workers; default 1.
MBS_GPU_TRACE_BATCH_BEAMS	Override the automatic per-worker batch $\max(64, \lceil 512/N_{\text{workers}} \rceil)$.
MBS_GPU_TRACE_INFLIGHT_BEAMS	Limit all OpenMP workers to a combined in-flight trace budget; default 512, minimum 32.
MBS_GPU_TRACE_FULL_SORT	Exact CUDA topological ordering; default 1.
MBS_GPU_TRACE_SORT_CACHE	Cache exact CUDA ordering; default 1.
MBS_GPU_TRACE_LARGE_SKIP_FLAGS	Conservative projected skip flags for large candidate lists; default 1.
MBS_GPU_TRACE_LARGE_THREADS	Large-list CUDA block size; default 64.
MBS_GPU_TRACE_CACHE_FACETS	Cache packed facet geometry; default 1.
MBS_GPU_TRACE_MIN_CANDIDATES	Minimum candidates per submitted batch; default 1024.
MBS_GPU_TRACE_NONBLOCKING_STREAM	Per-worker nonblocking streams; default 1; set 0 for serialization diagnostics.
MBS_GPU_TRACE_PROCESS_LOCK	Per-physical-GPU process lock for heavy trace batches; default 1; set 0 only for diagnostics.
MBS_GPU_TRACE_TIMING	Print CUDA tracing timing breakdown.
MBS_GPU_TRACE_VERIFY_SORT	Verify CUDA ordering against CPU.
MBS_ORIENTATION_TIMING	Print summed CPU time for rotation, tracing, and prepared-beam construction.
MBS_HOST_MEM_FRACTION	Fraction of current available host memory for measured prepared-orientation chunks.
MBS_HOST_MEM_RESERVE_MB	Host memory reserve in MB.
MBS_HOST_MEM_BUDGET_MB	Hard host memory budget, also set for parallel children.
MBS_FFT_PHI_FACTOR	Legacy FFT compression-factor override when `--fft-factor` is absent; the explicit CLI value has priority.
MBS_GPU_MULTI=0	Disable automatic multi-orientation GPU batching.
MBS_GPU_MULTI_MAX=N	Cap automatic GPU multi batching.
MBS_GPU_GROUPS=1	Distribute variable latitude-phi theta groups across visible GPUs.
MBS_GPU_MULTI_K_FULL=0/1	Fused multi-size diffraction; automatic for supported FP64 scans, opt-in for float.
MBS_BEAM_LOG=PATH	Write the first handled PO beam set to the explicit diagnostic path. No beam log is written by default.
MBS_SHARED_BETA_GROUP=N	Override shared-batch beta grouping.
MBS_SHARED_ORIENT_CHUNK=N	Override shared-batch orientation chunk size.
MBS_PARALLEL_MEM_FRACTION	Memory fraction used by parallel multi-size scheduler.
MBS_PARALLEL_SHARED_KEQ=1	Environment equivalent of shared `k_eq` batching.
MBS_PARALLEL_KEQ_BATCH_RATIO=R	Environment default for shared batch ratio.

Diagnostic variables exist for FFT refinement, autofull heuristics, trace prefilters, and internal debug

ranges. They are intentionally not recommended for normal production runs; inspect `grep -R "getenv(\"MBS_" src` when debugging a specific subsystem.

12 Output

Main output is a whitespace-separated `.dat` file:

```
ScAngle 2pi*dcos M11 M12 M13 M14 M21 M22 M23 M24 M31 M32 M33 M34 M41 M42 M43 M44
```

Column	Meaning
`ScAngle`	Scattering angle theta in degrees.
`2pi*dcos`	Solid-angle ring weight for this theta row.
`Mij`	Mueller matrix elements after beam and orientation averaging.

Common companion outputs:

Output	Created by	Meaning
`_noshadow` file	`--noshadow_output`	Mueller matrix without shadow/external beam contribution.
`_betas/` directory	`--save_betas`	Per-beta Mueller diagnostics.
checkpoint files	`--checkpoint`	Resume data for long orientation-grid runs.
Jones output	`--jones`	Raw Jones matrices in supported PO modes.
`FILE` from `--save-geometry`	explicit request	Effective scaled native particle at a stable user-selected path.
`<result>_integrals.tsv`	PO and GO output	Machine-readable primary extinction, scattering, absorption, efficiencies, and the numerical C_{sca} error estimate.

The log and TSV expose exactly one method-specific definition of each physical quantity:

$$C_{\text{ext}}, \quad C_{\text{sca}}, \quad C_{\text{abs}}, \qquad Q_{\text{ext}}, \quad Q_{\text{sca}}, \quad Q_{\text{abs}}, \qquad Q_x = \frac{C_x}{A_{\text{proj}}}.$$

For PO, C_{ext} comes from the forward-amplitude optical theorem. For an absorbing material, $C_{\text{sca}} = \sum_j M_{11}(\theta_j)\Delta\Omega_j$ and $C_{\text{abs}} = C_{\text{ext}} - C_{\text{sca}}$. For a nonabsorbing material, conservation gives $C_{\text{sca}} = C_{\text{ext}}$ and $C_{\text{abs}} = 0$. For GO, $C_{\text{ext}} = A_{\text{proj}}$; the absorbing case uses the total outgoing beam energy for C_{sca} and the difference for C_{abs}. The nonabsorbing GO case again enforces $C_{\text{sca}} = C_{\text{ext}}$ and $C_{\text{abs}} = 0$. Legacy PO/GO hybrids and duplicate labels are deliberately omitted from the report.

The C_{sca} integration estimate compares the full theta grid with a nested grid formed from every second theta row:

$$\hat{\epsilon}_{\text{sca}} = \frac{|C_{\text{sca},h} - C_{\text{sca},2h}|}{\max(|C_{\text{sca},h}|, |C_{\text{sca},2h}|)}.$$

For a nonabsorbing run the report conservatively takes the larger of this estimate and the independent conservation mismatch: the M_{11} integral versus optical-theorem extinction in PO, or outgoing beam sum versus projected area in GO. Fewer than five theta rows cannot form the estimate and are marked `unavailable`. A value above 1 percent produces `check_csca_integration`. This is an a-posteriori resolution check, not a rigorous error bound and not an orientation-convergence estimate.

The TSV columns are `method`, `label`, `status`, the six C/Q values, and `Csca_error_estimate_rel`. It contains no legacy, GO-in-PO, or PO-in-GO alternatives.

The startup and final log blocks also record hostname, CPU model, logical and physical core counts, effective OpenMP thread count, total/available RAM, process RSS and peak RSS, visible GPU models, and active-device VRAM when CUDA is available. The final log contains the FFT and cutoff audit blocks described above. These records make timing and accuracy comparisons attributable to a specific resource state; GPU timings obtained while another process occupies the device are not comparable to an idle-device benchmark.

Normal runs do not create diagnostic files in the current working directory. Use `MBS_BEAM_LOG=PATH` only when an explicit first-beam dump is needed.

For nonabsorbing runs physical absorption is fixed to zero. The reported C_{sca} error remains a convergence diagnostic and does not replace inspection of the output Mueller matrix.

13 Calibrated multi-level GPU acceleration

The portable controller combines depths 8, 10 and 12, with the last cutoff disabled. Independent pilots select azimuth count, CUDA kernel and frozen analytic coefficients. Actual pointwise intervals and two refinement checks determine stopping. See the Markdown manual for full details.

```
python3 scripts/run_gpu_optimized.py \
  --binary gpu/bin/mbs_po_gpu_double --case test1 \
  --output results/test1 --calibrate \
  --depths 8 10 12 --level-cutoffs .001 off off \
  --gpus 0 1 2 3 --threads 16
```

13.0.0.1 Backward angular range. The `--case test3` preset selects the 316.2 by 123.8 micrometre column and 227 angles from 170 to 180 degrees. An external theta file preserves reference nodes. Device lists may contain any number of distinct GPUs. For a separate weak-beam correction use:

```
--analytic-controls off --gpus 1 2 3
--depths 8 12 18 18 --level-cutoffs .001 .001 .001 off
--initial-counts 131072 8192 8192 1024
--min-correction-count 1024
```

The final level estimates depth18 with no cutoff. Equal depths require a strictly smaller cutoff. Disabling analytic components preserves the full coherent estimator when known-mean tables exceed their budget.