

Product	Panoramic Scanner	Version:	V1.0	Date:	13/06/2024
Contact	yesongnan@hikmicrotech.com			Page:	1 of 5
Title	How to configure Perimeter Protection for Panoramic Scanner				


HOW TO CONFIGURE PERIMETER PROTECTION FOR PANORAMIC SCANNER

PREPARATION

Enter the IP, User and Password, click the button of Login via web page.


CONFIGURATION

STEP 1: Configuration → Local → Display the local rule information

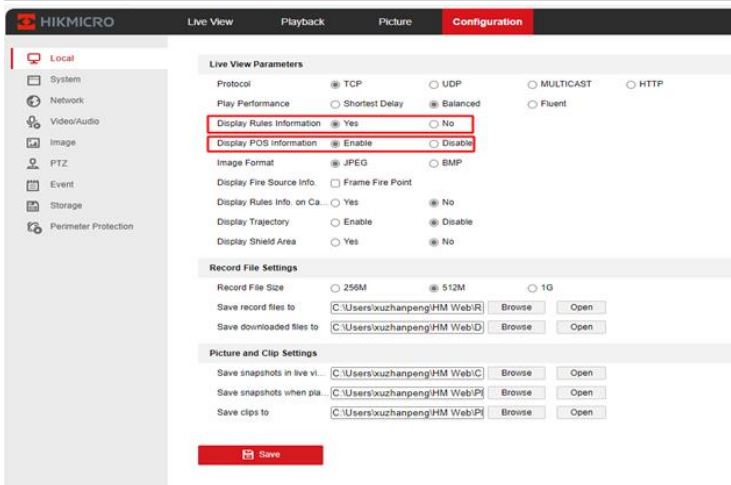

STEP 2: Live View → Focus

Enter Live View, select the PTZ Control Mode for the movement mode, rotate the PTZ to the area where there are target objects without obstruction, and click Manual Focus to focus the image clearly.

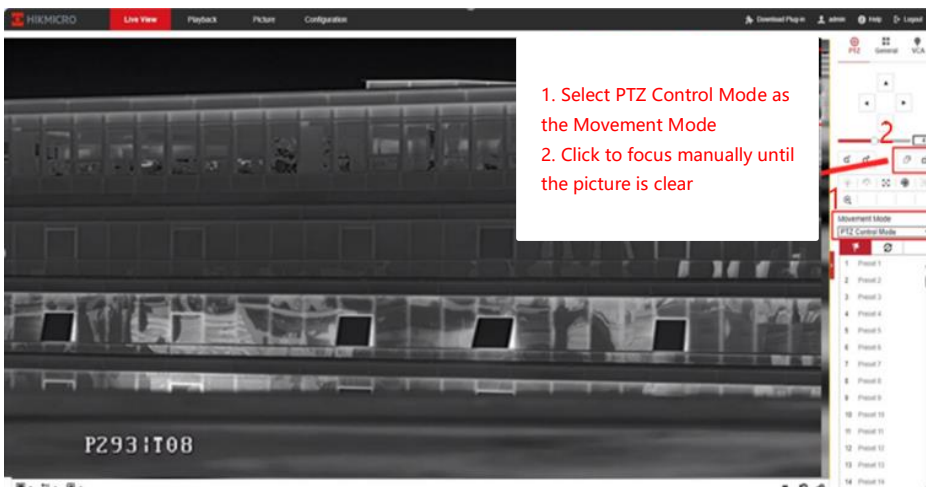

Product	Panoramic Scanner	Version:	V1.0	Date:	13/06/2024
Contact	yesongnan@hikmicrotech.com			Page:	2 of 5
Title	How to configure Perimeter Protection for Panoramic Scanner				


STEP 3: Switch Panorama

Switch the movement mode to Radar Mode to generate the panoramic image.




STEP 4: Configure Scanning Speed: Configuration → PTZ → Basic Settings

Select Radar Mode and Perimeter Protection Scanning Speed.

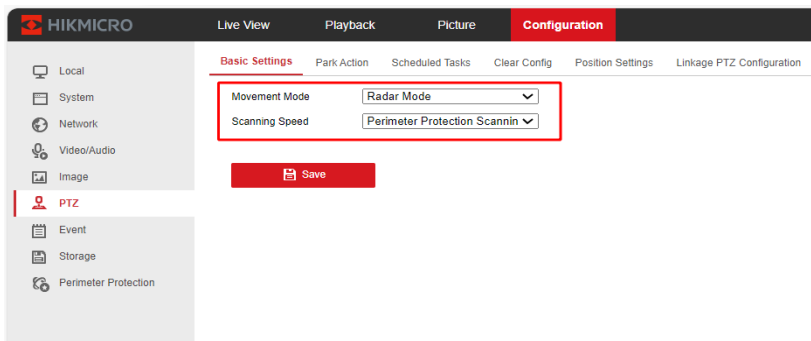

STEP 5: Enable Intelligent Analysis: Configuration → Perimeter Protection → Basic Settings


Tick Intelligent Analysis, tick the rest as required.

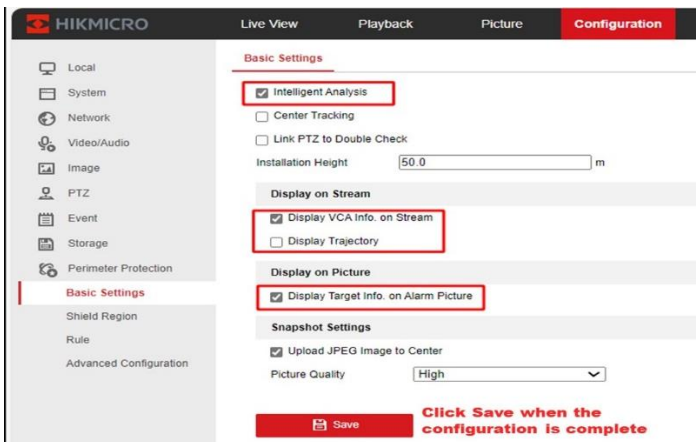

Product	Panoramic Scanner	Version:	V1.0	Date:	13/06/2024
Contact	yesongnan@hikmicrotech.com			Page:	3 of 5
Title	How to configure Perimeter Protection for Panoramic Scanner				

STEP 6: Choose the Scene type:

For example, the detection of people and vehicles can choose land. Select this parameter based on the detection scenario and detection target.

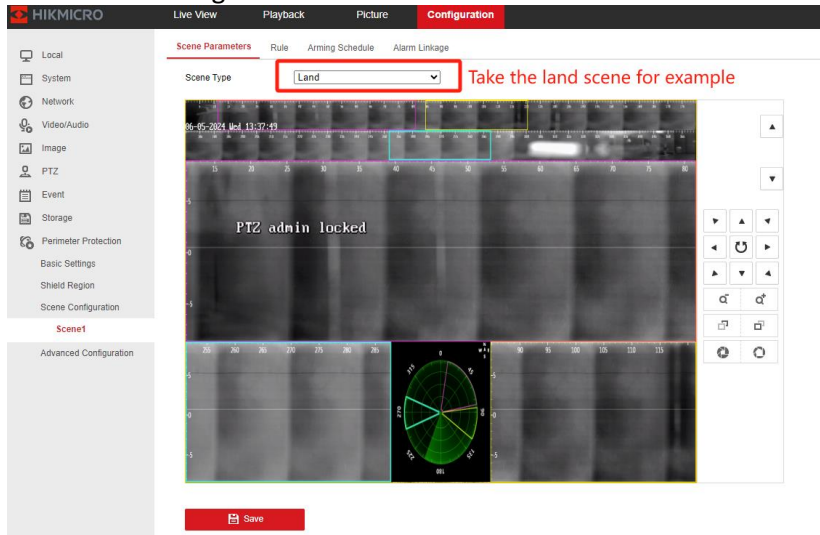


Scene Type: Water, Detection target: Ships

Scene Type: Sky, Detection target: UAV

STEP 7: Load Panoramic Map: Configuration → Perimeter Protection → Rule


Click to generate panoramic map.

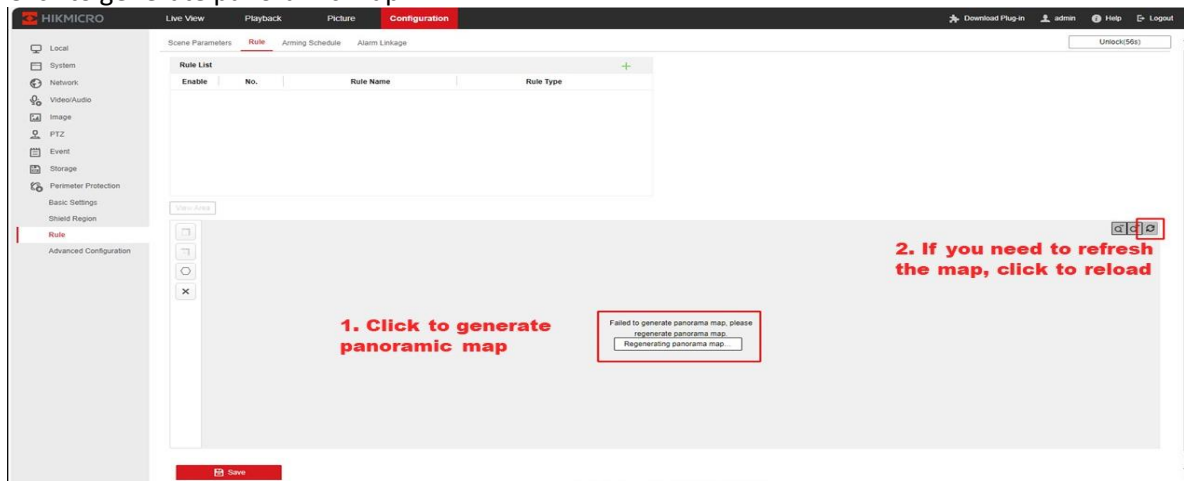

Product	Panoramic Scanner	Version:	V1.0	Date:	13/06/2024
Contact	yesongnan@hikmicrotech.com			Page:	4 of 5
Title	How to configure Perimeter Protection for Panoramic Scanner				

STEP 8: Configure Corresponding Rules: Configuration → Perimeter Protection → Rule

Configure corresponding rules as required.

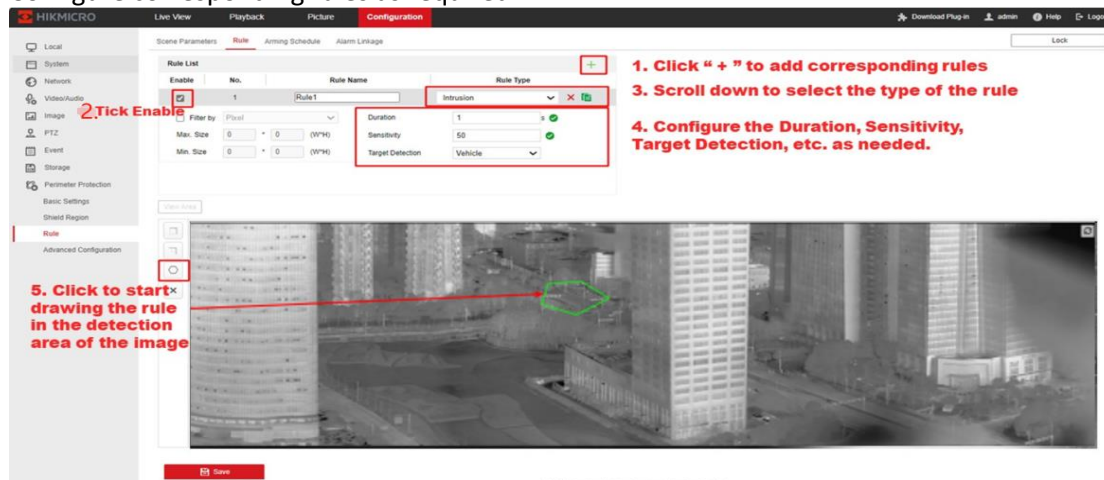

1. Click “+” to add corresponding rules

2. Tick Enable


3. Scroll down to select the type of the rule

4. Configure the Duration, Sensitivity, Target Detection, etc. as needed.

5. Click to start drawing the rule in the detection area of the image

STEP 9: Configure Arming Schedule: Configuration → Perimeter Protection → Rule → Arming Schedule

Select 7*24 arming.

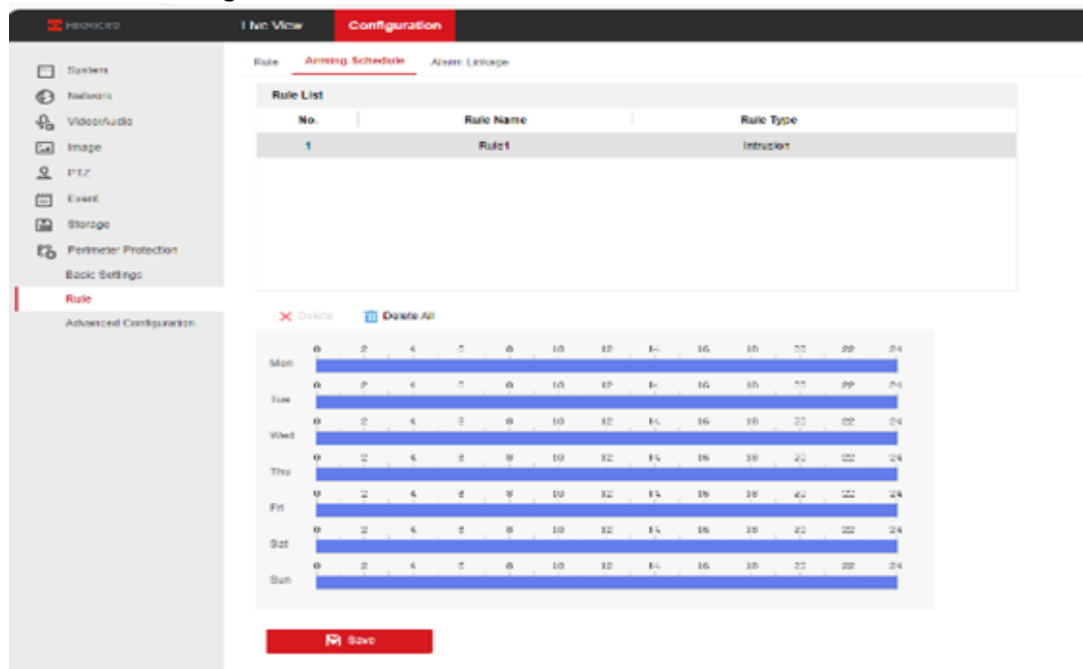

Rule List

No.	Rule Name	Rule Type
1	Rule1	Intrusion

Arming Schedule

Online (Blue bar) | Offline (Grey bar)

Mon: 00:00 - 24:00 (Online)

Tue: 00:00 - 24:00 (Online)

Wed: 00:00 - 24:00 (Online)

Thu: 00:00 - 24:00 (Online)

Fri: 00:00 - 24:00 (Online)


Sat: 00:00 - 24:00 (Online)

Sun: 00:00 - 24:00 (Online)

Save

Product	Panoramic Scanner	Version:	V1.0	Date:	13/06/2024
Contact	yesongnan@hikmicrotech.com			Page:	5 of 5
Title	How to configure Perimeter Protection for Panoramic Scanner				

STEP 10: Configure Alarm Linkage: Configuration → Perimeter Protection → Rule → Alarm Linkage

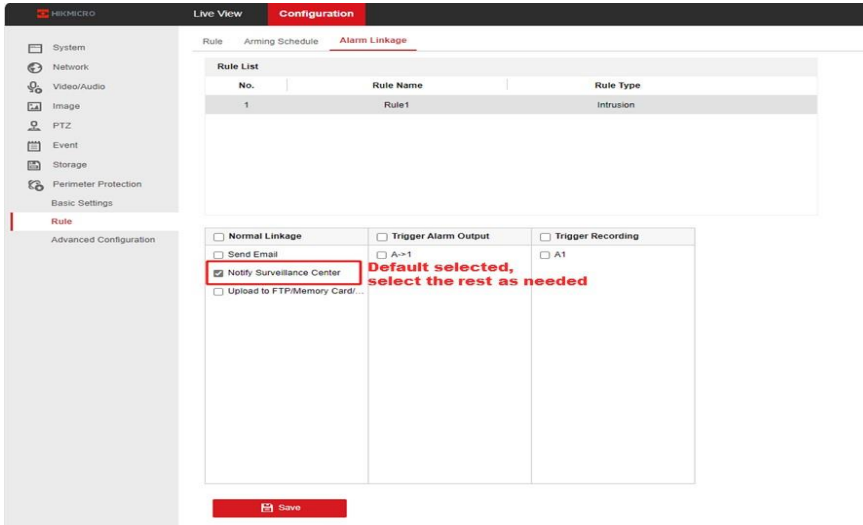

Rule List

No.	Rule Name	Rule Type
1	Rule1	Intrusion

Normal Linkage

☒ Notify Surveillance Center **Default selected, select the rest as needed**

☐ Send Email

☐ Upload to FTP/Memory Card...

Trigger Alarm Output

☐ A1

Trigger Recording


☐ A1

Save

STEP 11: Configure Advanced Parameters: Configuration → Perimeter Protection → Rule → Advanced Configuration

Advanced Configuration

Configure the information in the red box as required (PS: Usually, the default parameters are sufficient. In special scenarios, you can refer to the help document on the web to adjust the parameters as required).

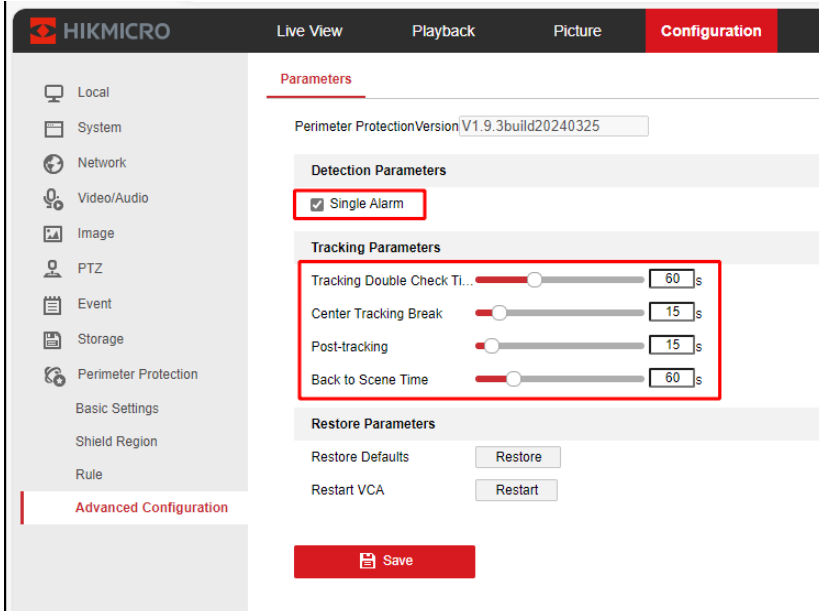

Parameters

Perimeter Protection Version V1.9.3 build 20240325

Detection Parameters

☒ Single Alarm

Tracking Parameters

Tracking Double Check Time: 60 s

Center Tracking Break: 15 s

Post-tracking: 15 s

Back to Scene Time: 60 s

Restore Parameters

Restore Defaults **Restore**

Restart VCA **Restart**

Save