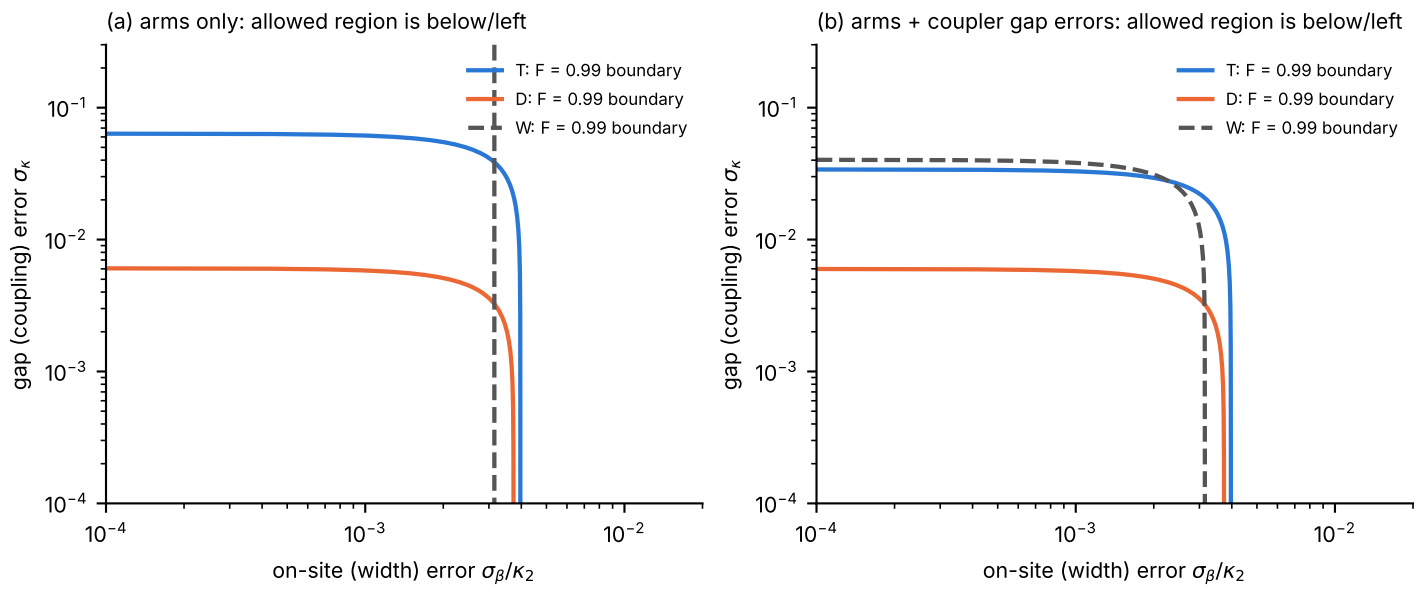
(a) arms only: allowed region is below/left
T: F = 0.99 boundary
D: F = 0.99 boundary
W: F = 0.99 boundary
gap (coupling) error σ_κ
on-site (width) error σ_β/κ_2
10^{-1}
10^{-2}
10^{-3}
10^{-4}
(b) arms + coupler gap errors: allowed region is below/left
T: F = 0.99 boundary
D: F = 0.99 boundary
W: F = 0.99 boundary
gap (coupling) error σ_κ
on-site (width) error σ_β/κ_2