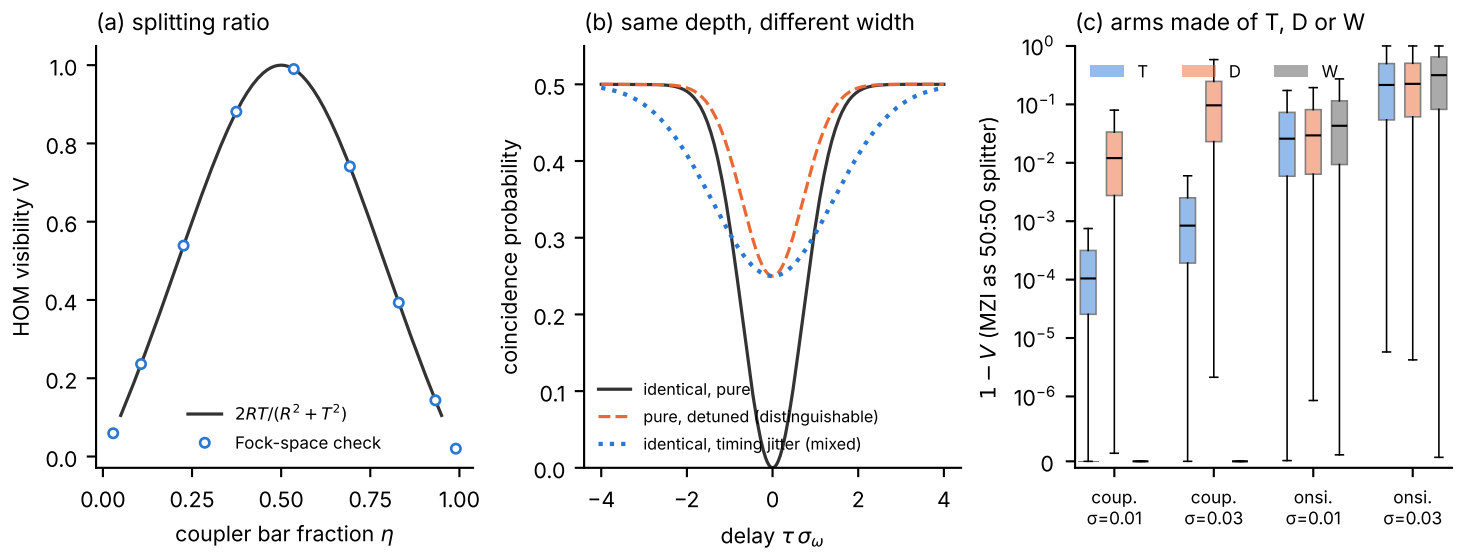
(a) splitting ratio
HOM visibility V
coupler bar fraction η
2RT/(R² + T²)
Fock-space check
(b) same depth, different width
coincidence probability
delay τ σω
identical, pure
pure, detuned (distinguishable)
identical, timing jitter (mixed)
(c) arms made of T, D or W
1 − V (MZI as 50:50 splitter)
T
D
W
coup. σ=0.01
coup. σ=0.03
onsi. σ=0.01
onsi. σ=0.03