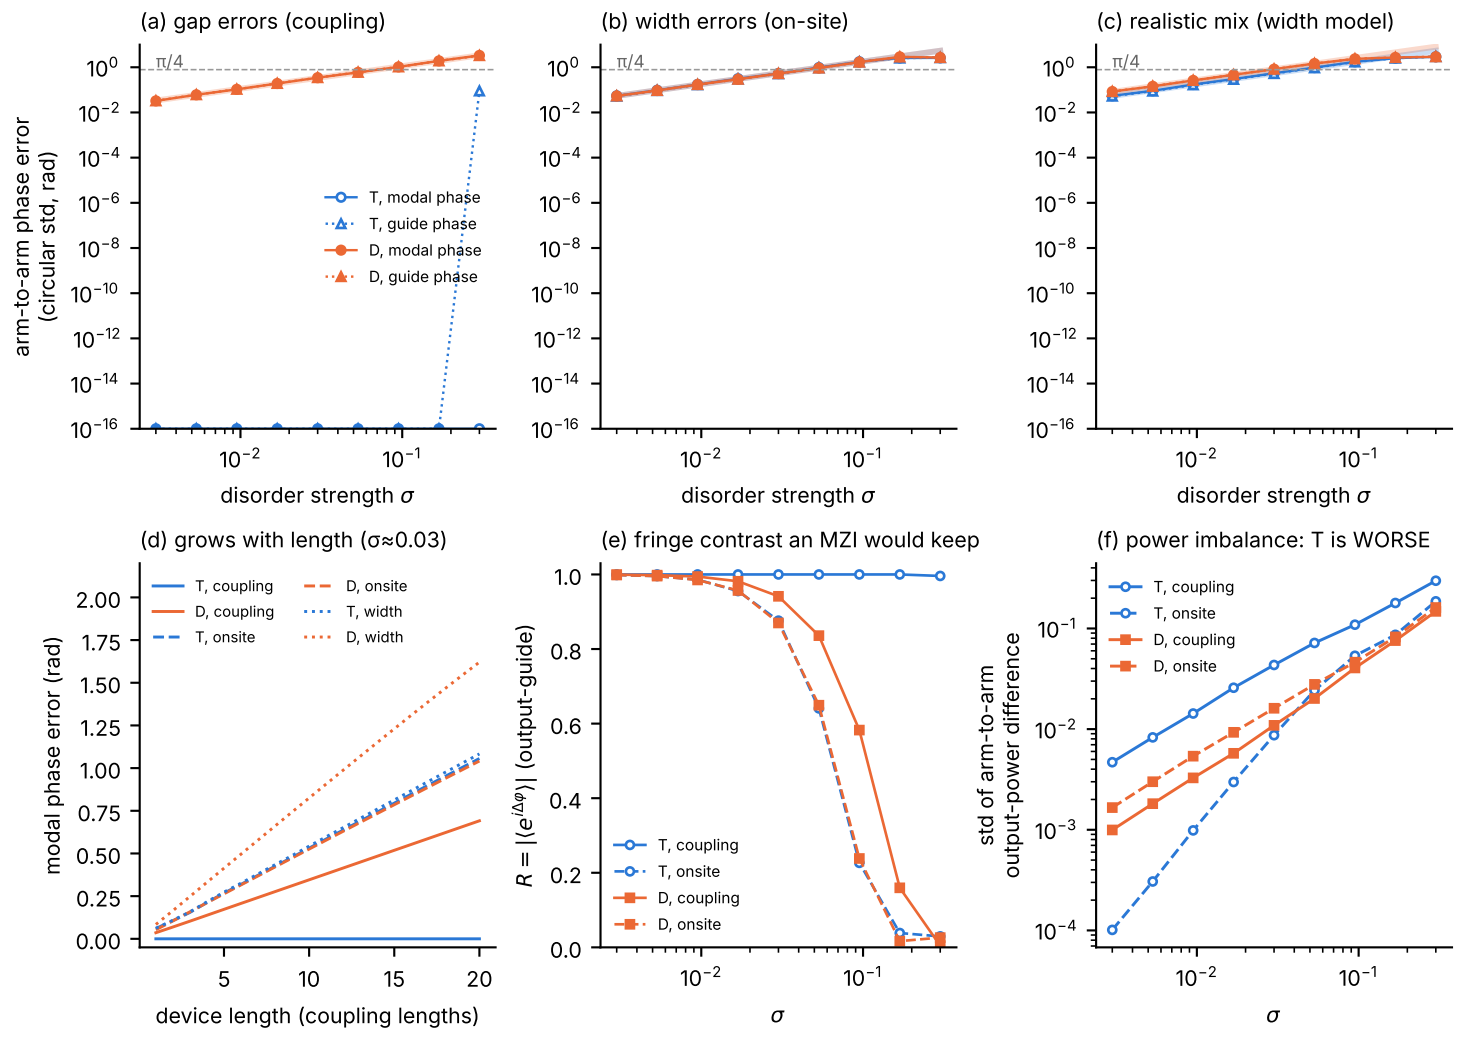
(a) gap errors (coupling)
(b) width errors (on-site)
(c) realistic mix (width model)
arm-to-arm phase error (circular std, rad)
π/4
T, modal phase
T, guide phase
D, modal phase
D, guide phase
disorder strength σ
(d) grows with length (σ≈0.03)
T, coupling
D, coupling
T, onsite
D, onsite
T, width
D, width
modal phase error (rad)
device length (coupling lengths)
(e) fringe contrast an MZI would keep
R = |⟨e^{iΔφ}⟩| (output-guide)
σ
(f) power imbalance: T is WORSE
std of arm-to-arm output-power difference