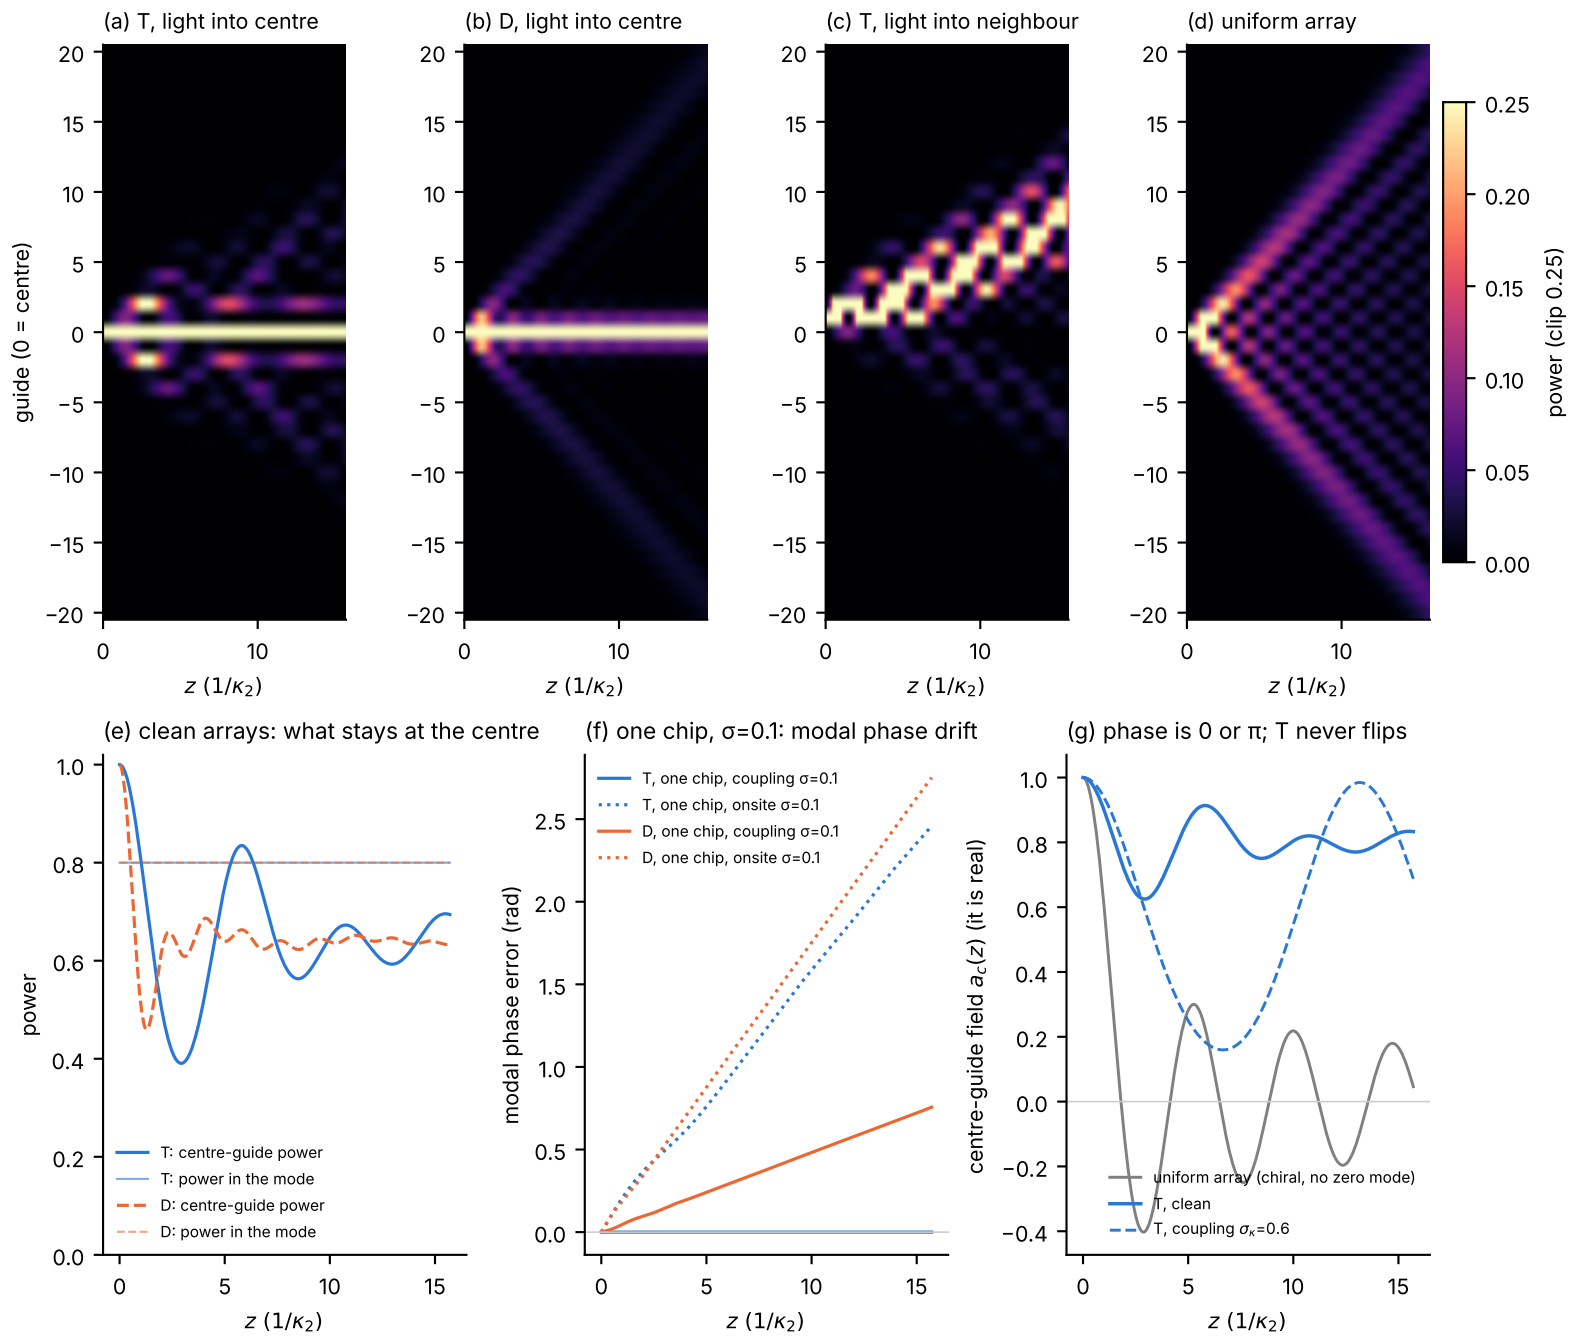

(a) T, light into centre
(b) D, light into centre
(c) T, light into neighbour
(d) uniform array
guide (0 = centre)
z (1/κ2)
power (clip 0.25)
(e) clean arrays: what stays at the centre
power
T: centre-guide power
T: power in the mode
D: centre-guide power
D: power in the mode
(f) one chip, σ=0.1: modal phase drift
modal phase error (rad)
T, one chip, coupling σ=0.1
T, one chip, onsite σ=0.1
D, one chip, coupling σ=0.1
D, one chip, onsite σ=0.1
(g) phase is 0 or π; T never flips
centre-guide field ac(z) (it is real)
uniform array (chiral, no zero mode)
T, clean
T, coupling σκ=0.6