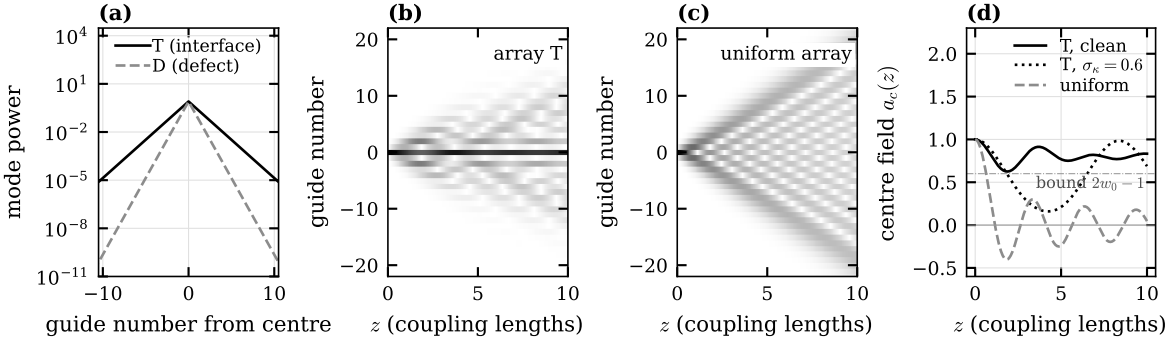
(a)
T (interface)
D (defect)
mode power
guide number from centre
(b)
array T
guide number
z (coupling lengths)
(c)
uniform array
guide number
z (coupling lengths)
(d)
T, clean
T, $\sigma_\kappa = 0.6$
uniform
bound $2w_0 - 1$
centre field $a_c(z)$
z (coupling lengths)