Experiment: 7
Date: 26/09/24


Design a simple topology & configure 1 Router, 2 Switches and PCs using Cisco packet tracer.

AIM:

To design and configure a simple network topology consisting of one router, 2 switches, 4 PCs using Cisco packet Tracer.

PROCEDURE:

1. Open Cisco packet tracer
2. Add devices: 1. Router (Cisco 1941/2811)
   2. Switches (Cisco 2960)
   4 PCs
3. Connect the devices with a copper - Straight through cables
4. Open router CLI - configure Interface fa0/0, fa0/1 & save configuration
5. Open PC0 → desktop → Ip configuration then configure Ip address, subnet mask & default gateway.
6. Similarly configure PC1, PC2, PC3
7. Test connectivity PC0 → PC1
   PC0 - command prompt → ping 192.168.1.3

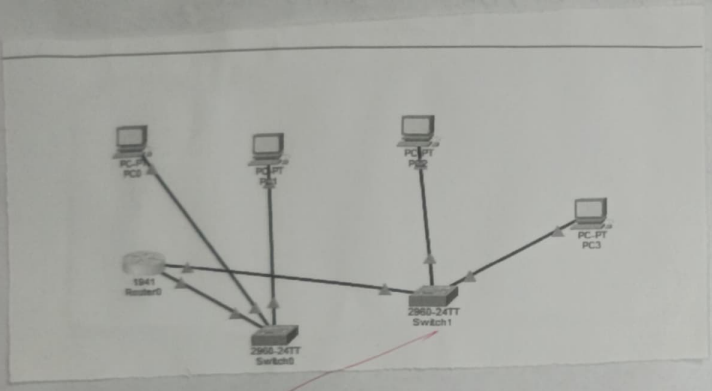

RESULT:

Thus, the simple network topology with Cisco packet tracer has been implemented & verified successfully.