





A-A (1 : 2)

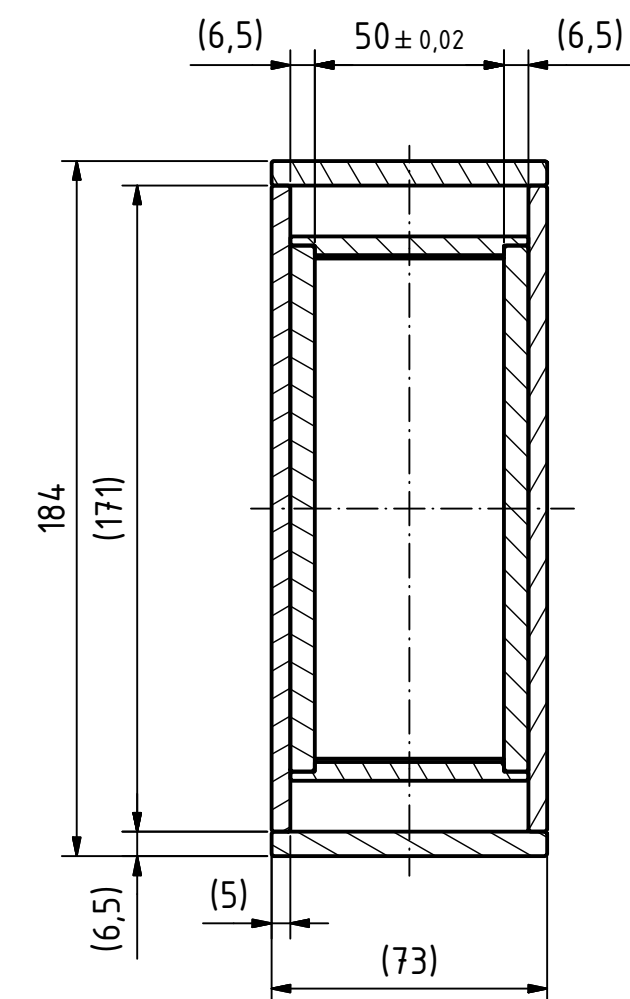

Truly curved parabolic guide

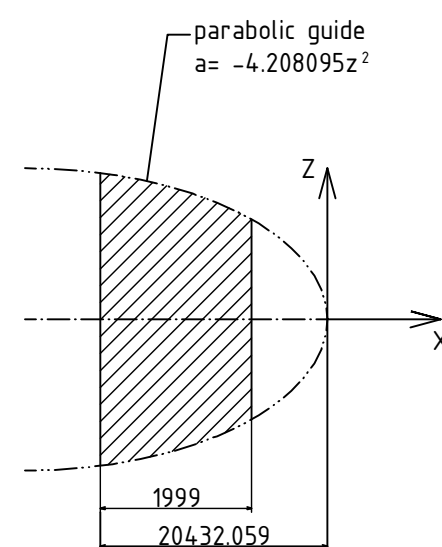

Scratch-marks:
horizontal & vertical
scratch-marks on ng-unit
entrance and exit front faces

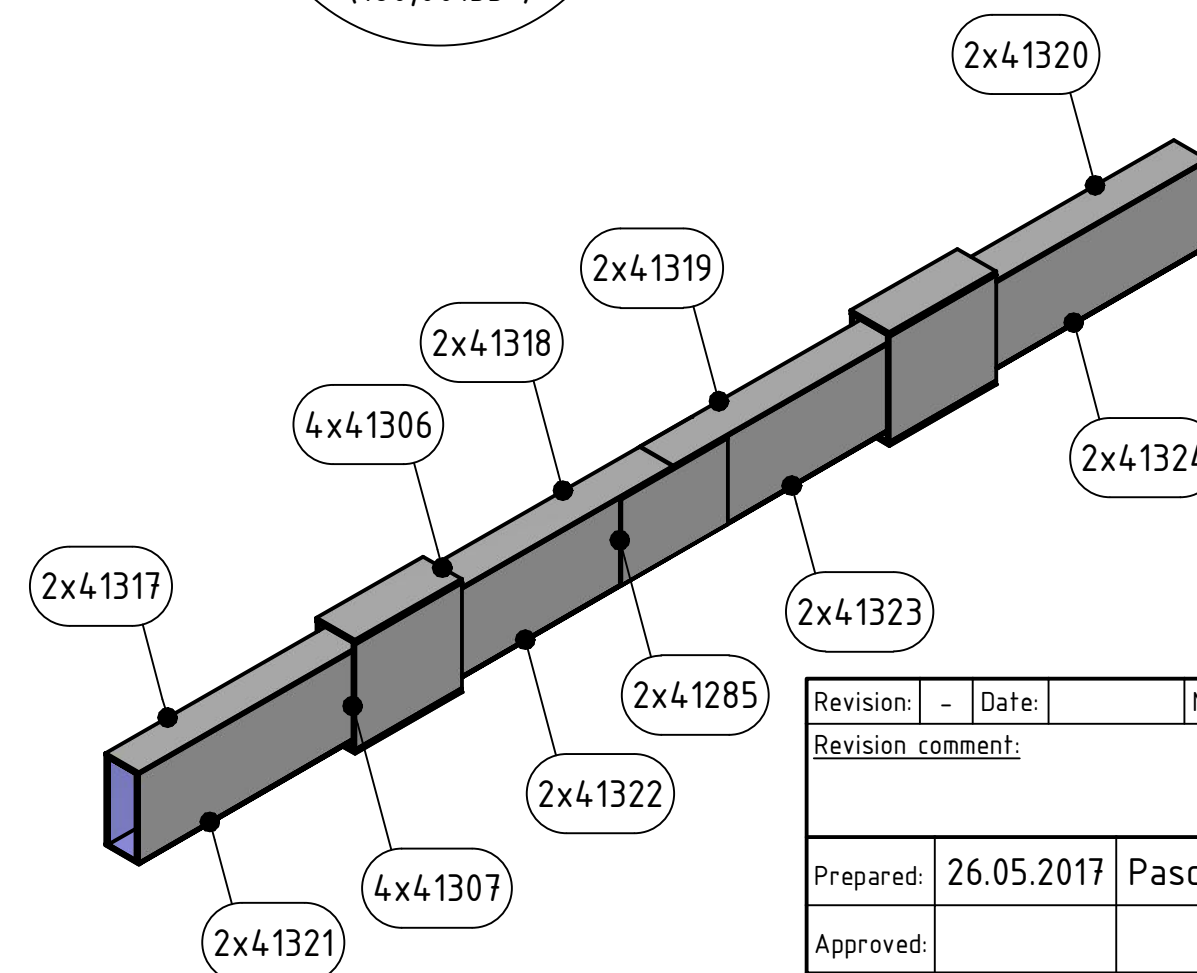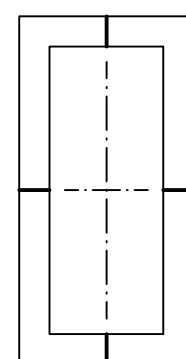

03	Test pressure: $< 5 \times 10^{-2}$ mbar
02	Max. leak rate: 1×10^{-7} mbar * l/s
01	General tolerances ISO 2768-mK
01	All dimensions are in millimeter
No.	Notes

Revision:	-	Date:		Name:	
Revision comment:					
SN16070 NERA focusing guide					
DUBNA					
Prepared:	26.05.2017	Pascal Baumgartner		Dimensions ISO 14405 (E) / Dimensions = mm	
Approved:					

SwissNeutronics

41266- Unit-4.idw

