

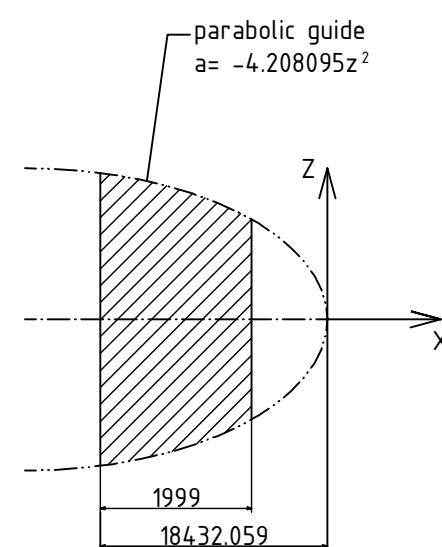


Truly curved parabolic guide

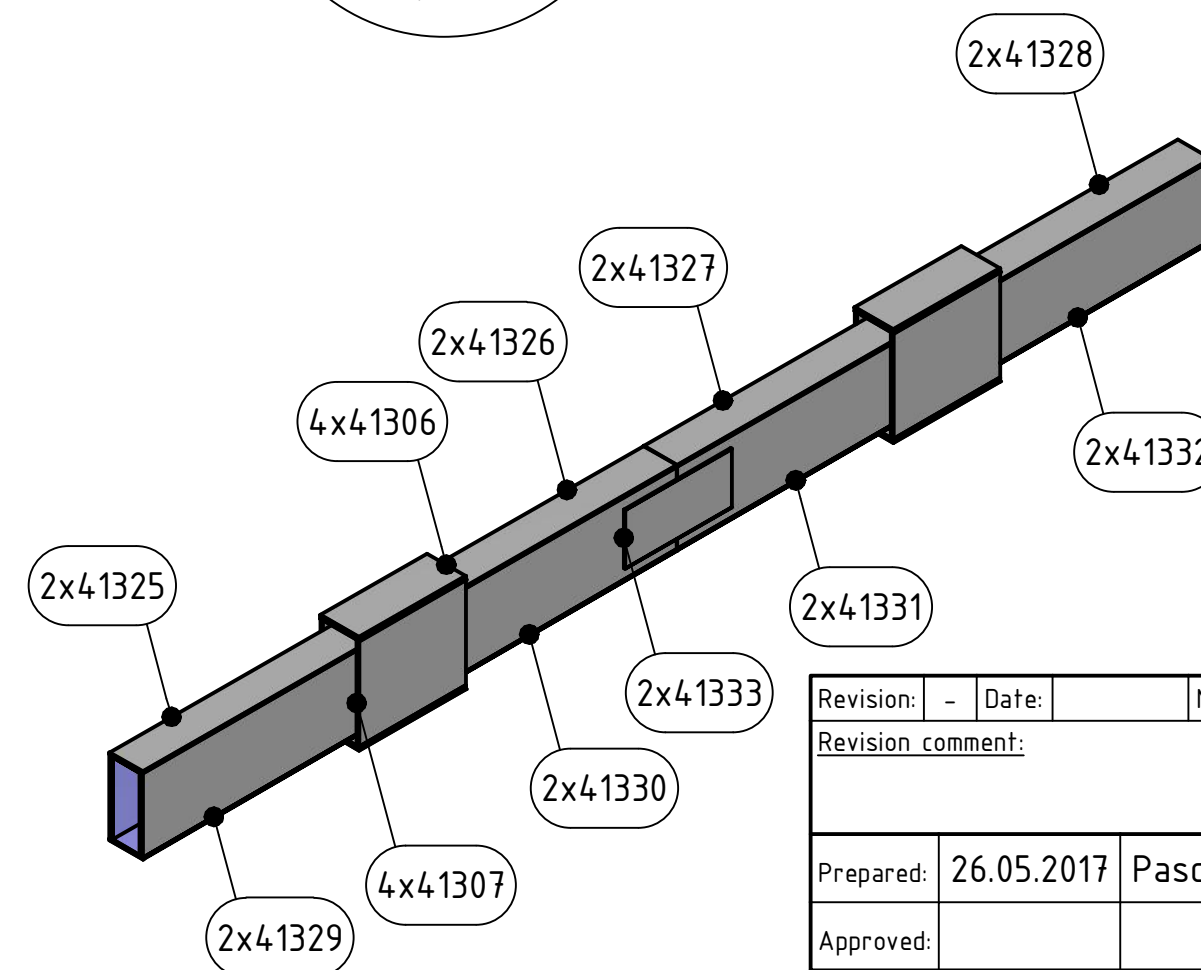

Scratch-marks:  
horizontal & vertical  
scratch-marks on ng-unit  
entrance and exit front faces

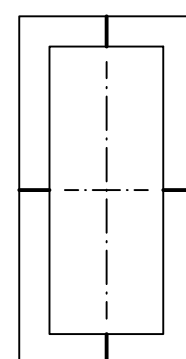

03	Test pressure: $< 5 \times 10^{-2}$ mbar
02	Max. leak rate: $1 \times 10^{-7}$ mbar * l/s
01	General tolerances ISO 2768-mK
01	All dimensions are in millimeter
No.	Notes

Revision:	-	Date:		Name:	
Revision comment:					
SN16070 NERA focusing guide					
DUBNA					
Prepared:	26.05.2017	Pascal Baumgartner	Dimensions ISO 14405 © / Dimensions = mm		
Approved:					

SwissNeutronics

41267- Unit-5.idw